



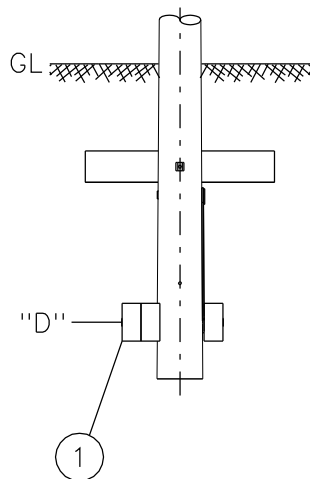

SIDE VIEW

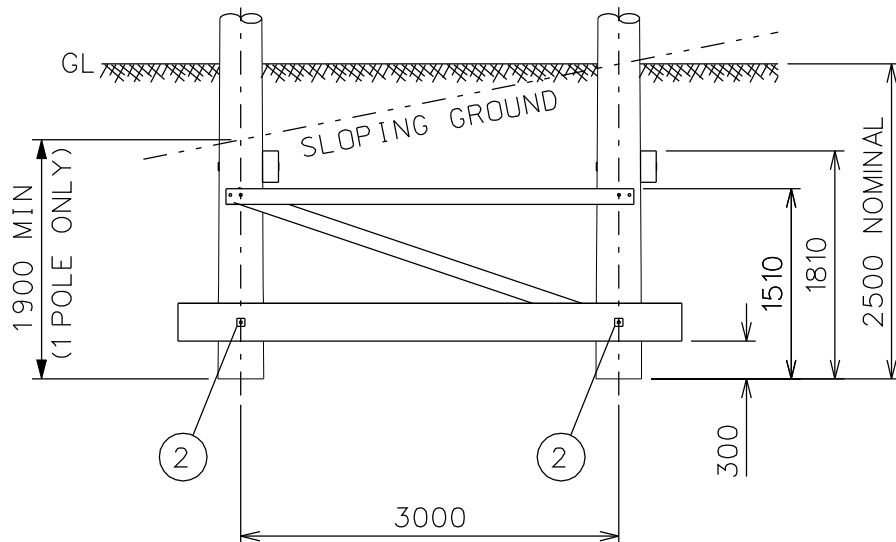

FRONT ELEVATION

ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1 "H" Pole Timber Baulk	LSTC/STD/PAR/731	1	154	Timber Baulk "D" in addition to LSTC/STD/GNA/500
2 M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.4	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3				
4				
5				
6				
7				
8				

Total Additional Calculated Weight = 159Kg

GENERAL NOTES:

1. ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
2. ALL DIMENSIONS ARE IN MILLIMETRES.
3. MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "AVERAGE" SOIL CONDITIONS ARE ENCOUNTERED. TO BE READ IN CONJUNCTION WITH:
LSTC/STD/GNA/500: H-POLE INTERMEDIATE STRUCTURE
LSTC/STD/GNA/501: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
4. IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.



CLIENT PowerSystems	TITLE ADDITIONAL MATERIAL - 'H' POLE INTERMEDIATE AVERAGE SOIL CONDITIONS	SCALE 1:60 (UNLESS OTHERWISE STATED) DATE 11/05/05 DRAWN R.F. DRAWING NUMBER LSTC/STD/GNA/788	ORIGINAL SIZE A4 CHECKED GS APPROVED PP REV 3	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
SPECIFICATION OHL-03-132				