


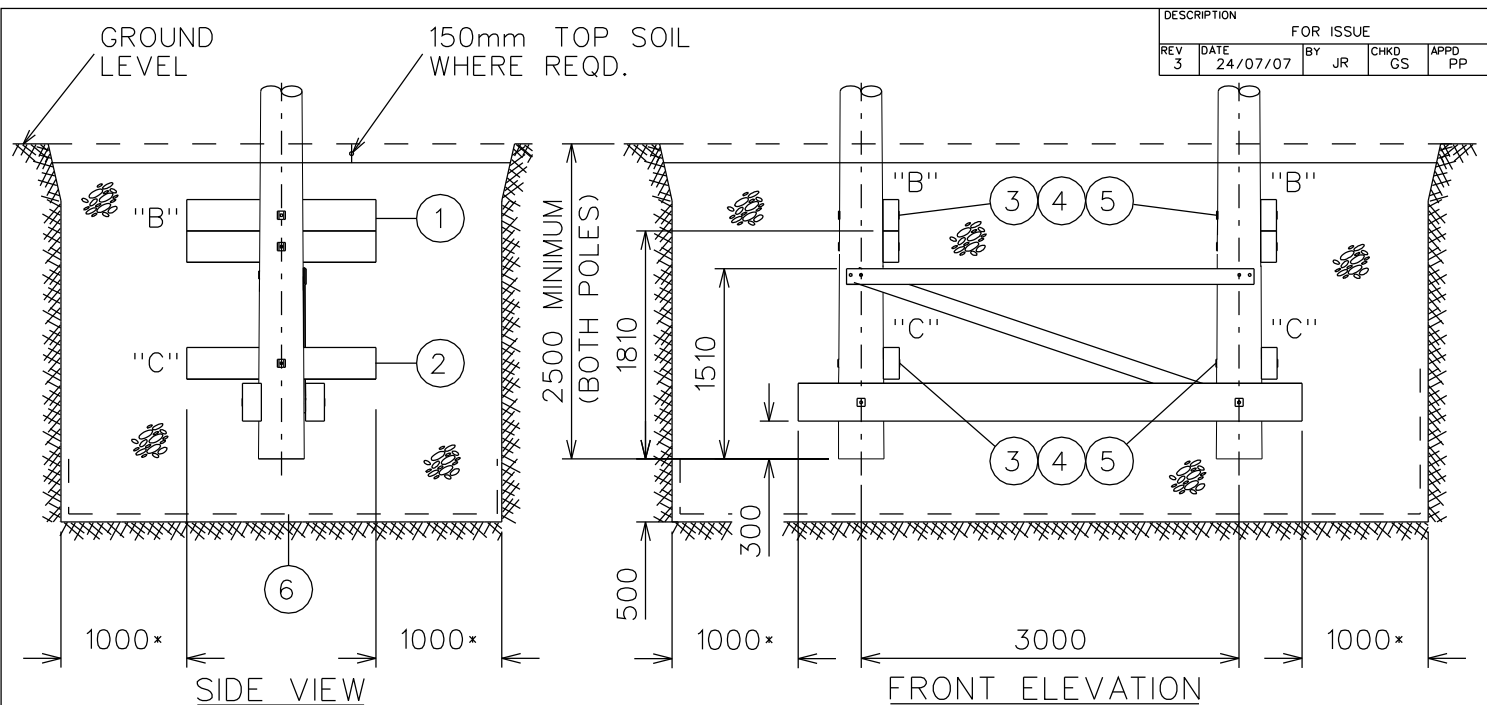

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1	Foundation Block	LSTC/STD/PAR/602	2	42	Foundation Block "B" in addition to LSTC/STD/GNA/500
2	Foundation Block	LSTC/STD/PAR/602	2	42	Foundation Block "C" in addition to LSTC/STD/GNA/500
3	Square Curved Spacer	LSTC/STD/PAR/620	4	0.2	Curved Washers in addition to LSTC/STD/GNA/500
4	Square Flat Washer	LSTC/STD/PAR/619	4	0.1	Flat Washers in addition to LSTC/STD/GNA/500
5	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	4	0.5	M20 Bolts to attach additional Foundation Blocks "B & C"
6	Geotextile Membrane	--	1	--	Place in Bottom of Excavation prior to Granular Backfill

Total Additional Calculated Weight = 172Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "VERY POOR" SOIL CONDITIONS ARE ENCOUNTERED. THESE FOUNDATIONS CAN ONLY BE INSTALLED IN LEVEL GROUND.

TO BE READ IN CONJUNCTION WITH:
LSTC/STD/GNA/500: H-POLE INTERMEDIATE STRUCTURE
LSTC/STD/GNA/501: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION

- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.



CLIENT	PowerSystems	TITLE	ADDITIONAL MATERIAL - 'H' POLE INTERMEDIATE VERY POOR SOIL CONDITIONS	SCALE	NTS (UNLESS OTHERWISE STATED)	ORIGINAL SIZE	A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
SPECIFICATION	OHL-03-132			DATE	11/05/05	CHECKED	GS	
				DRAWN	R.F.	APPROVED	PP	
				DRAWING NUMBER	LSTC/STD/GNA/790	REV	3	