



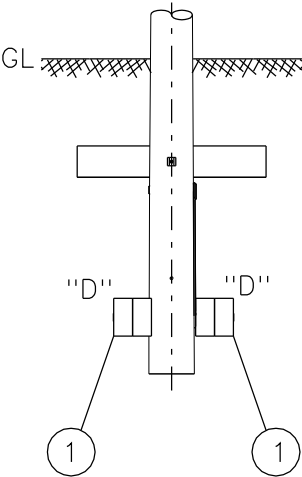

SIDE VIEW

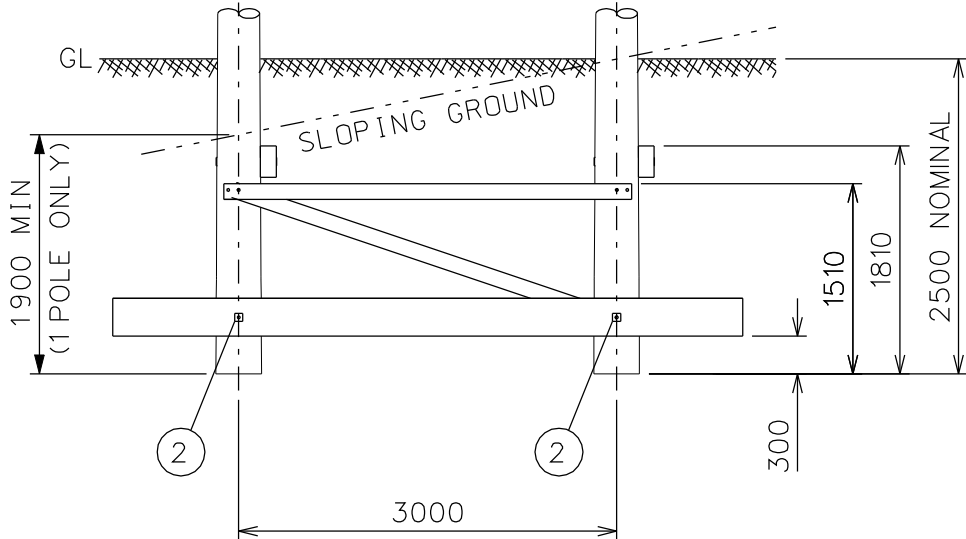

FRONT ELEVATION

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1	"H" Pole Timber Baulk	LSTC/STD/PAR/738	2	192.5	Timber Baulk "D" in addition to LSTC/STD/GNA/502
2	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.4	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3					
4					
5					
6					
7					
8					

Total Additional Calculated Weight = 390Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
 - ALL DIMENSIONS ARE IN MILLIMETRES.
 - MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "AVERAGE" SOIL CONDITIONS ARE ENCOUNTERED. TO BE READ IN CONJUNCTION WITH:
LSTC/STD/GNA/502: 0-5° ANGLE STRUCTURE
LSTC/STD/GNA/504: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
 - IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.
- SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.



CLIENT	PowerSystems	TITLE	ADDITIONAL MATERIAL 0-5° ANGLE STRUCTURE AVERAGE SOIL CONDITIONS	SCALE	1:60	ORIGINAL SIZE	A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617	
SPECIFICATION	OHL-03-132			(UNLESS OTHERWISE STATED)	DATE	11/05/05	CHECKED		GS
				DRAWN	R.F.	APPROVED	PP		
				DRAWING NUMBER	LSTC/STD/GNA/791		REV		3