


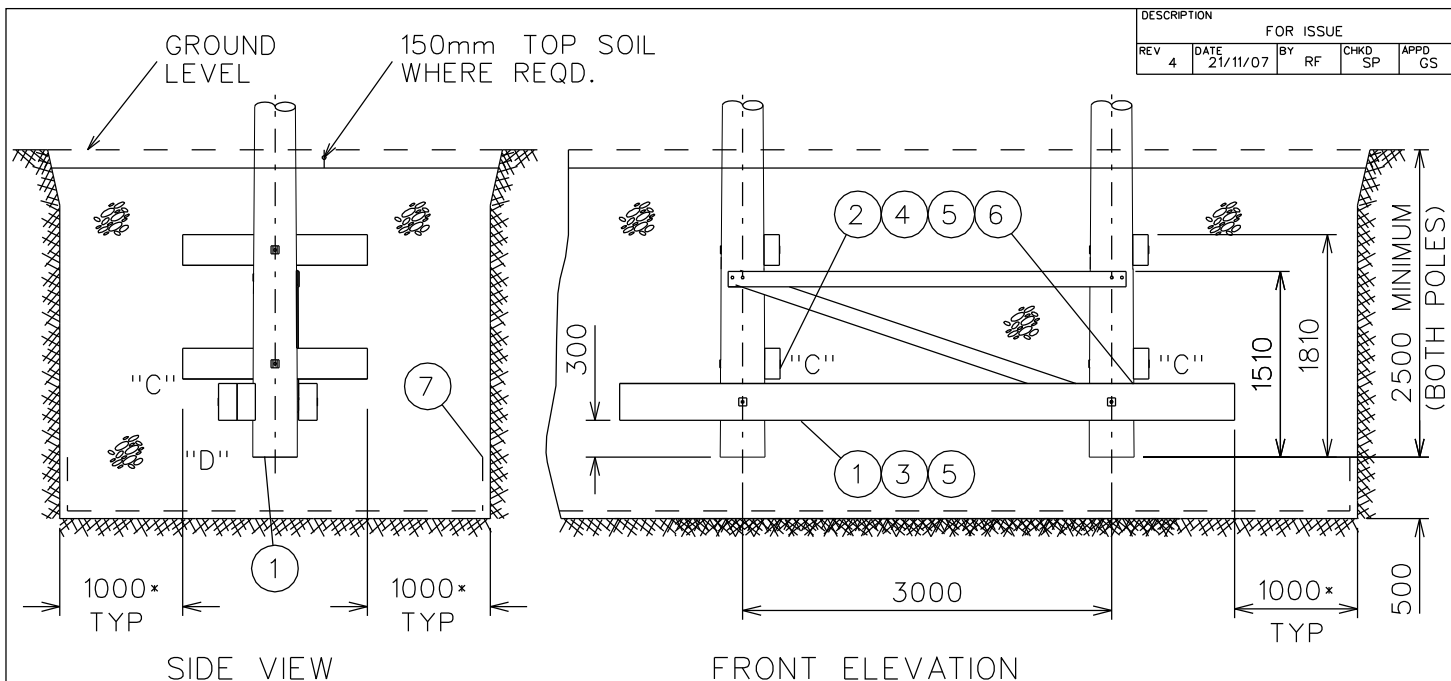

* MINIMUM DISTANCE BETWEEN FACE OF
EXCAVATION & STRUCTURE TO ALLOW
ACCESS TO PLACE GRANULAR FILL & COMPACT

ITEM	DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1	"H" Pole Timber Baulk	LSTC/STD/PAR/738	1	192.5	Timber Baulk "D" in addition to LSTC/STD/GNA/514
2	Foundation Block	LSTC/STD/PAR/602	2	40	Foundation Block "C" in addition to LSTC/STD/GNA/514
3	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.0	M20 Bolts to attach additional Timber Baulk "D" to Foundation
4	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	0.5	M20 Bolts to attach additional Foundation Block
5	Square Flat Washer	LSTC/STD/PAR/619	4	0.1	Flat Washers in addition to LSTC/STD/GNA/514
6	Square Curved Washer	LSTC/STD/PAR/620	2	0.1	Curved Washers in addition to LSTC/STD/GNA/514
7	Geotextile Membrane	--	1	--	Place in Bottom of Excavation Prior to Granular Backfill

Total Additional Calculated Weight = 279Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "VERY POOR" SOIL CONDITIONS ARE ENCOUNTERED.
THESE FOUNDATIONS TO BE INSTALLED IN LEVEL GROUND ONLY.
TO BE READ IN CONJUNCTION WITH:
LSTC/STD/GNA/514: 0° SECTION UPTO 120M
LSTC/STD/GNA/516: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.



CLIENT	TITLE	SCALE	ORIGINAL SIZE	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
PowerSystems	ADDITIONAL MATERIAL -	1:60	A4	
SPECIFICATION	0° SECTION UPTO 120M	(UNLESS OTHERWISE STATED)		
OHL-03-132	VERY POOR SOIL CONDITIONS	DATE	CHECKED	
		16/05/05	GS	
		DRAWN	APPROVED	
		R.F.	PP	
		DRAWING NUMBER	REV	
		LSTC/STD/GNA/802	4	