



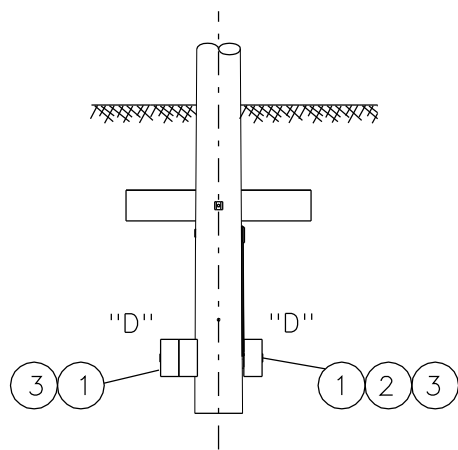

SIDE VIEW: 14M POLES

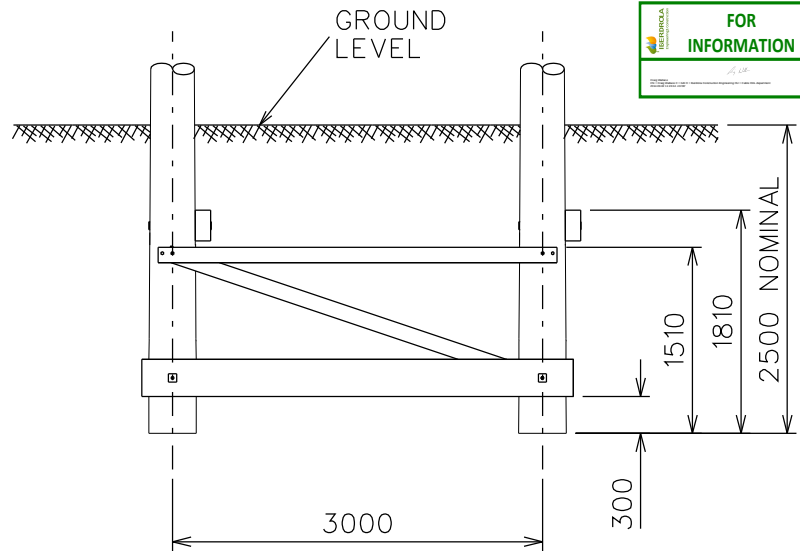

14M POLE FRONT ELEVATION

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1	Timber Baulk	LSTC/STD/PAR/601	2	135	Timber Baulk "D" in addition to LSTC/STD/GNA/546 & 547
2	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.0	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3	Square Flat Washer	LSTC/STD/PAR/619	2	0.1	
Total Additional Calculated Weight = 85Kg					

GENERAL NOTES:

1. ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
2. ALL DIMENSIONS ARE IN MILLIMETRES.
3. MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "POOR" SOIL CONDITIONS ARE ENCOUNTERED. NOTE ONLY THE 14M POLES REQUIRE FOUNDATION BLOCKS & TIMBER BAULKS. FOUNDATIONS TO BE INSTALLED IN LEVEL GROUND ONLY.

READ IN CONJUNCTION WITH:

LSTC/STD/GNA/545, 546 & 547: 4 POLE TERMINAL

LSTC/STD/GNA/548: MATERIAL LIST

LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION

4. IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.

SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.

SHT 3 : FACTORS OF SAFETY.

SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT PowerSystems	TITLE ADDITIONAL MATERIAL - 4 POLE TERMINAL POOR SOIL CONDITIONS	SCALE 1:60 (UNLESS OTHERWISE STATED)	ORIGINAL SIZE A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
		DATE 16/05/05	CHECKED GS	
DRAWN R.F.		APPROVED PP		
DRAWING NUMBER LSTC/STD/GNA/813		REV 3		
SPECIFICATION OHL-03-132				