


DRAWING ISSUE SHEET



[illegible]

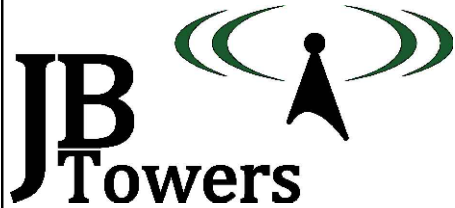

02	FOUNDATION TYPE CHANGED			AM	18/07/18
01	FIRST ISSUE			AM	03/07/18
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AM	CHECKED	MP
WHEN PRINTED AT A3		DATE	03/07/18	DATE	03/07/18
		APPROVED	JBT	DATE	03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE
CLACHAN
GENERAL ARRANGEMENT
SHEET 1 OF 3

SITE ADDRESS CLACHAN TARBERT ARGYLL AND BUTE PA29 6XP		
ARQIVA REF. 140349	DRG No. 200	REV 02

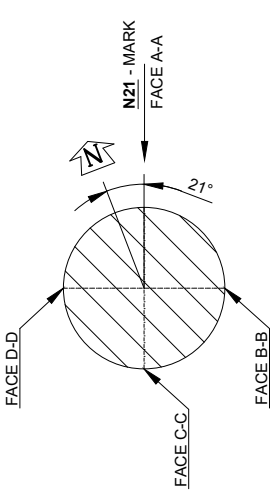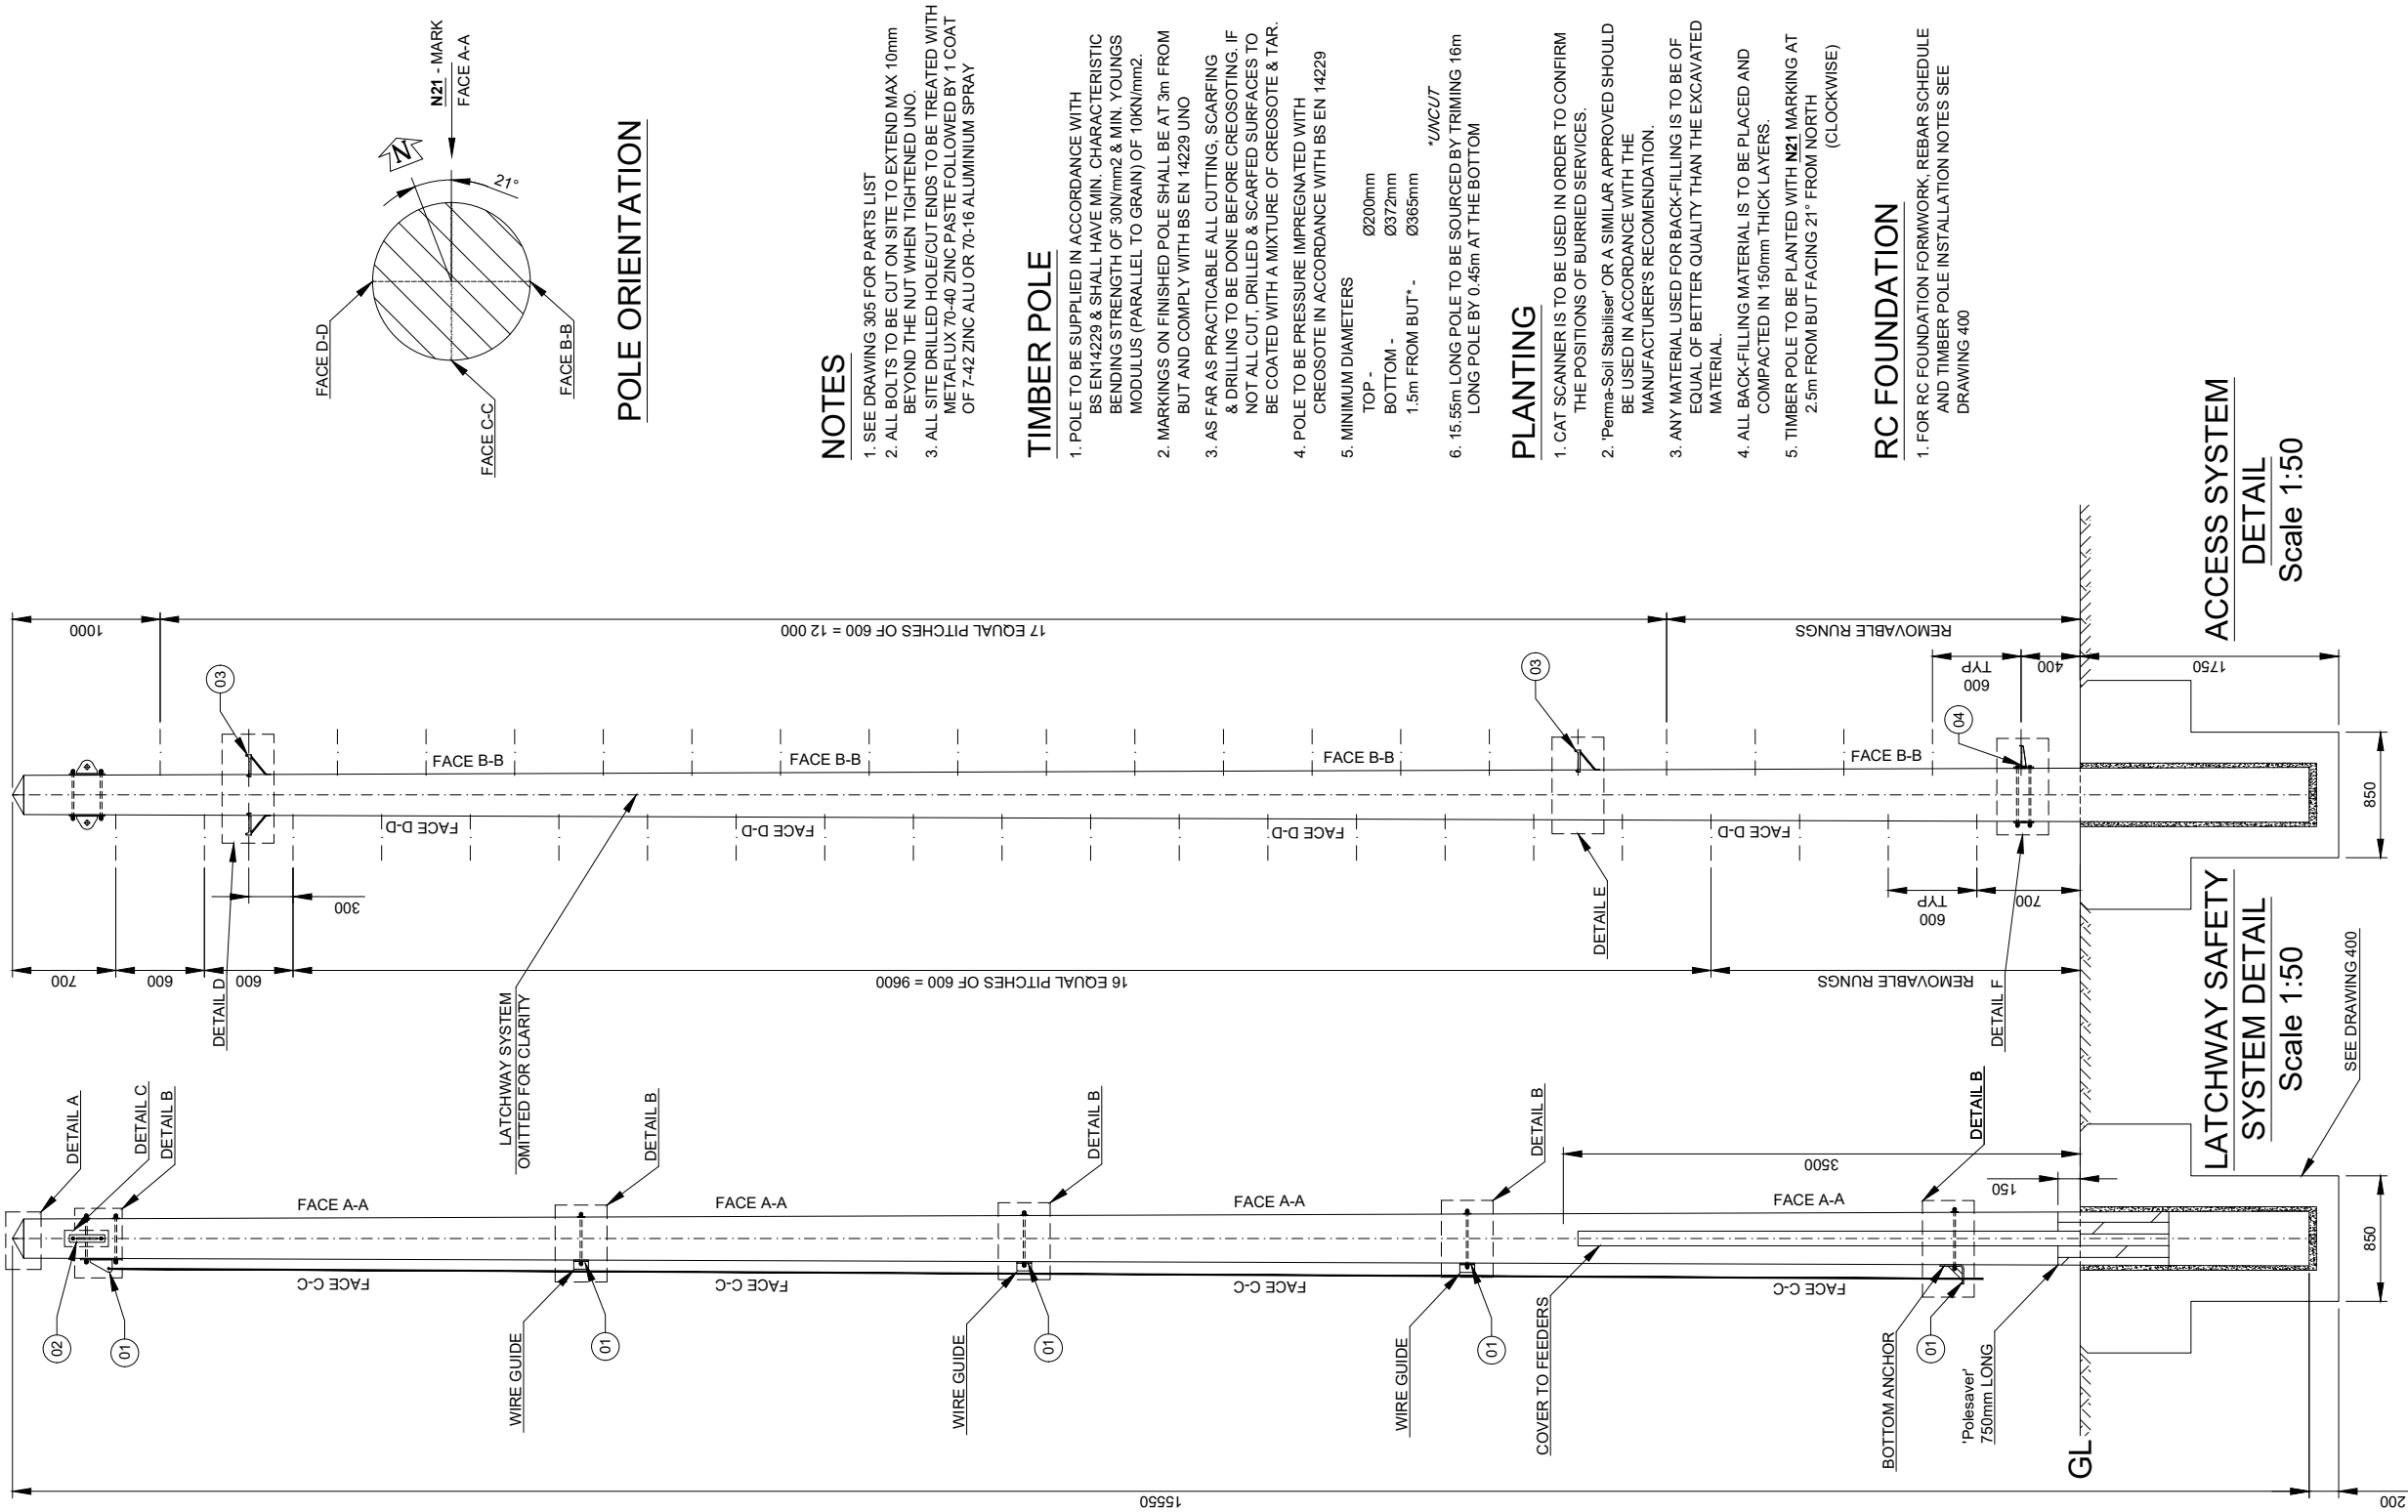

POLE ORIENTATION

NOTES

- SEE DRAWING 305 FOR PARTS LIST
- ALL BOLTS TO BE CUT ON SITE TO EXTEND MAX 10mm BEYOND THE NUT WHEN TIGHTENED UNO.
- ALL SITE DRILLED HOLE/CUT ENDS TO BE TREATED WITH METALUX 70-40 ZINC PASTE FOLLOWED BY 1 COAT OF 7-42 ZINC ALU OR 70-16 ALUMINIUM SPRAY

TIMBER POLE

- POLE TO BE SUPPLIED IN ACCORDANCE WITH BS EN 14229 & SHALL HAVE MIN. CHARACTERISTIC BENDING STRENGTH OF 30N/mm² & MIN. YOUNGS MODULUS (PARALLEL TO GRAIN) OF 10KN/mm².
- MARKINGS ON FINISHED POLE SHALL BE AT 3m FROM BUT AND COMPLY WITH BS EN 14229 UNO
- AS FAR AS PRACTICABLE ALL CUTTING, SCARFING & DRILLING TO BE DONE BEFORE CREOSOTING. IF NOT ALL CUT, DRILLED & SCARFED SURFACES TO BE COATED WITH A MIXTURE OF CREOSOTE & TAR.
- POLE TO BE PRESSURE IMPREGNATED WITH CREOSOTE IN ACCORDANCE WITH BS EN 14229
- MINIMUM DIAMETERS
TOP - Ø200mm
BOTTOM - Ø372mm
1.5m FROM BUT* - Ø365mm
**UNCUT*
- 15.55m LONG POLE TO BE SOURCED BY TRIMMING 16m LONG POLE BY 0.45m AT THE BOTTOM

PLANTING

- CAT SCANNER IS TO BE USED IN ORDER TO CONFIRM THE POSITIONS OF BURIED SERVICES.
- 'Perma-Soil Stabiliser' OR A SIMILAR APPROVED SHOULD BE USED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATION.
- ANY MATERIAL USED FOR BACK-FILLING IS TO BE OF EQUAL OF BETTER QUALITY THAN THE EXCAVATED MATERIAL.
- ALL BACK-FILLING MATERIAL IS TO BE PLACED AND COMPACTED IN 150mm THICK LAYERS.
- TIMBER POLE TO BE PLANTED WITH N21 MARKING AT 2.5m FROM BUT FACING 21° FROM NORTH (CLOCKWISE)



RC FOUNDATION

- FOR RC FOUNDATION FORMWORK, REBAR SCHEDULE AND TIMBER POLE INSTALLATION NOTES SEE DRAWING 400



ALL SCALES AS SHOWN WHEN PRINTED AT A3

ALL SCALES AS SHOWN WHEN PRINTED AT A3

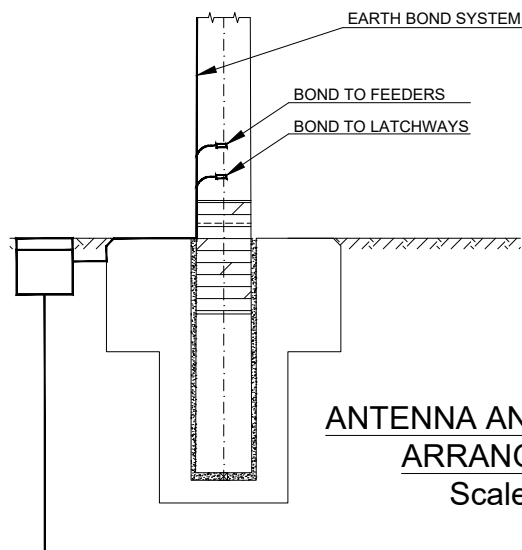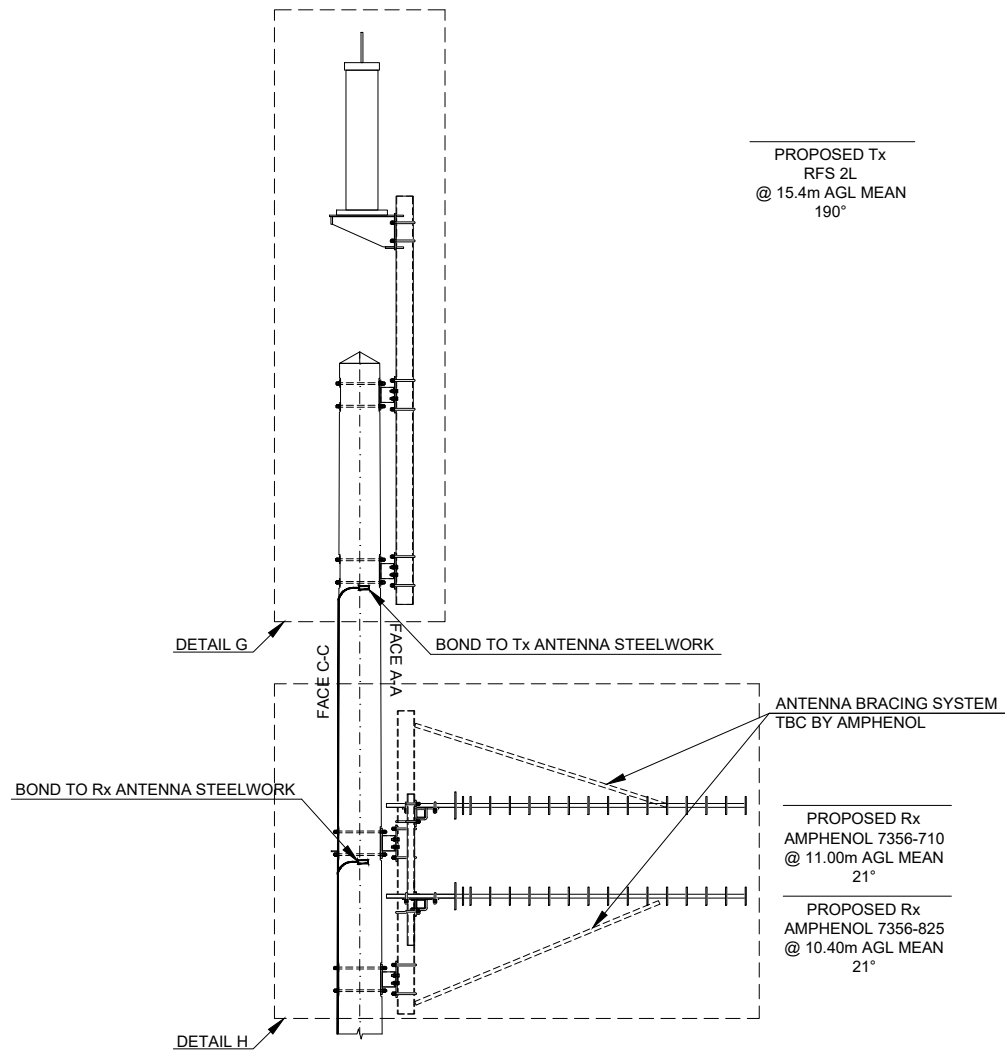

ANTENNA AND EARTHING
ARRANGEMENT
Scale 1:50

NOTES


1. AS FAR AS IS PRACTICABLE ALL CUTTING SCARFING AND DRILLING TO BE DONE BEFORE CREOSOTING. WHERE THIS IS NOT POSSIBLE ALL CUT, DRILLED, AND SCARFED SURFACES TO BE COATED WITH A MIXTURE OF CREOSOTE AND TAR

FEEDERS


1. SUPPLY OF FEEDERS BY OTHERS
LCF78-50 TO Tx ANTENNA &
LCF12-50 TO Rx ANTENNA
2. FEEDERS FIXED AT 1000mm CENTRES

EARTHING

1. CONNECT EARTH BOND TO NEW EARTHING SYSTEM
2. MAXIMUM VALUE FOR GROUND RESISTANCE TO BE 10 OHMS
3. CABLE OR TAPE TO BE FIXED TO POLE AT 1000mm CENTRES
4. EARTHING SHOULD COMPLY WITH ARQIVA'S DOCUMENT BOS147
5. THE POSITION OF THE EARTH BOND SYSTEM ALONG THE HEIGHT OF THE POLE IS TO BE DETERMINED ON SITE

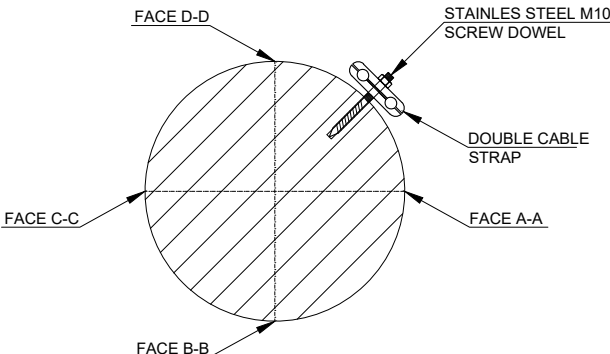

FEEDER
MANAGEMENT
Scale 1:10

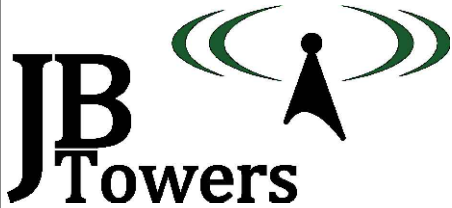

02	FEEDER POSITION CHANGED	AM	18/07/18
01	FIRST ISSUE	AM	03/07/18
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/07/18	CHECKED DATE 03/07/18	APPROVED DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
CLACHAN
GENERAL ARRANGEMENT
SHEET 2 OF 3

SITE ADDRESS
CLACHAN
TARBERT
ARGYLL AND BUTE
PA29 6XP

ARQIVA REF.
140349


DRG No.
200

REV
02

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3




NOTES:
1. A SINGLE COAT OF TIMBER COMPATIBLE BITUMINOUS PAINT (E.G. BIRD BRAND BLACK BITUMINOUS PAINT OR SIMILAR APPROVED PRODUCT) TO BE APPLIED TO THE UPPER SURFACES AT THE TOP OF THE POLE.
2. PAINT TO BE APPLIED ON SITE JUST BEFORE ERECTION
FORM: 4 WAY PYRAMID / CONE


DETAIL A - TIMBER POLE TOP
Scale 1:20

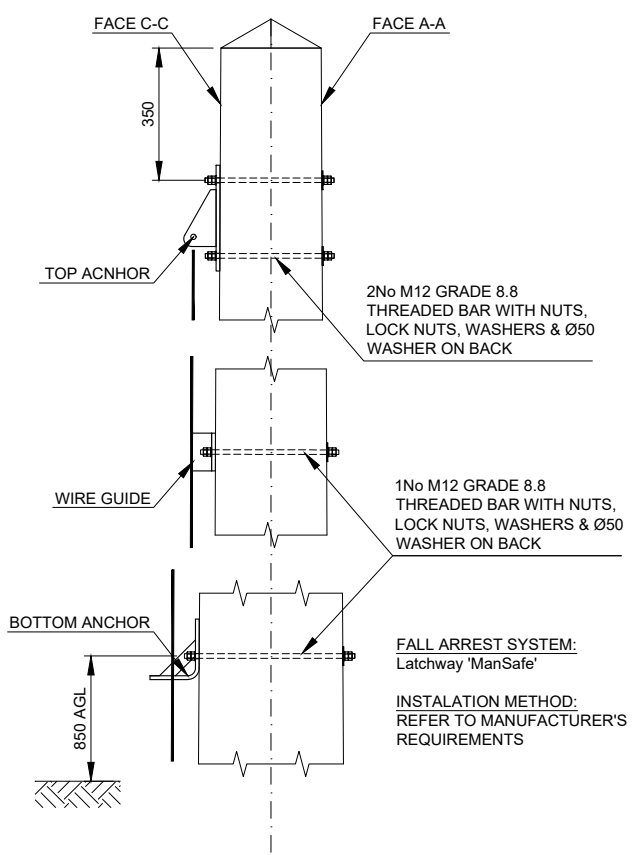


DETAIL B - FALL ARREST SYSTEM
Scale 1:20

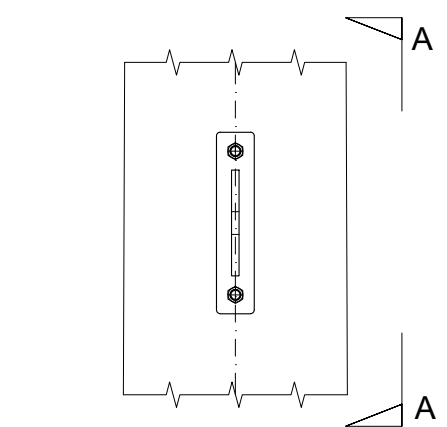

DETAIL C - FALL ARREST ATTACHMENT POINT
Scale 1:10

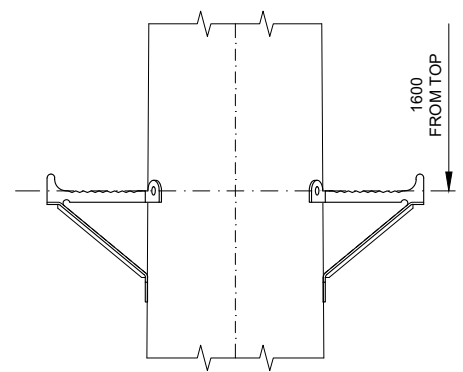


DETAIL D - ANTENNA ACCESS CLIMBING STEP
Scale 1:10

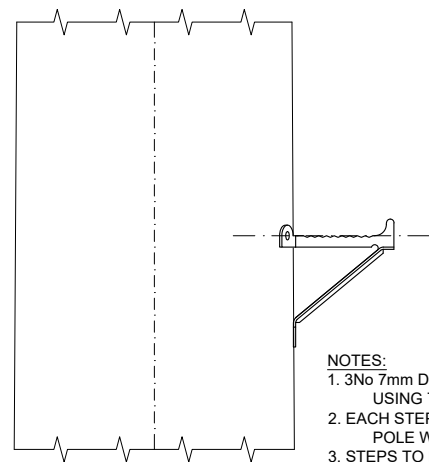


DETAIL E - PERMANENT CLIMBING STEPS
Scale 1:10


NOTES:
1. 3No 7mm DIA 70mm LONG PILOT HOLES TO BE DRILLED USING THE STEP AS A TEMPLATE
2. EACH STEP SHOULD BE FIXED TO THE TIMBER POLE WITH 3No 10mm COACH SCREWS 75mm LONG
3. STEPS TO BE INSTALLED ON FACES B-B & D-D ONLY

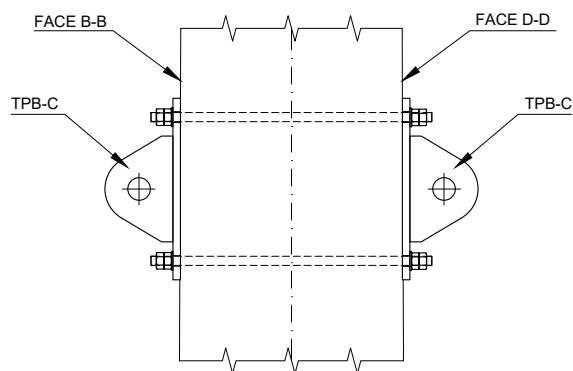

VIEW A-A
Scale 1:10

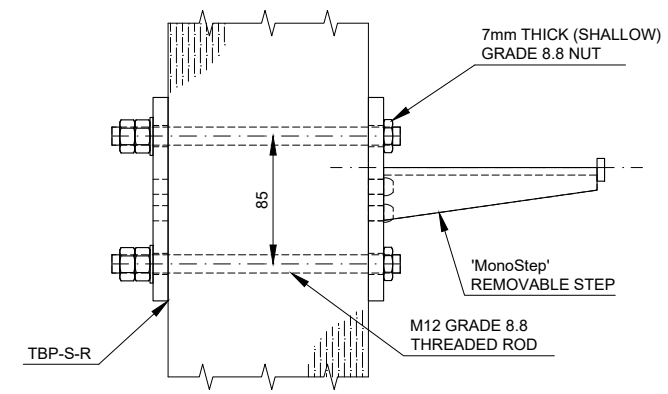

DETAIL F - REMOVABLE CLIMBING STEPS
Scale 1:5

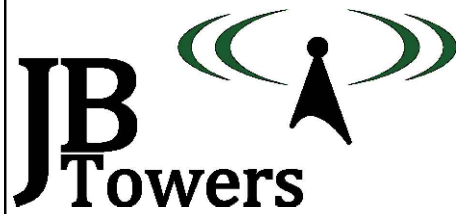


03	DETAIL F UPDATED	AM	26/07/18
02	DETAILS C & F UPDATED	AM	18/07/18
01	FIRST ISSUE	AM	03/07/18
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN AM	CHECKED MP	APPROVED JBT
DATE 03/07/18	DATE 03/07/18	DATE 03/07/18	DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
CLACHAN
GENERAL ARRANGEMENT
SHEET 3 OF 3

SITE ADDRESS CLACHAN TARBERT ARGYLL AND BUTE PA29 6XP		
ARQIVA REF. 140349	DRG No. 200	REV 03

ALL SCALES AS SHOWN WHEN PRINTED AT A3

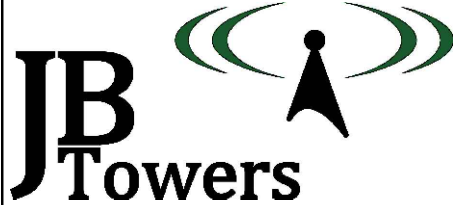

03	DETAIL 3 UPDATED	AM	26/07/18		
02	DETAIL 3 UPDATED	AM	18/07/18		
01	FIRST ISSUE	AM	03/07/18		
REV	REV	BY	DATE		
SCALE AS SHOWN		DRAWN	AM	CHECKED	MP
WHEN PRINTED AT A3		DATE	03/07/18	DATE	03/07/18
		APPROVED	JBT	DATE	03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					








TITLE
CLACHAN
TIMBER POLE HOLE SET OUT
SHEET 1 OF 2

SITE ADDRESS
CLACHAN
TARBERT
ARGYLL AND BUTE
PA29 6XP

ARQIVA REF.
140349


DRG No.
201

REV
03

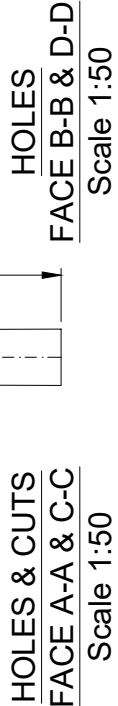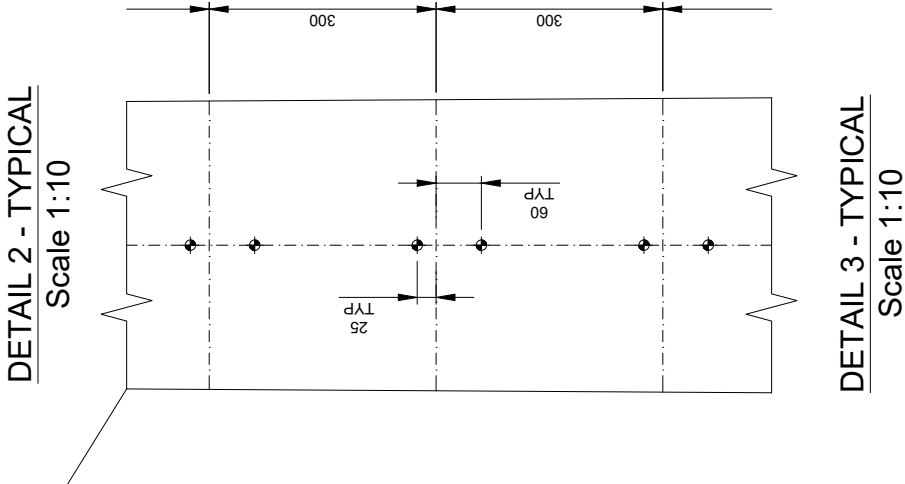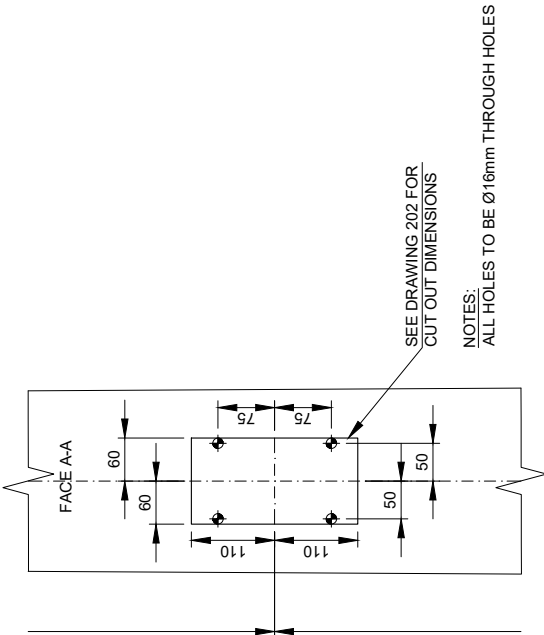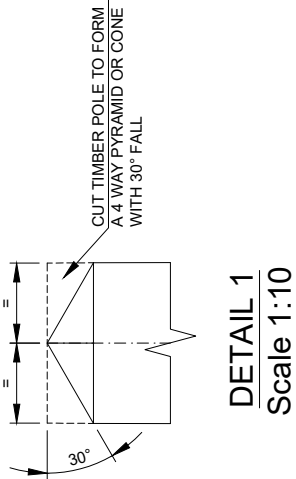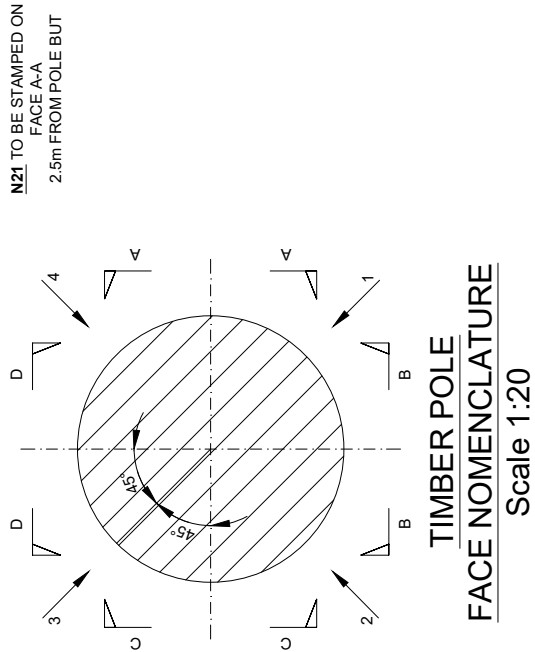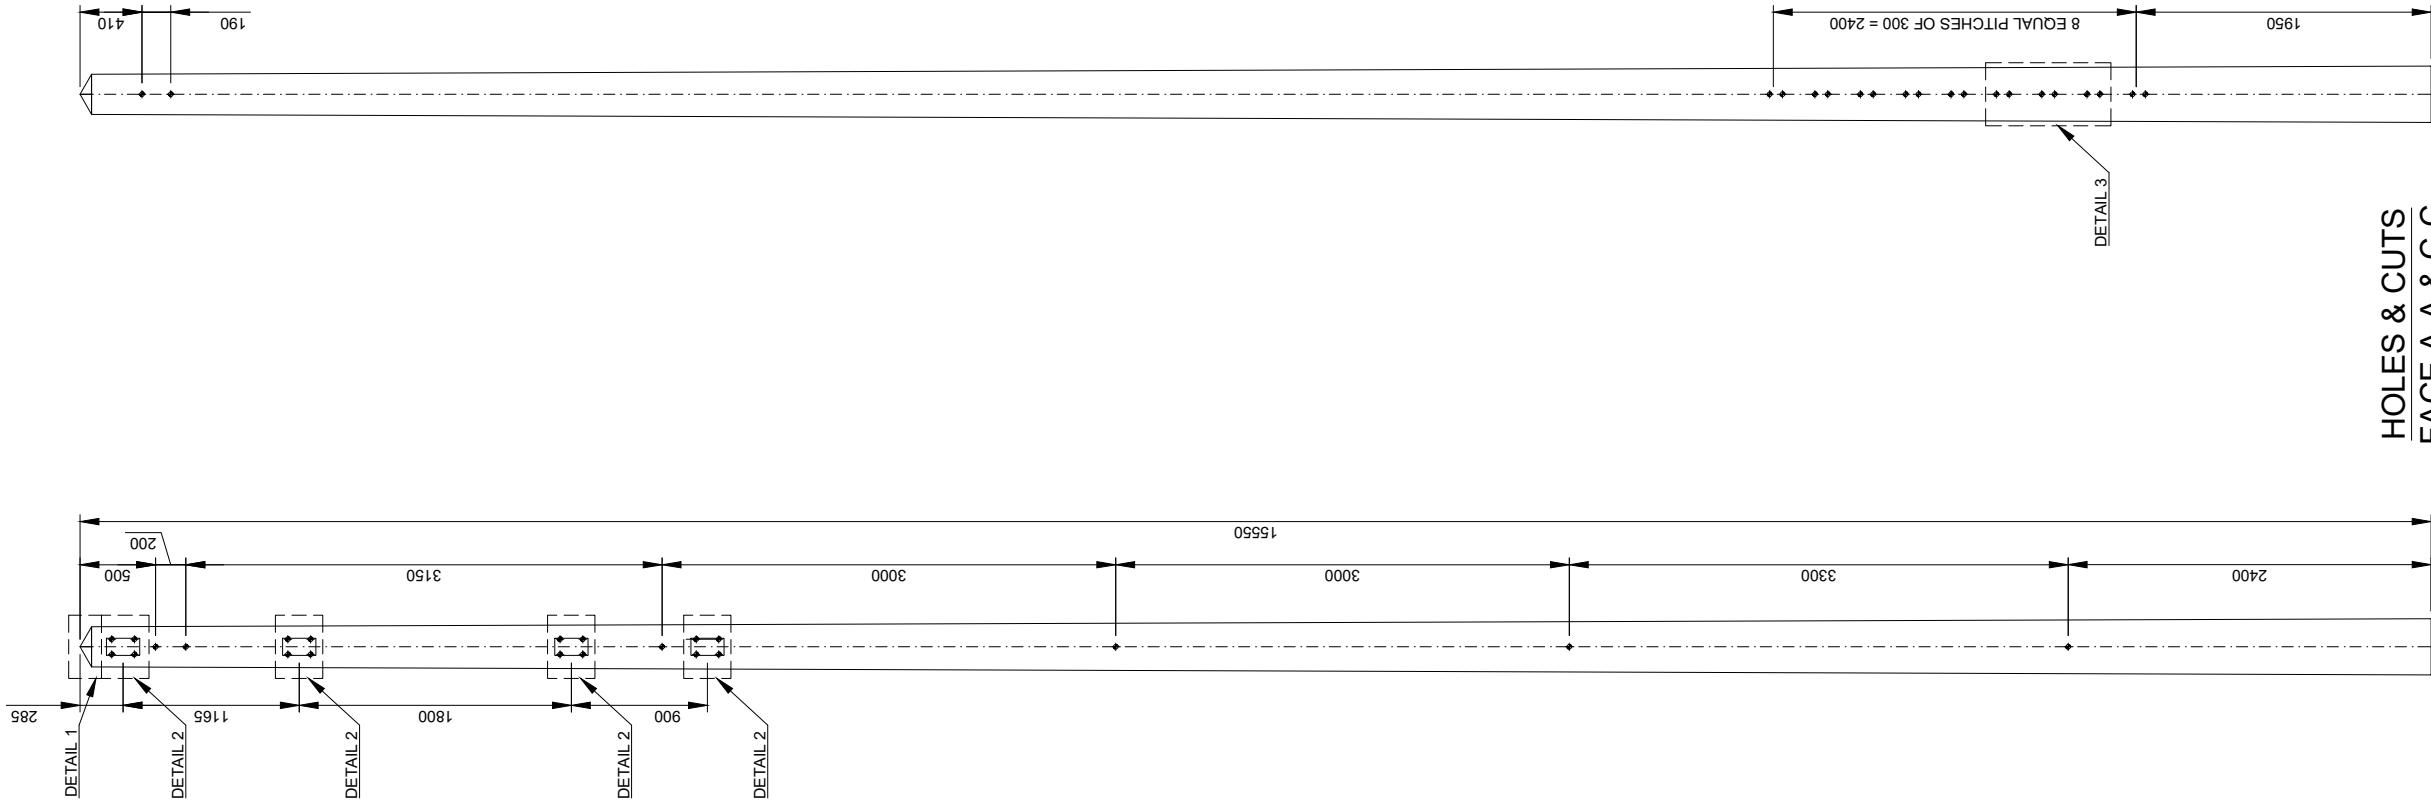

ALL SCALES AS SHOWN WHEN PRINTED AT A3

ALL SCALES AS SHOWN WHEN PRINTED AT A3

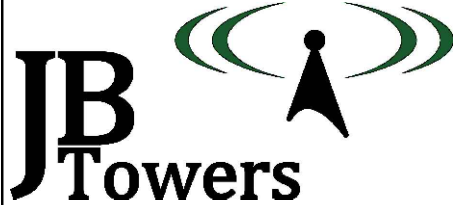

02	POSITION OF PILOT HOLES CHANGED			AM	18/07/18
01	FIRST ISSUE			AM	03/07/18
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AM	CHECKED	MP
WHEN PRINTED AT A3		DATE	03/07/18	DATE	03/07/18
		APPROVED	JBT	DATE	03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					



TITLE
CLACHAN
TIMBER POLE HOLE SET OUT
SHEET 2 OF 2

SITE ADDRESS
CLACHAN
TARBERT
ARGYLL AND BUTE
PA29 6XP

ARQIVA REF.
140349

DRG No.
201

REV
02

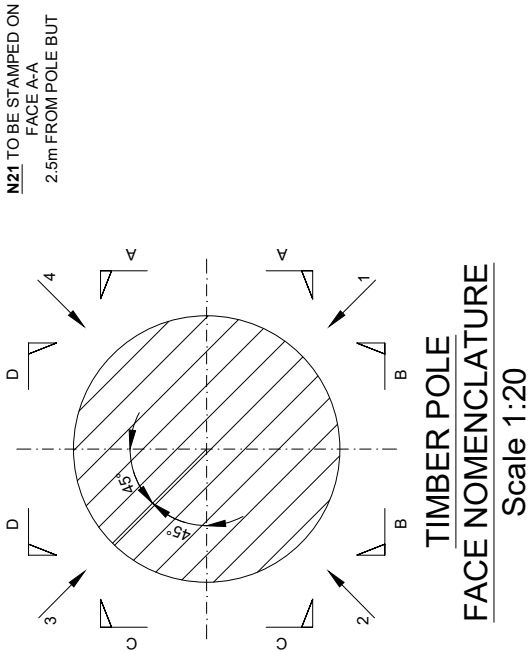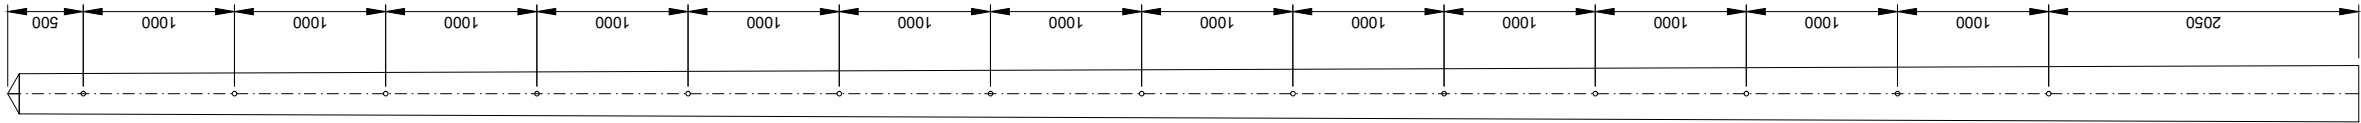


ALL HOLES ON ARROW 4
TO BE Ø8mm & 70mm LONG

HOLES
ARROW 4
Scale 1:50



ALL SCALES AS SHOWN WHEN PRINTED AT A3

ALL SCALES AS SHOWN WHEN PRINTED AT A3

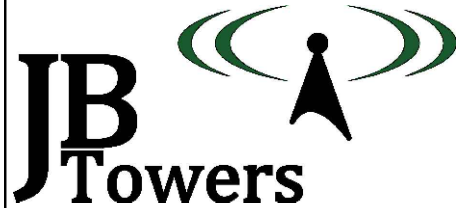


01	FIRST ISSUE					AM	03/07/18
REV	REV					BY	DATE
SCALE AS SHOWN		DRAWN	AM	CHECKED	MP	APPROVED	JBT
WHEN PRINTED AT A3		DATE	03/07/18	DATE	03/07/18	DATE	03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.							

TITLE
CLACHAN
TIMBER POLE CUT OUT
DETAIL

SITE ADDRESS CLACHAN TARBERT ARGYLL AND BUTE PA29 6XP		
ARQIVA REF. 140349	DRG No. 202	REV 01


TIMBER POLE CUT OUT
DETAIL

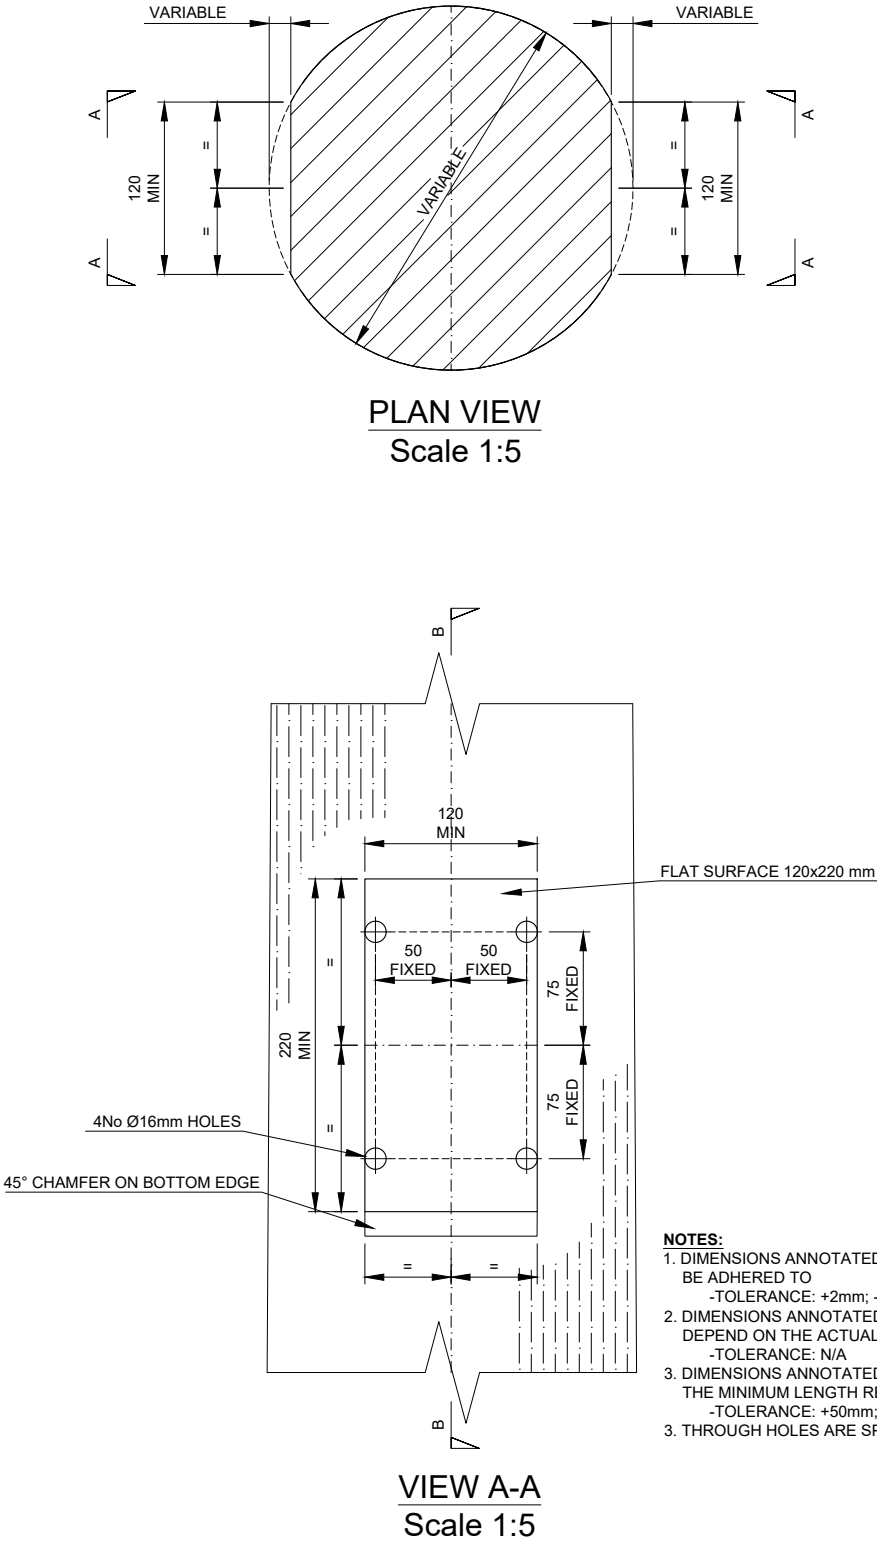


ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

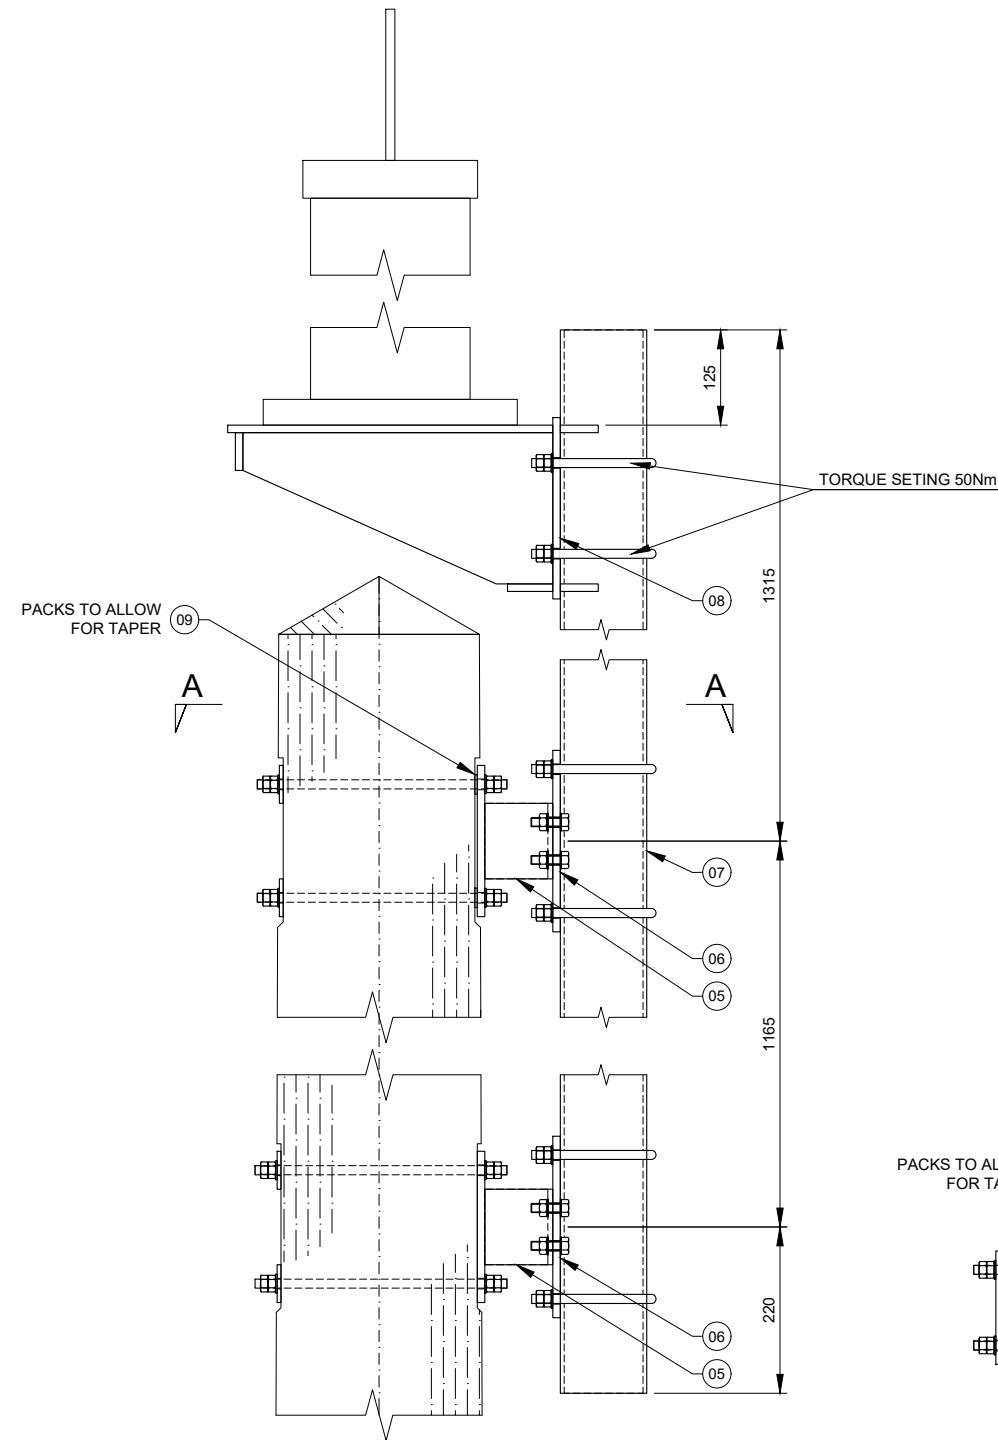

DETAIL G - Tx ANTENNA MOUNT
Scale 1:10

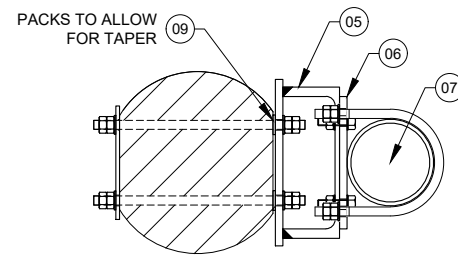


SECTION A-A
Scale 1:10

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

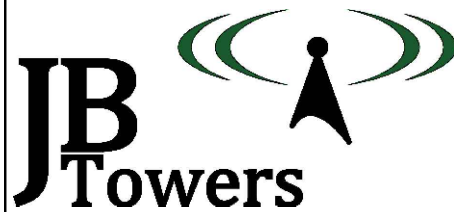

01	FIRST ISSUE			AM	03/07/18
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN DATE 03/07/18	CHECKED DATE 03/07/18	MP	APPROVED DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					


TITLE
ANTENNA MOUNT
DETAIL G

SITE ADDRESS		
CLACHAN TARBERT ARGYLL AND BUTE		
PA29 6XP		
ARQIVA REF. 140349	DRG No. 203	REV 01

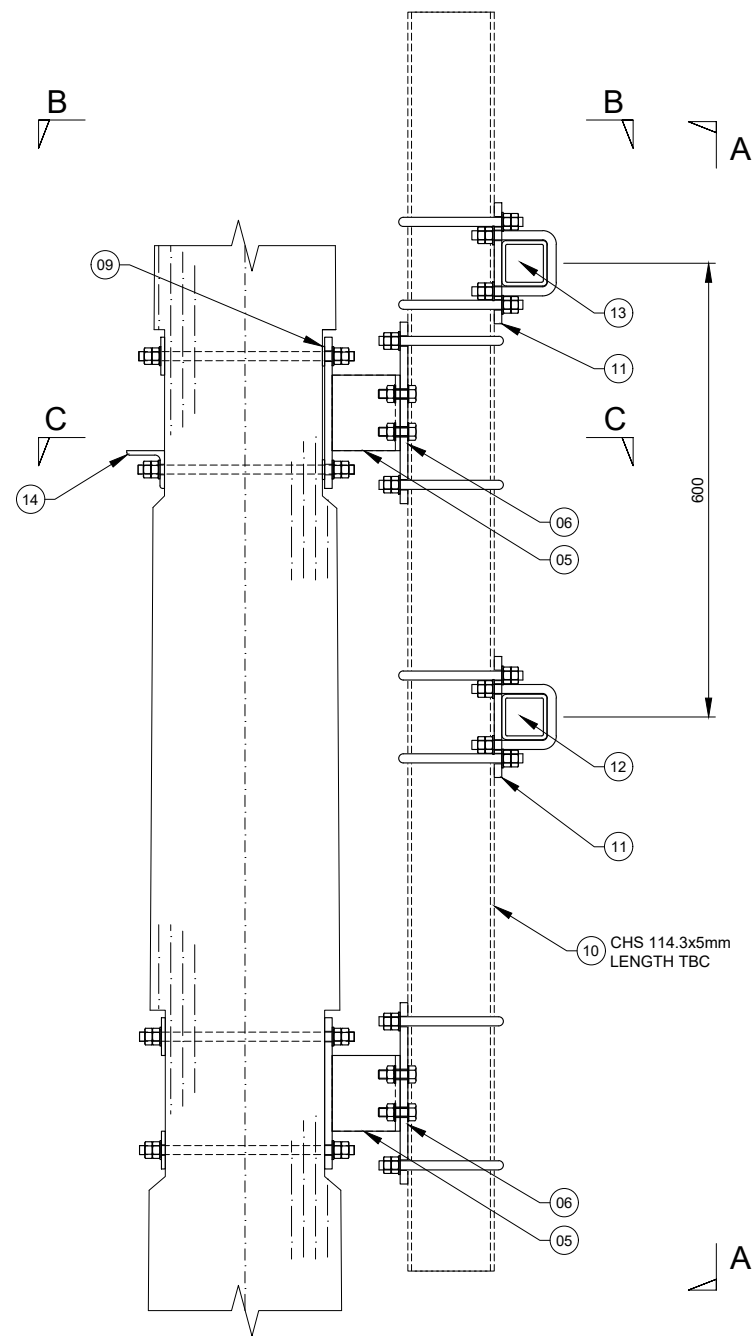

DETAIL H - Rx ANTENNA MOUNT
Scale 1:10

ANTENNAS OMITTED FOR CLARITY

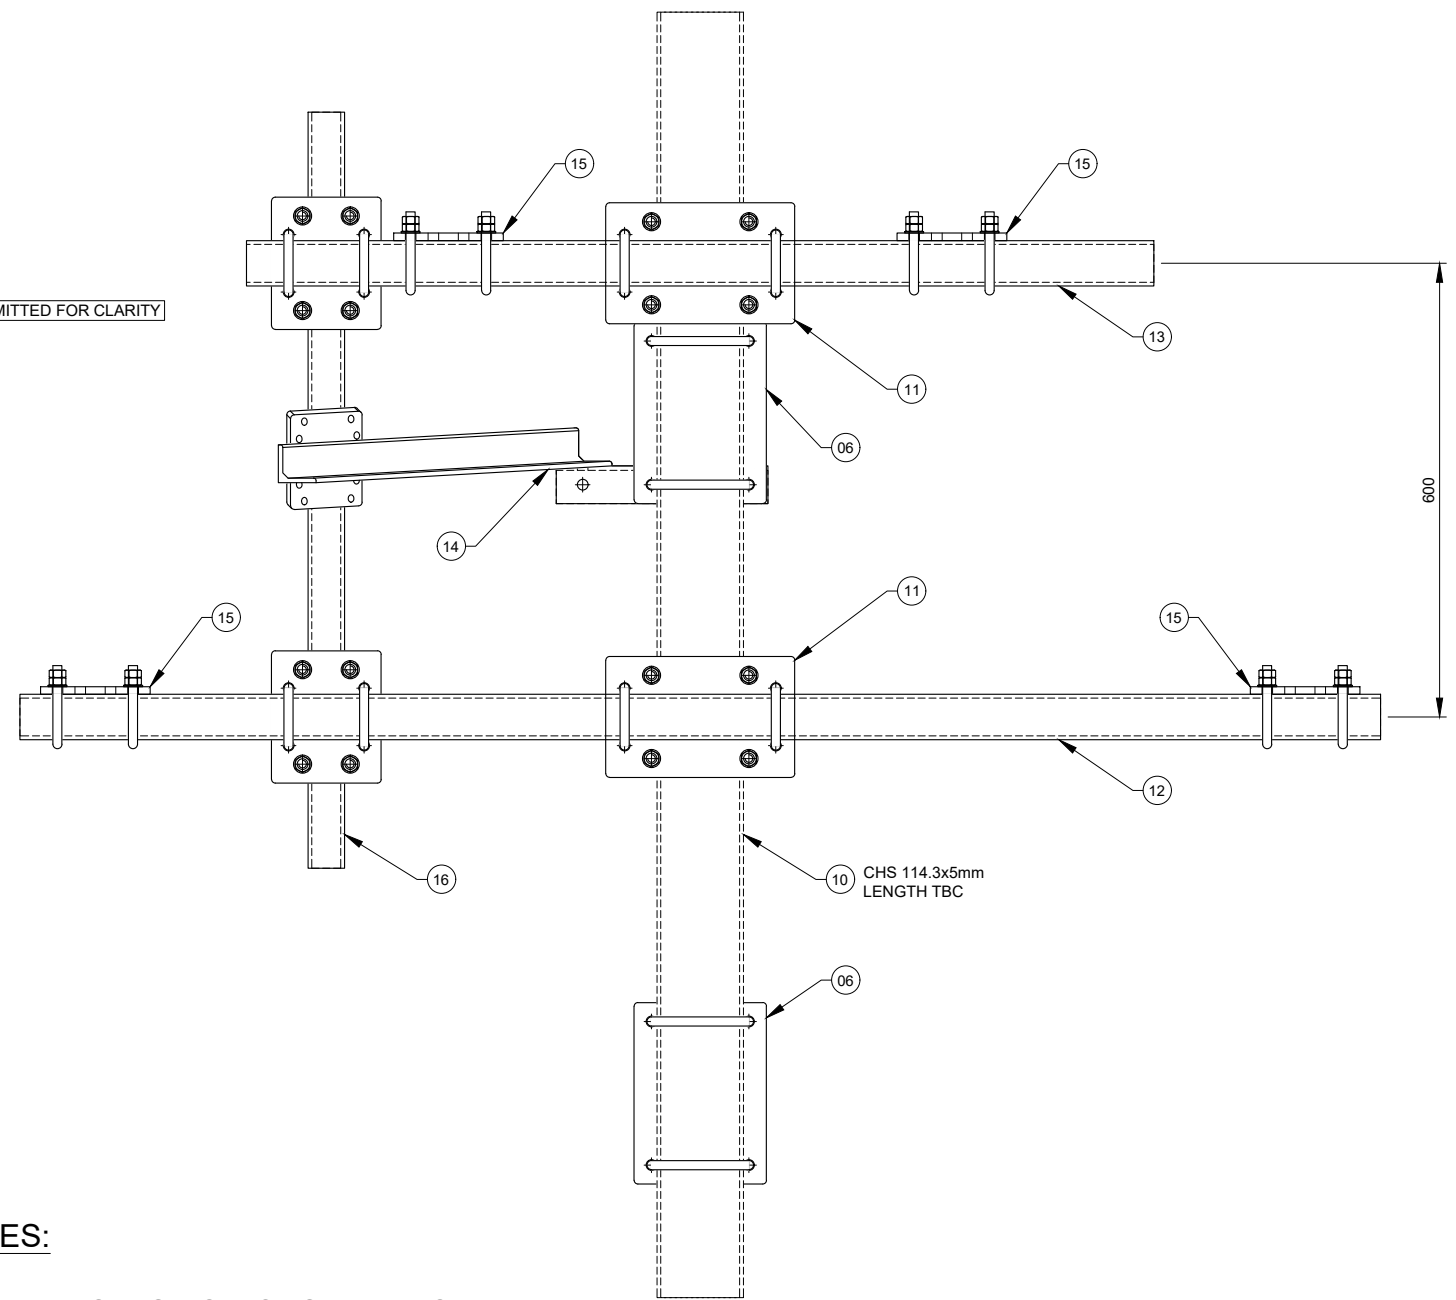

VIEW A-A
Scale 1:10


NOTES:

1. ALL U-BOLTS FOR CHS114.3 TO BE TORQUED TO 50Nm
2. THE LENGTH OF MEMBER 10 WILL BE CONFIRMED BASED ON THE ANTENNA BRACING SYSTEM REQUIREMENT

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

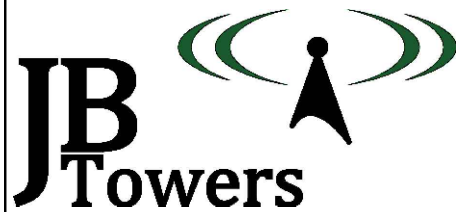

01	FIRST ISSUE				AM	03/07/18
REV	REV				BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN	AM	CHECKED	MP	APPROVED JBT
		DATE	03/07/18	DATE	03/07/18	DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.						

TITLE ANTENNA MOUNTS DETAIL H SHEET 1 OF 2	SITE ADDRESS CLACHAN TARBERT ARGYLL AND BUTE PA29 6XP		
	ARQIVA REF. 140349	DRG No. 204	REV 01

PACKS TO ALLOW
FOR TAPER

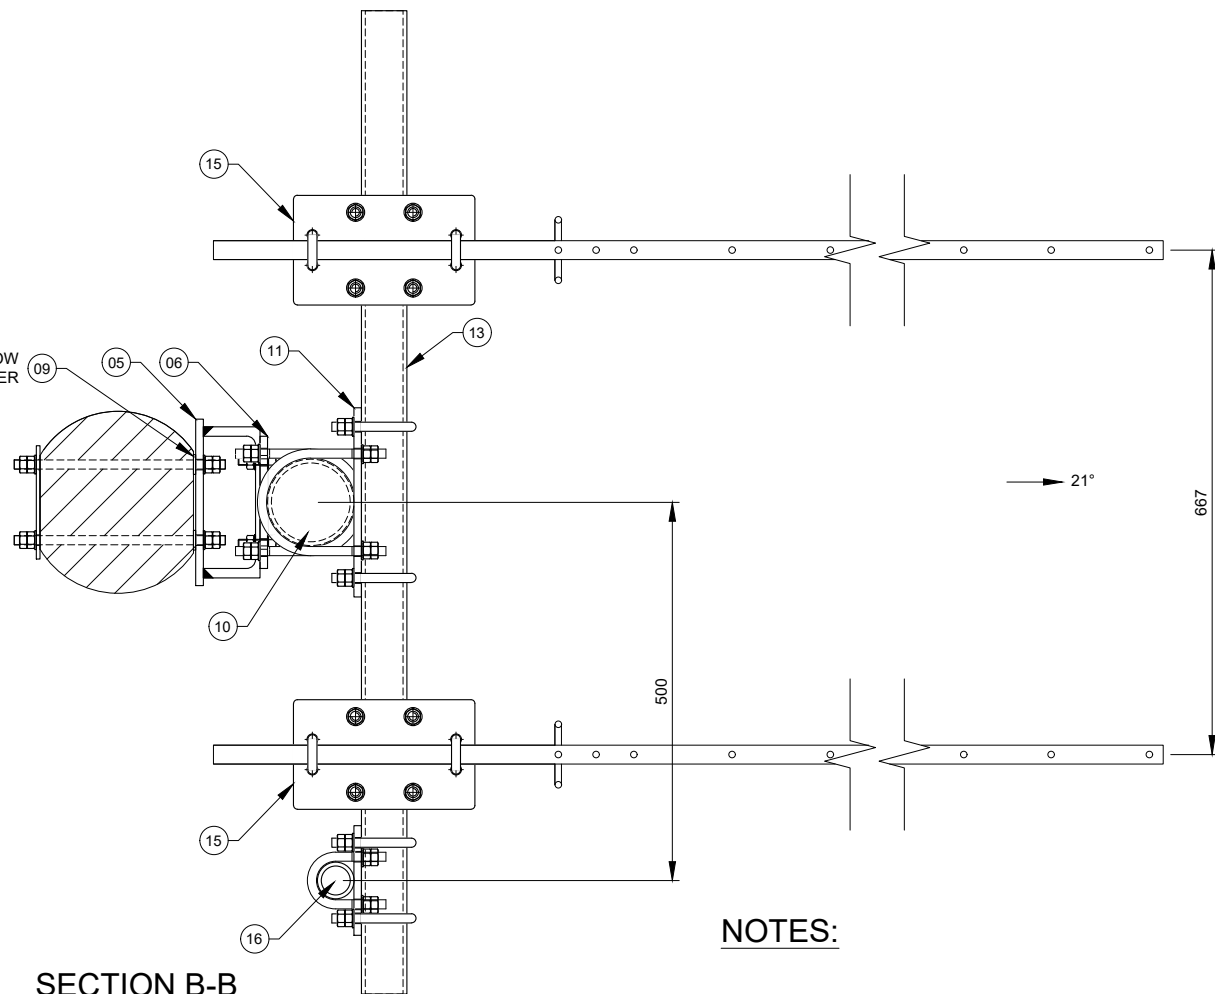


SECTION B-B
Scale 1:10

NOTES:


1. ALL U-BOLTS FOR CHS114.3 TO BE TORQUED TO 50Nm
2. THE LENGTH OF MEMBER 10 WILL BE CONFIRMED BASED ON THE ANTENNA BRACING SYSTEM REQUIREMENT

PACKS TO ALLOW
FOR TAPER

NOTE:
1No PART TPB-B-3 FROM ITEM 05 IS
TO BE SUBSTITUTED WITH 1No PART
TPB-BR-2 FROM ITEM 14

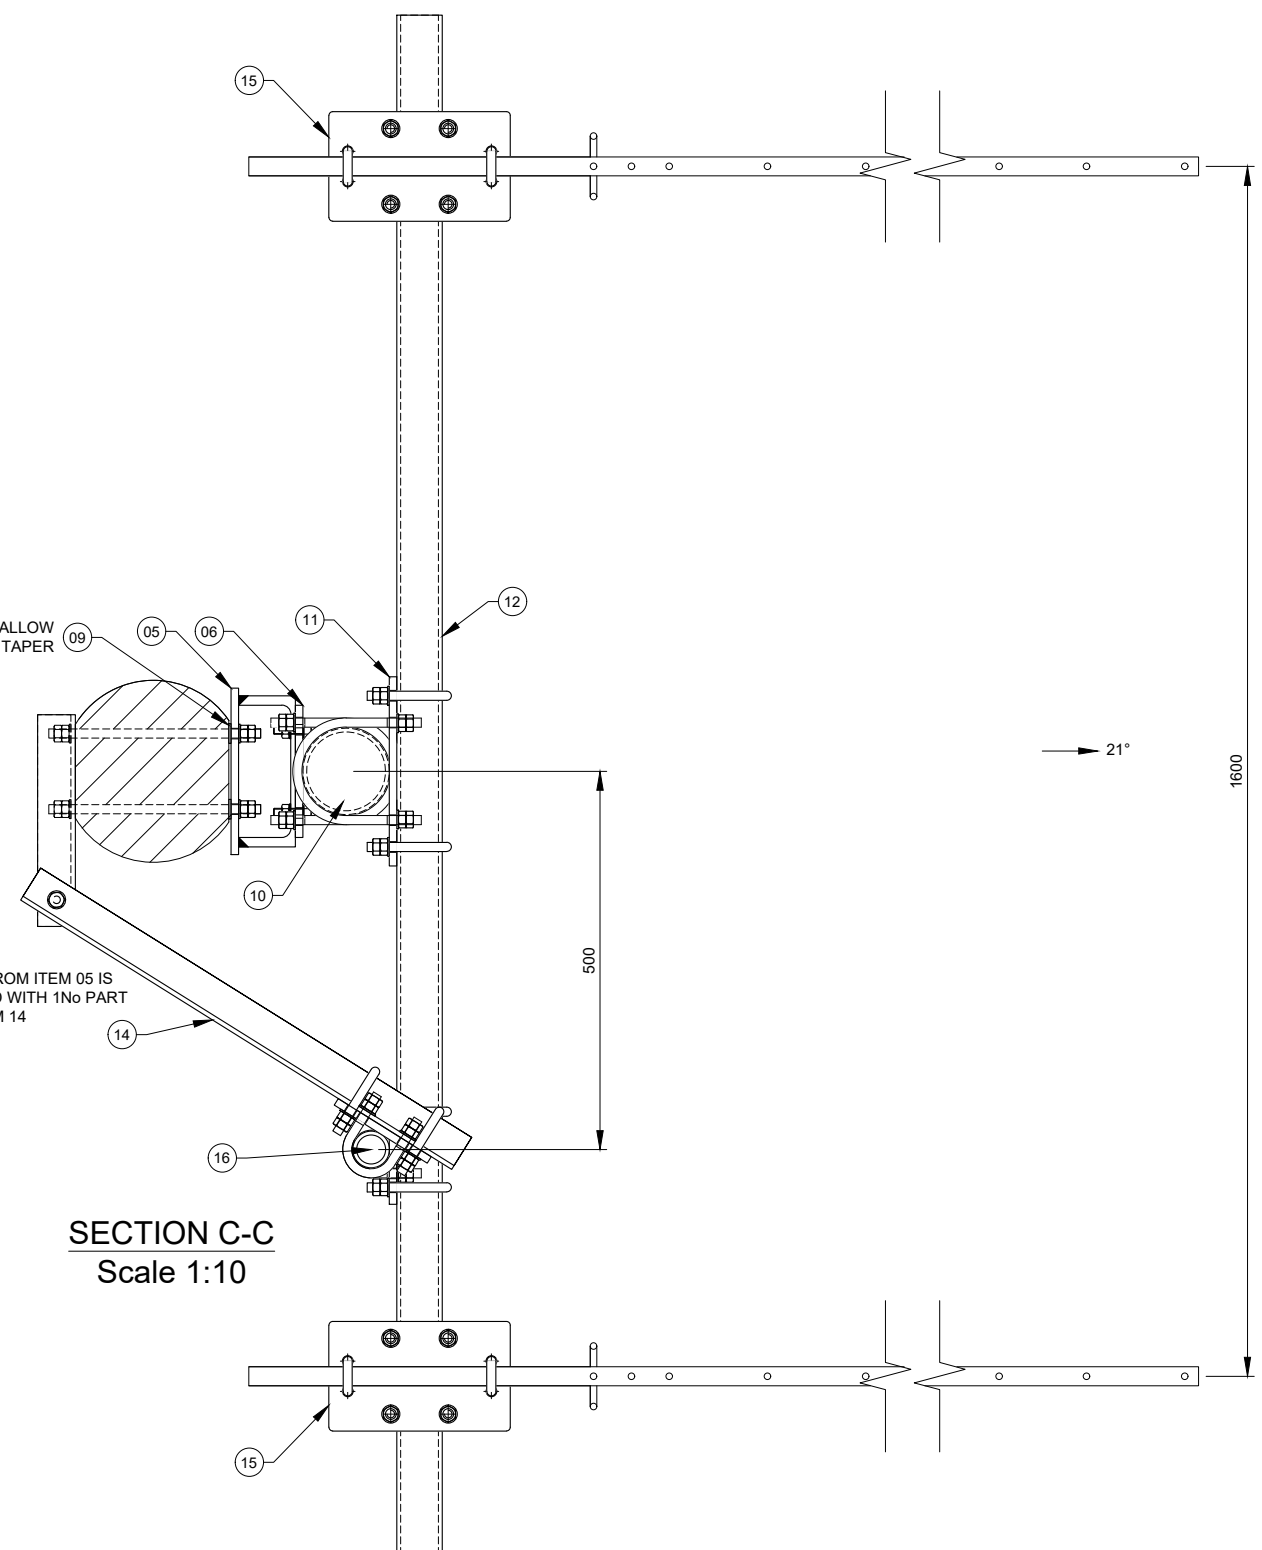

SECTION C-C
Scale 1:10

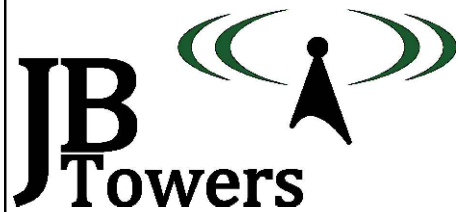

01	FIRST ISSUE	AM	03/07/18
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/07/18	CHECKED DATE 03/07/18	APPROVED DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
ANTENNA MOUNT
DETAIL H
SHEET 2 OF 2


SITE ADDRESS
CLACHAN
TARBERT
ARGYLL AND BUTE
PA29 6XP

ARQIVA REF.
140349
DRG No.
204
REV
01

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

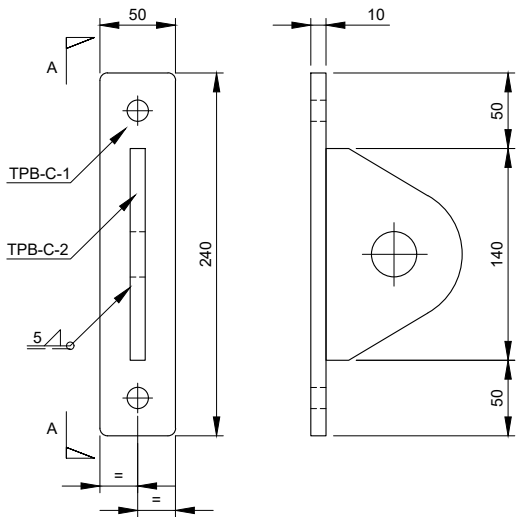


PART TPB-C
Scale 1:5

VIEW A-A
Scale 1:5

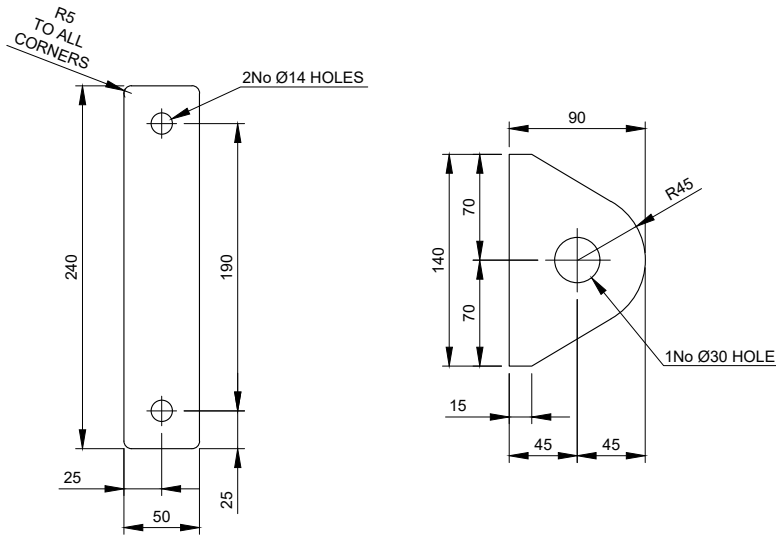

TPB-C-1 - 10mm THICK
Scale 1:5

TPB-C-2 - 10mm THICK
Scale 1:5

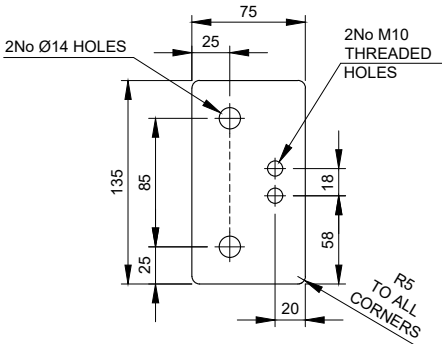

PART TPS-R
Scale 1:5

Parts list for TPB-C


Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-C-1	1	240x50x10mm	N/A	S275J0	0.94 kg
02	TPB-C-2	1	140x90x10mm	N/A	S275J0	0.99 kg
03	STUDS	1	M12 STUDDING	350mm	GRADE 8.8	0.31 kg
Total Weight:						2.24 kg

- All steel hot dip galvanized
- Each STUD to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrtaion notes see drawing 305

Parts list for TPS-R

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPS-R	2	135x75x10mm	N/A	S275J0	0.80 kg
02	STUDS	2	M12 STUDDING	500mm	GRADE 8.8	0.44 kg
03	NUT-S	2	M12 SHALLOW NUT	N/A	GRADE 8.8	-
04	NUT	4	M12 NUT	N/A	GRADE 8.8	-
03	WSH	4	M12 WASHER	N/A	GRADE 8.8	-
Total Weight:						2.48 kg

- All steel hot dip galvanized
- For fabrtaion notes see drawing 305

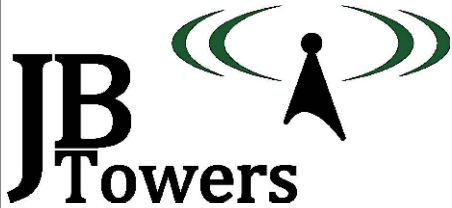

03	PART TPS-R UPDATED	AM	26/07/18
02	PART TPS-R UPDATED	AM	18/07/18
01	FIRST ISSUE	AM	03/07/18
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/07/18	CHECKED DATE 03/07/18	APPROVED DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
ATTACHMENT POINT &
TEMPORARY STEP DETAILS
PARTS: TPB-C; TPS-R






SITE ADDRESS
CLACHAN
TARBERT
ARGYLL AND BUTE
PA29 6XP

ARQIVA REF.
140349
DRG No.
300
REV
03

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

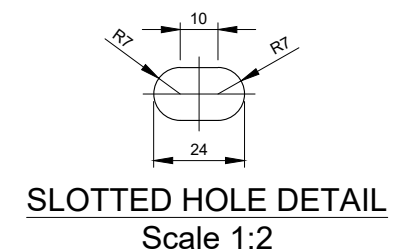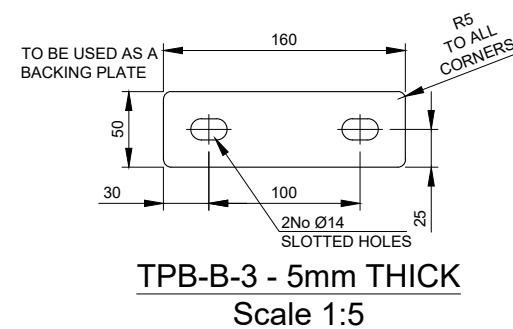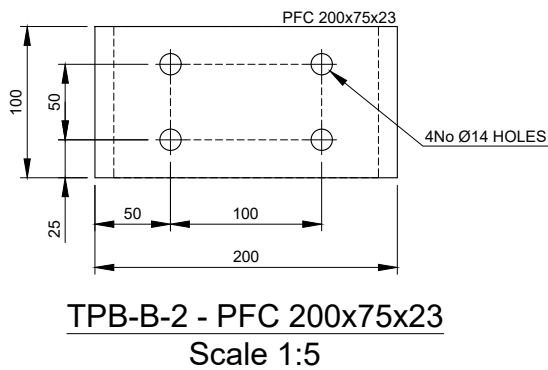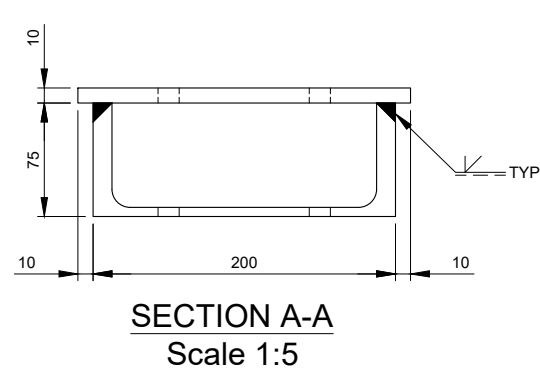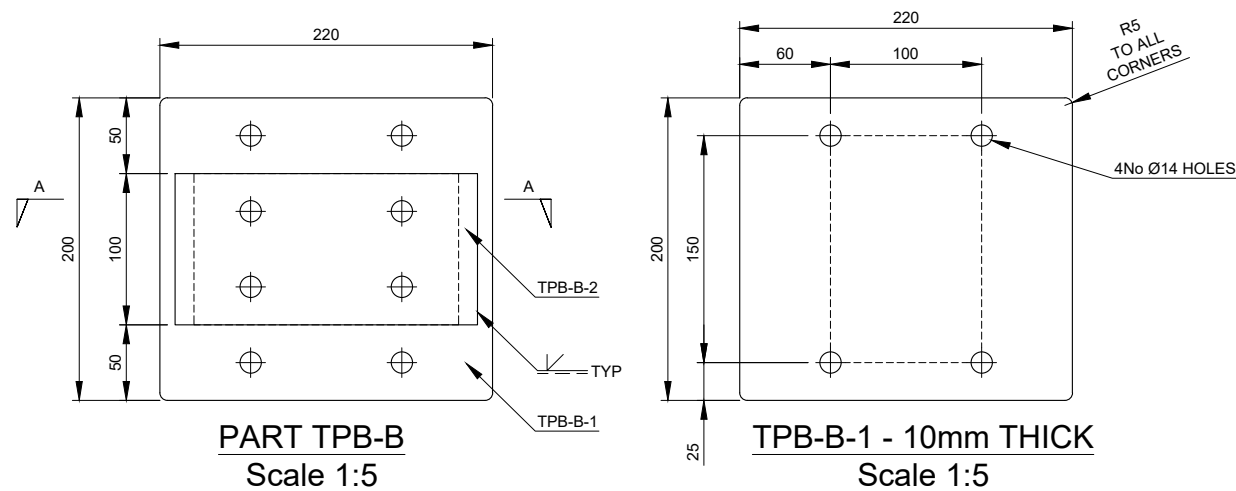

Parts list for TPB-B


Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-B-1	1	220x200x10mm	N/A	S275J0	3.45 kg
02	TPB-B-2	1	PFC 200x75x23	100mm	S275J0	2.30 kg
03	TPB-B-3	2	160x50x5mm	N/A	S275J0	0.31 kg
04	STUDS	4	M12 STUDDING	360mm	GRADE 8.8	0.32 kg
Total Weight:						7.65 kg

- All steel hot dip galvanized
- Each STUD & U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E FLat Washer and 1 Spring Washer
- For fabrtaication notes see drawing 305


01	FIRST ISSUE	AM	03/07/18
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/07/18	CHECKED DATE 03/07/18	APPROVED DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE		SITE ADDRESS	
ANTENNA MOUNTING BRACKET		CLACHAN TARBERT ARGYLL AND BUTE	
PART: TPB-B		PA29 6XP	
ARQIVA REF. 140349		DRG No. 301	REV 01



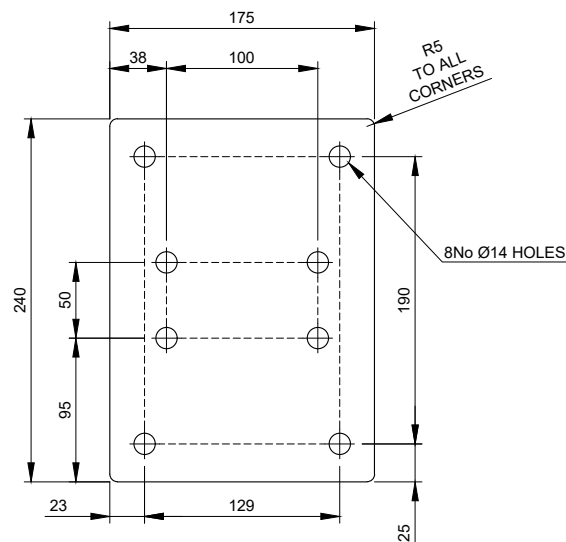

TPC-1 - 10mm THICK
Scale 1:5

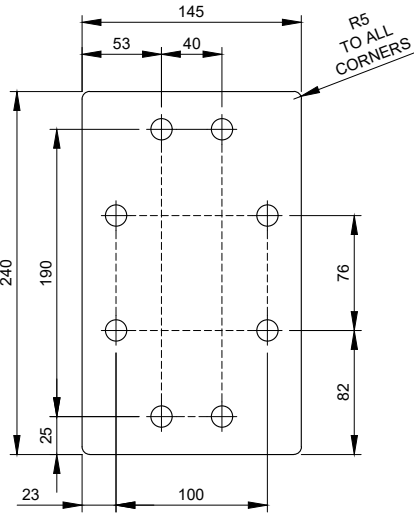

TPC-2 - 10mm THICK
Scale 1:5

Parts list for TPC-1


Item	Part	Quantity	Part description	Length	Material	Weight
01	TPC-1	1	240x175x10mm	N/A	S275J0	3.30 kg
02	BOLT	4	M12 45mm LONG (2D+6)	45mm	GRADE 8.8	-
03	U-BOLT	2	M12 U-BOLT FOR CHS 114.3mm	N/A	GRADE 8.8	-
Total Weight:						3.30 kg

- All steel hot dip galvanized
- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E FLat Washer and 1 Spring Washer
- For fabrctation notes see drawing 305

Parts list for TPC-2

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPC-2	1	240x145x10mm	N/A	S275J0	2.73 kg
02	SQ-BOLT	2	M12 SQ-BOLT FOR SHS 60x60mm	N/A	GRADE 8.8	-
03	U-BOLT	2	M12 U-BOLT FOR CHS 25mm	N/A	GRADE 8.8	-
Total Weight:						2.73 kg

- All steel hot dip galvanized
- Each U-BOLT; SQ-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrctation notes see drawing 305

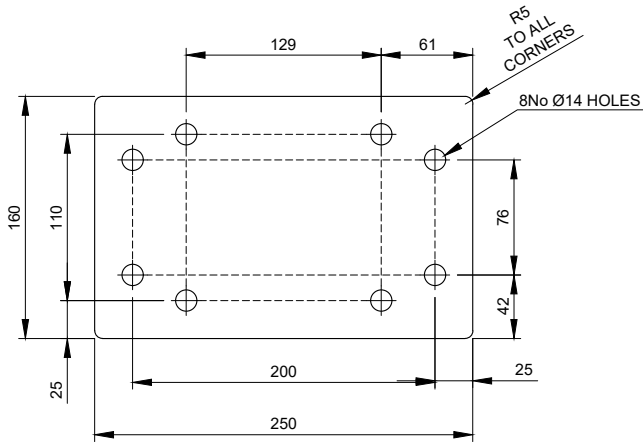


TPC-3 - 10mm THICK
Scale 1:5

Parts list for TPC-3

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPC-3	1	250x160x10mm	300mm	S275J0	3.14 kg
02	U-BOLT	2	M12 U-BOLT FOR CHS 114.3mm	N/A	GRADE 8.8	-
03	SQ-BOLT	2	M12 SQUARE BOLT FOR SHS 60x60	N/A	GRADE 8.8	-
Total Weight:						3.06 kg

- All steel hot dip galvanized
- Each U-BOLT & SQ-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrctation notes see drawing 305

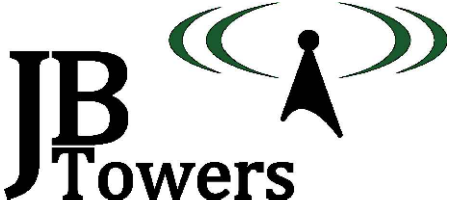

01	FIRST ISSUE					AM	03/07/18
REV	REV					BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN	AM	CHECKED	MP	APPROVED	JBT
		DATE	03/07/18	DATE	03/07/18	DATE	03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.							

TITLE
CROSS OVER PLATES
PARTS: TPC-1; TPC-2; TPC-3


SITE ADDRESS
CLACHAN
TARBERT
ARGYLL AND BUTE
PA29 6XP

ARQIVA REF.
140349
DRG No.
302
REV
01


ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

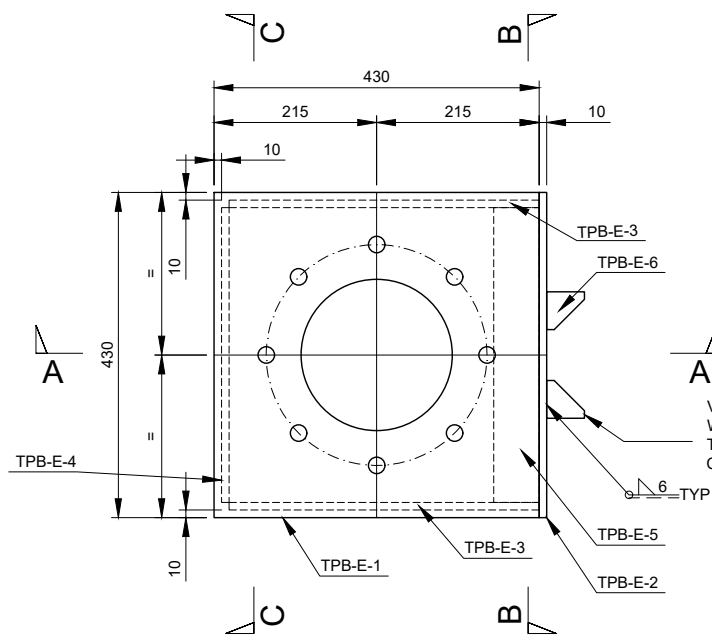


PART TPB-E
Scale 1:10

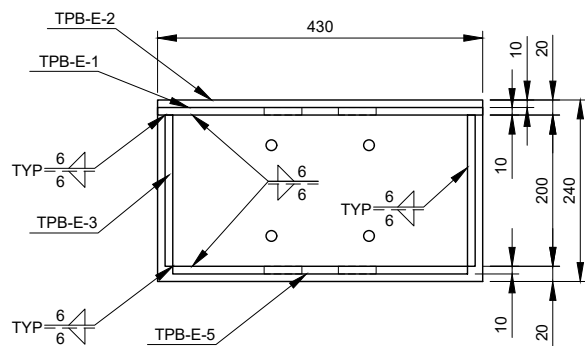


SECTION B-B
Scale 1:10

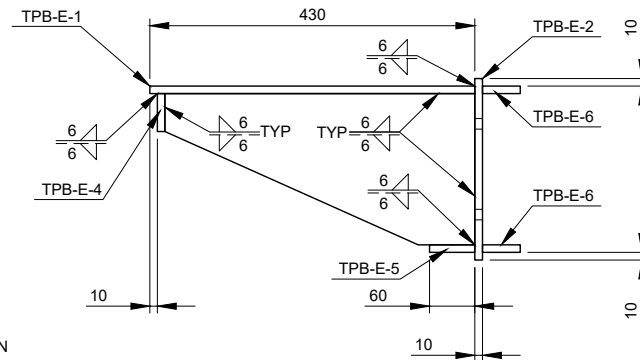


SECTION A-A
Scale 1:10

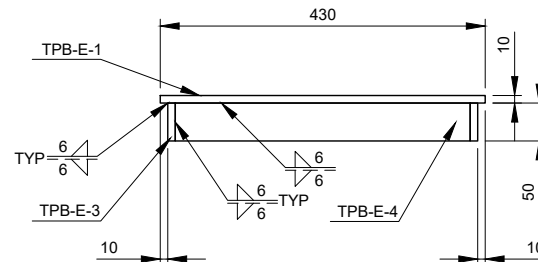


SECTION C-C
Scale 1:10

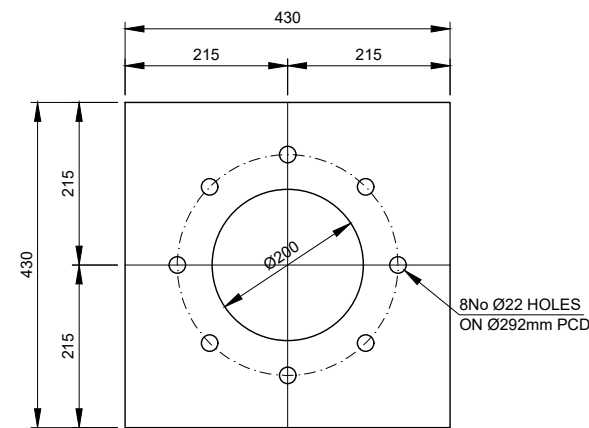


TPB-E-1 - 10mm THICK
Scale 1:10

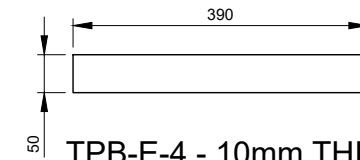


TPB-E-4 - 10mm THICK
Scale 1:10

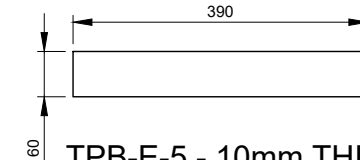


TPB-E-5 - 10mm THICK
Scale 1:10

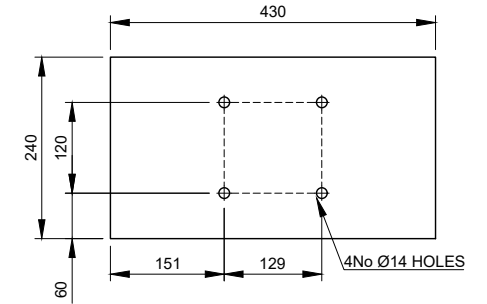

TPB-E-2 - 10mm THICK
Scale 1:10

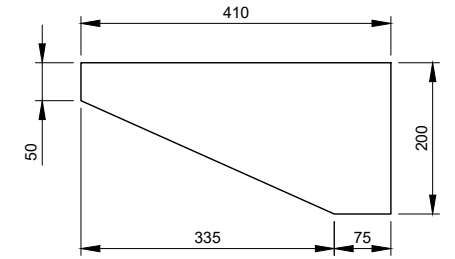

TPB-E-3 - 10mm THICK
Scale 1:10




TPB-E-6 - 10mm THICK
Scale 1:5

Parts list for TPB-E

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-E-1	1	430x430x10mm	N/A	S275J0	14.51 kg
02	TPB-E-2	1	430x240x10mm	N/A	S275J0	8.10 kg
03	TPB-E-3	2	410x200x10mm	N/A	S275J0	6.44 kg
04	TPB-E-4	1	390x50x10mm	N/A	S275J0	1.53 kg
05	TPB-E-5	1	390x60x10mm	N/A	S275J0	1.84 kg
06	TPB-E-6	4	50x50x10mm	N/A	S275J0	0.20 kg
07	BOLT	9	M20x75mm LONG SET BOLT	N/A	Grade 8.8	-
08	U-BOLT	2	M12 U-BOLT FOR CHS 114.3mm	N/A	Grade 8.8	-
Total Weight:						39.66 kg

- All steel hot dip galvanized
- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E FFlat Washer and 1 Spring Washer
- For fabrctation notes see drawing 305

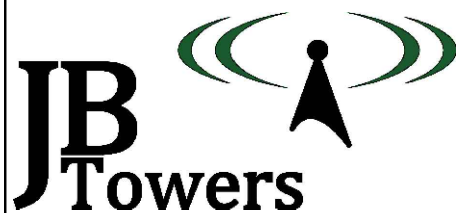


01	FIRST ISSUE	AM	03/07/18
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/07/18	CHECKED DATE 03/07/18	APPROVED DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE	CARDIOID MOUNTING BRACKET			SITE ADDRESS		
PART: TPB-E				CLACHAN TARBERT ARGYLL AND BUTE		
				PA29 6XP		
				ARQIVA REF. 140349	DRG No. 303	REV 01


ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

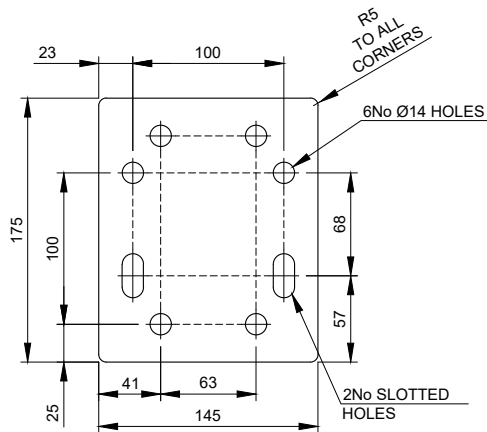


TPA-BR-1 - 10mm THICK
Scale 1:5




SLOTTED HOLE DETAIL
Scale 1:2

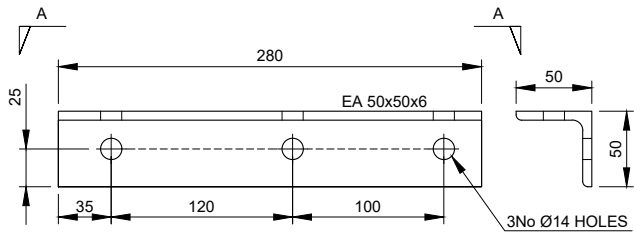


TPA-BR-2 - EA50x50x6
Scale 1:5

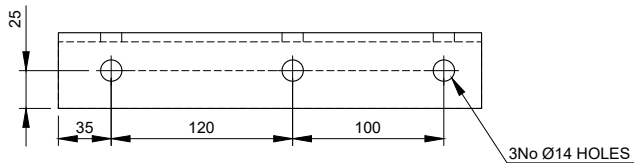


VIEW A-A
Scale 1:5

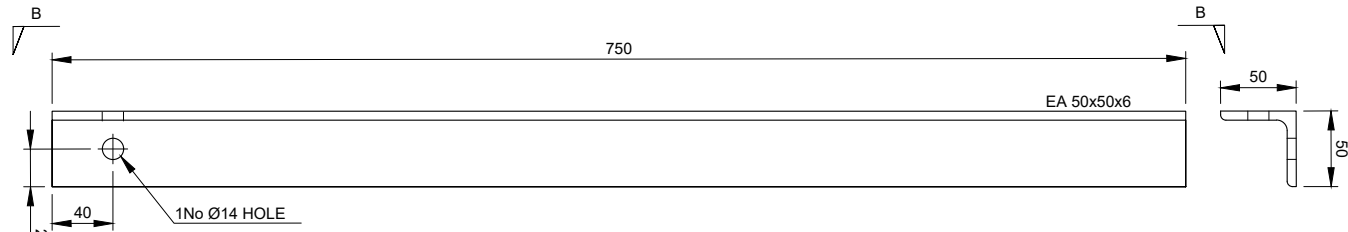

TPA-BR-3 - EA50x50x6
Scale 1:5

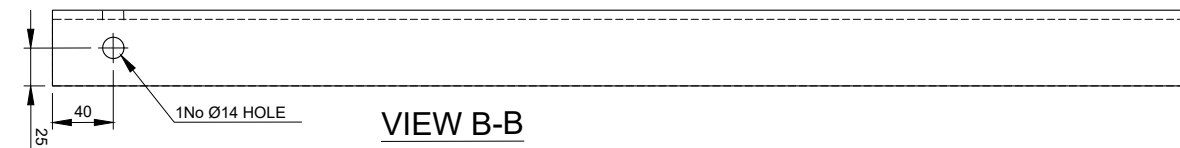

VIEW B-B
Scale 1:5

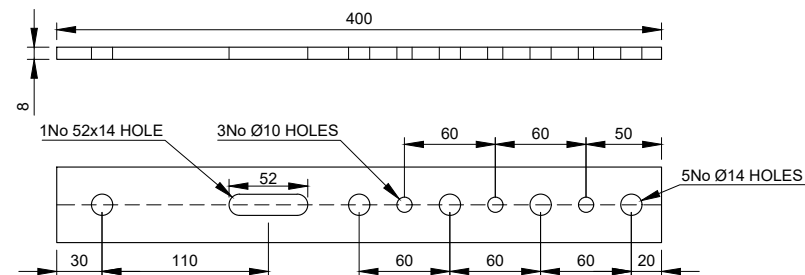

TPA-PD-1 - 8mm THICK
Scale 1:5

Parts list for TPA-BR


Item	Part	Quantity	Part description	Length	Material	Weight
01	TPA-BR-1	3	175x145x10mm	N/A	S275J0	2.00 kg
02	TPA-BR-2	1	EA 50x50x6	280mm	S275J0	1.25 kg
03	TPA-BR-3	1	EA 50x50x6	750mm	S275J0	3.35 kg
04	U-BOLT	12	M12 U-BOLT FOR CHS 48.3mm	N/A	GRADE 8.8	-
05	SQ-BOLT	4	M12 SQUARE BOLT FOR SHS 60x60	N/A	GRADE 8.8	-
06	N-BOLT	2	M12 N-BOLT FOR EA 50x50x6	N/A	GRADE 8.8	-
07	BOLT	1	M12 SET BOLT - 30mm LONG	N/A	GRADE 8.8	-
Total Weight:						10.6 kg

- All steel hot dip galvanized
- Each U-BOLT; N-BOLT; SQ-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E FLat Washer and 1 Spring Washer
- For fabrctation notes see drawing 305

Parts list for TPA-PD

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPA-PD-1	1	400x50x8mm	N/A	S275J0	1.26 kg
04	U-BOLT	1	M12 U-BOLT FOR CHS 114.3mm	N/A	GRADE 8.8	-
Total Weight:						1.26 kg

- All steel hot dip galvanized
- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrctation notes see drawing 305

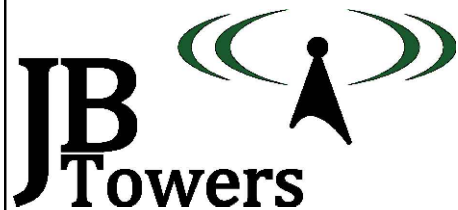

01	FIRST ISSUE	AM	03/07/18
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/07/18	CHECKED DATE 03/07/18	APPROVED DATE 03/07/18
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE		SITE ADDRESS	
Rx ANTENNA BRACING ARM AND POWER DIVIDER SUPPORT STRAP		CLACHAN TARBERT ARGYLL AND BUTE	
PARTS: TPA-BR; TPA-PD		PA29 6XP	
ARQIVA REF. 140349		DRG No. 304	REV 01

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3


NOTES:

1. WELDING TO BE IN ACCORDANCE WITH BS EN 1011-1:2009
2. LINEAR DIMS TO BE WITHIN ±1mm;
3. ANGULAR TOLERANCES TO BE WITHIN 0.5°
4. WELDING SYMBOLS ARE IN ACCORDANCE WITH BS EN 22553:1995
5. ALL PROFILE EDGES TO BE DRESSED AND SHARP CORNERS REMOVED
6. ALL WELD SIZES ARE FINAL SIZES
7. ALL WELDED JOINTS ARE TO BE PICKLE TIGHT
8. ALL STEELWORK TO BE BS EN 10025 GRADE S275 J0 UNO & HOT DIPPED GALVANISED TO BS EN ISO 1461. (ALL HOLLOW SECTIONS TO BE GRADE S355 J0H)
9. ALL STEEL IS TO BE SUPPLIED IN ACCORDANCE WITH EN 1090 TO EXECUTION CLASS 2
10. ALL NON PRE-LOADED BOLTS TO BE COMPLIANT STRUCTURAL BOLTS TO BS EN ISO 15048 PARTS 1&2.
11. STEELWORK COMPONENTS SHALL BE HOT DIP GALVANISED TO ACHIEVE A "VERY HIGH" DURABILITY FOR AN ENVIRONMENT CATEGORY CODE C4 FROM TABLE 1 IN BS EN ISO 14713
12. BOLTS, NUTS AND STUDS SHALL BE SUPPLIED IN ACCORDANCE WITH BS 7371, SPUN GALVANISED IN ACCORDANCE WITH ISO 10684, THE NUTS RE-TAPPED AFTER GALVANISING, AND THE THREADS TREATED WITH GREASE.
13. ALL BOLTS TO BE CUT ON SITE TO EXTEND MAX 10mm BEYOND THE NUT WHEN TIGHTENED UNO.
14. ALL SITE DRILLED HOLE/CUT ENDS TO BE TREATED WITH METAFLUX 70-40 ZINC PASTE FOLLOWED BY 1 COAT OF 7-42 ZINC ALU OR 70-16 ALUMINIUM SPRAY

Item	Part	Drawing	Quantity	Part description	Length	Material	Weight
01	01	200	1	3 MAN LATCHWAY SYSTEM & 3No. WIRE GUIDES FOR FACE MOUNTED MONOPOLE	14000mm	N/A	-
02	TPB-C	300	2	FALL ARREST ATTACHMENT POINT	N/A	S275J0	4.48 kg
03	03	200	36	PERMANENT BT STEP c/w 3No 10x75mm ZINC-PLATED COACH SCREWS	N/A	S275J0	10.80 kg
04	TPS-R	300	9	'MonoStep' ASSEMBLY	N/A	S275J0	22.32 kg
05	TPB-B	301	4	ANTENNA STEELWORK BRACKET	N/A	S275J0	30.60 kg
06	TPC-1	302	4	CROSS OVER PLATE - TPB-B & CHS114	N/A	S275J0	13.20 kg
07	07	203	1	CHS 114.3x5mm	2700mm	S355J2H	36.45 kg
08	TPB-E	303	1	CARDIOID MOUNTING BRACKET	N/A	S275J0	39.66 kg
09	09	203;204	24	M12 WASHER	N/A	GRADE 8.8	-
10	10	204	1	CHS 114.3x5mm	TBC	S355J2H	TBC
11	TPC-3	302	2	CROSS OVER PLATE - CHS114 & SHS60	N/A	S275J0	6.60 kg
12	12	204	1	SHS 60x60x5	2000mm	S355J2H	16.84 kg
13	13	204	1	SHS 60x60x5	1300mm	S355J2H	10.95 kg
14	TPA-BR	304	1	Rx ANTENNA BRACING ARM	N/A	S275J0	10.60 kg
15	TPC-2	302	4	CROSS OVER PLATE - SHS60 & CHS25	N/A	S275J0	10.92 kg
16	16	204	1	CHS 48.3x5mm	1000mm	S355J2H	5.34 kg
17	TPA-PD	304	2	POWER DIVIDER STRAP	N/A	S275J0	2.52 kg
18	18	-	1	FEEDER COVER - 2/CG/100	3350mm	UV RESISTANT PLASTIC	-
19	19	-	15	FEEDER CLAMP - 2/FCD/028	N/A	POLYPROPYLENE	-
20	20	-	15	M10 SCREW DOWELS WTH M10 NUT	100mm	STAINLESS STEEL	-
21	21	201	1	PoleSaver	750mm	N/A	-
22	22	200	8	M12 STUD + 4No NUTS + 2No FLAT WASHERS + 1No Ø50mm WASHER (FOR FALL ARREST SYSTEM)	440mm	GRADE 8.8	2.82 kg
Total Weight:							224.12 kg

- All steel hot dip galvanized

- All U-BOLTS to be FLA supply, each Supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers

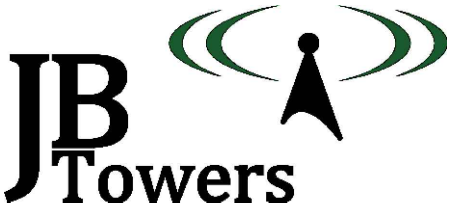

02	PARTS LIST UPDATED			AM	18/07/18
01	FIRST ISSUE			AM	03/07/18
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AM	CHECKED MP	APPROVED	JBT
		DATE 03/07/18	DATE 03/07/18	DATE 03/07/18	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					



TITLE
PARTS LIST

SITE ADDRESS		
CLACHAN TARBERT ARGYLL AND BUTE		
PA29 6XP		
ARQIVA REF. 140349	DRG No. 305	REV 02



ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

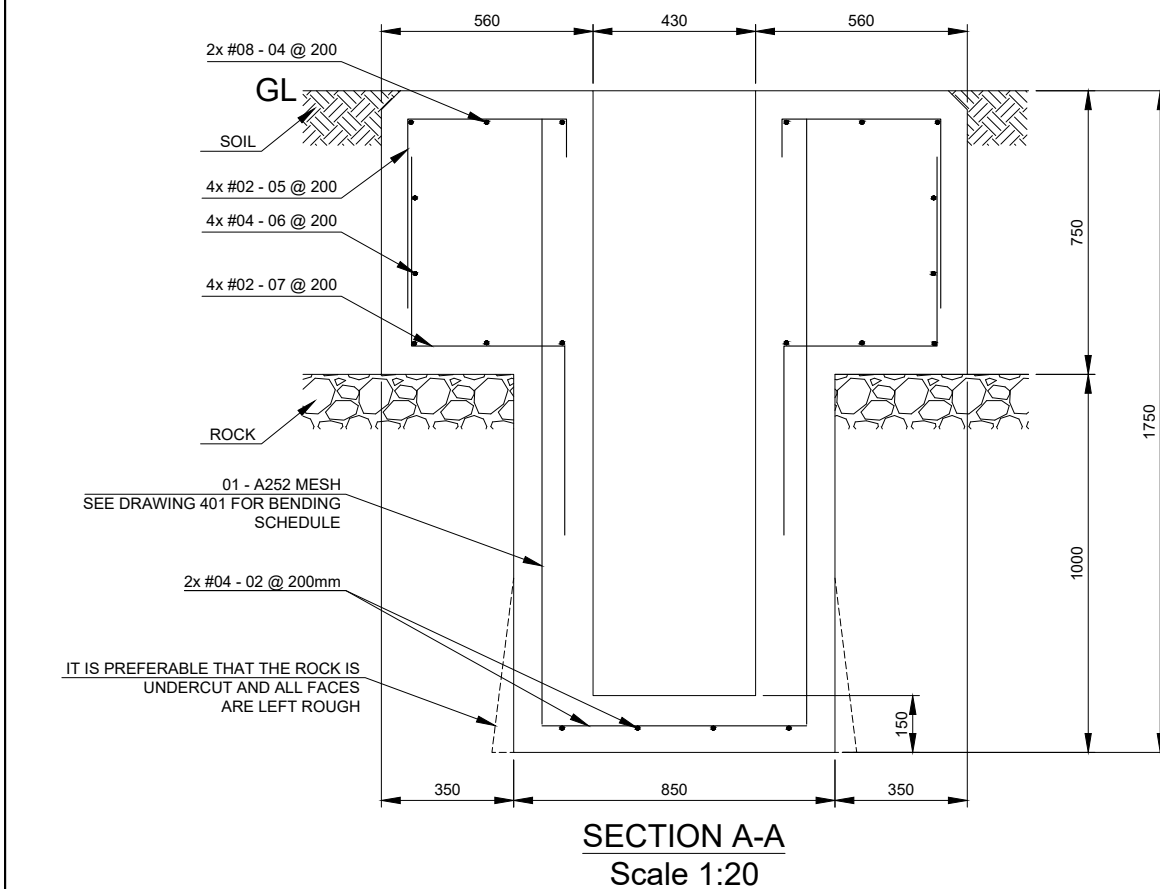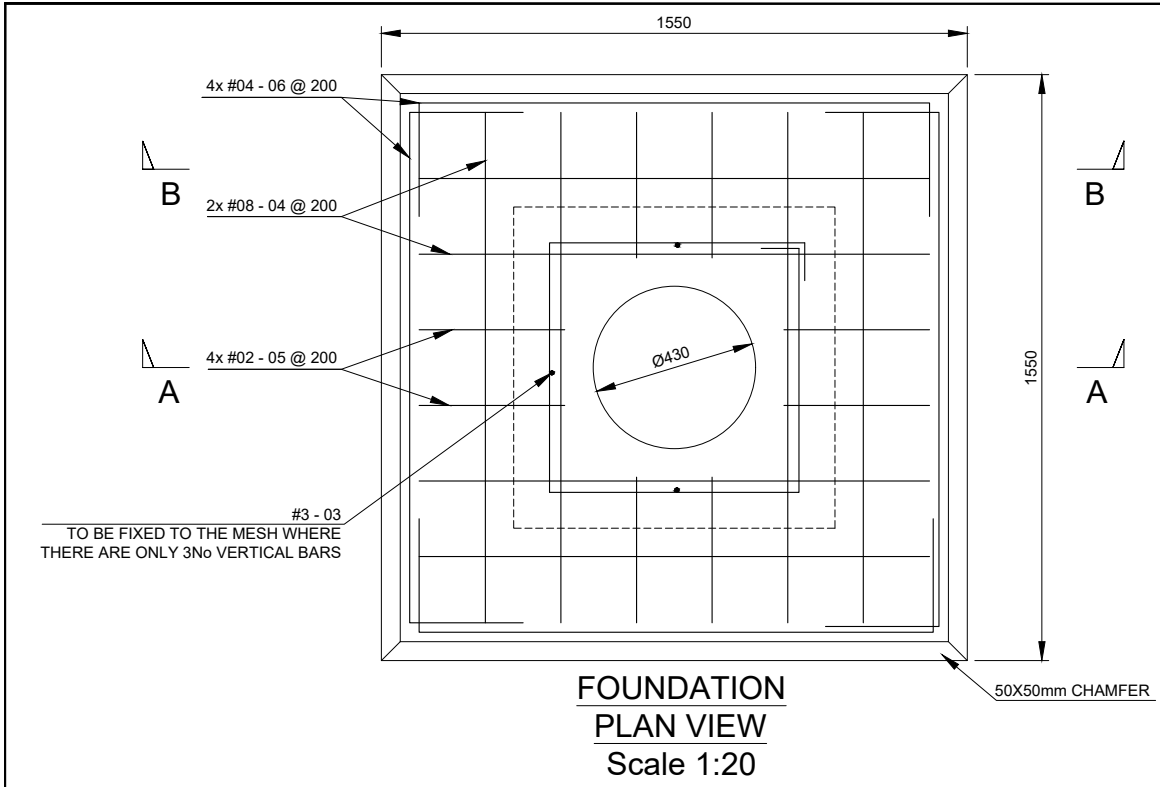

- NOTES:**
1. REFER TO DRAWING 200 FOR TIMBER POLE ORIENTATION
 2. REFER TO DRAWING 401 FOR CONSTRUCTION NOTES AND BAR BENDING SCHEDULE
 3. BASE OF TIMBER POLE TO BE WRAPPED IN 'Polesaver' & INSTALLED AND LEVELLED IN OPENING. TIMBERS TO BE USED TO HOLD POLE IN POSITION & THEN ANNULUS GROUTED UP WITH A NON SHRINK GROUT, FORMING A 50X50mm CHAMFER AROUND THE POLE TO ALLOW WATER DRAINAGE.
 4. ONCE THE GROUT HAS CURED THE TIMBER WEDGES ARE TO BE REMOVED AND THE VOIDS LEFT ARE TO BE FILLED WITH THE SAME NON SHRINK GROUT

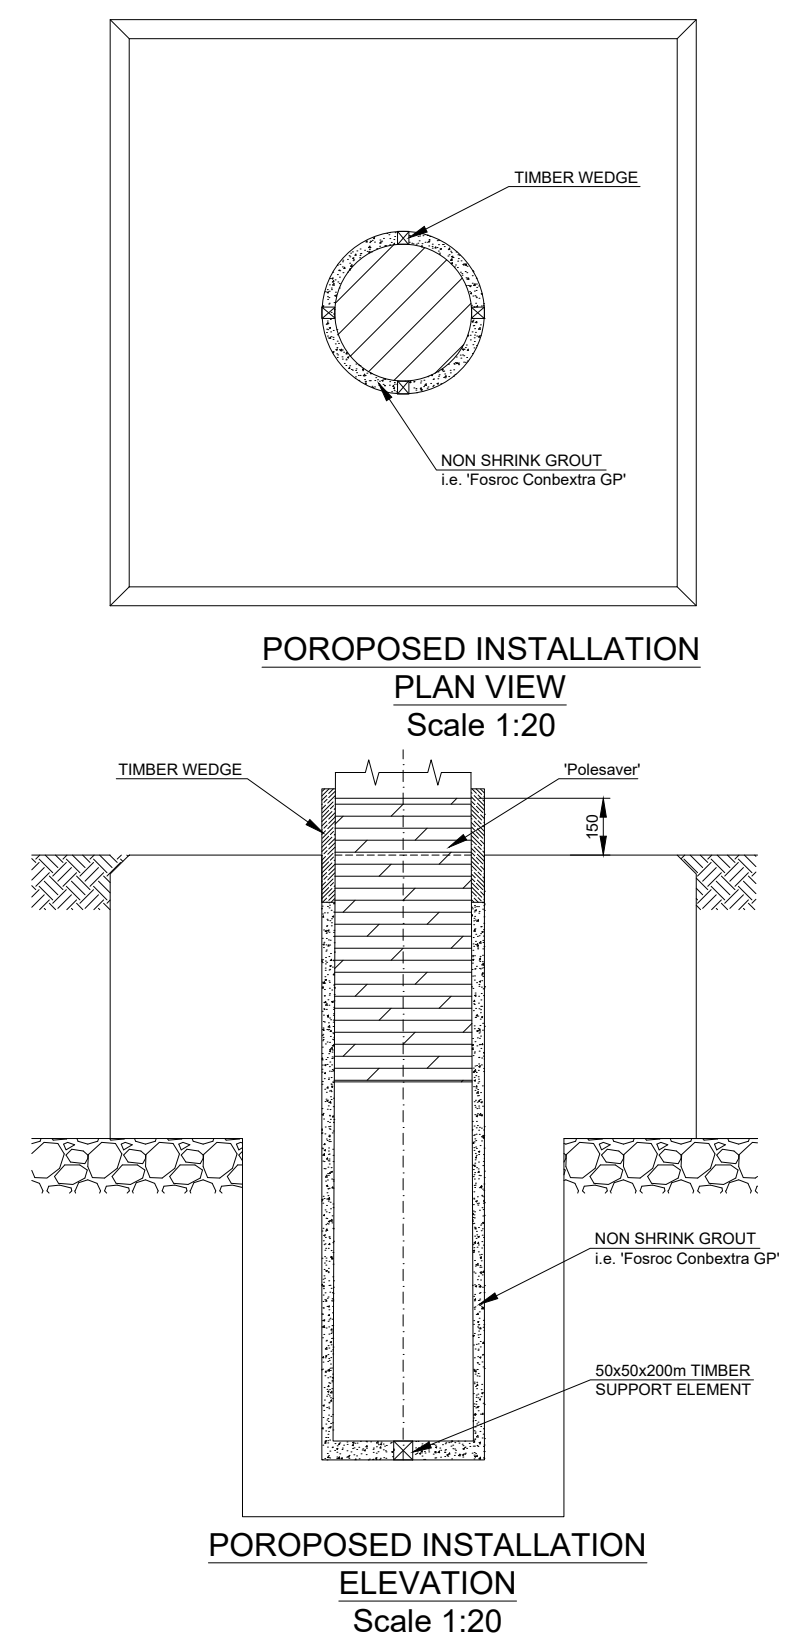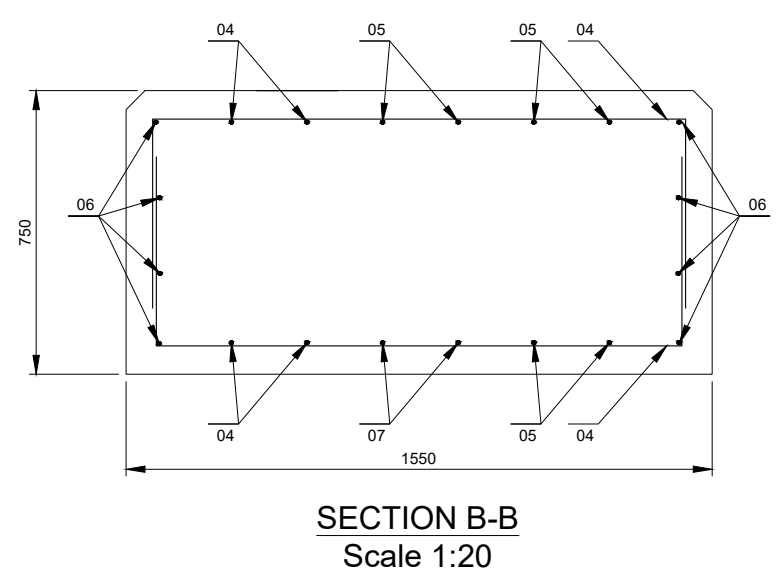

construction built on teamwork

02 FOUNDATION TYPE CHANGED AM 18/07/18 01 FIRST ISSUE AM 03/07/18 REV BY DATE				SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AM DATE 03/07/18		CHECKED MP DATE 03/07/18		APPROVED JBT DATE 03/07/18	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.											

TITLE

**TIMBER POLE ROCK
FOUNDATION**

SITE ADDRESS

**CLACHAN
TARBERT
ARGYLL AND BUTE**


PA29 6XP

ARQIVA REF.
140349


DRG No.
400

REV
02

ALL SCALES AS SHOWN WHEN PRINTED AT A3

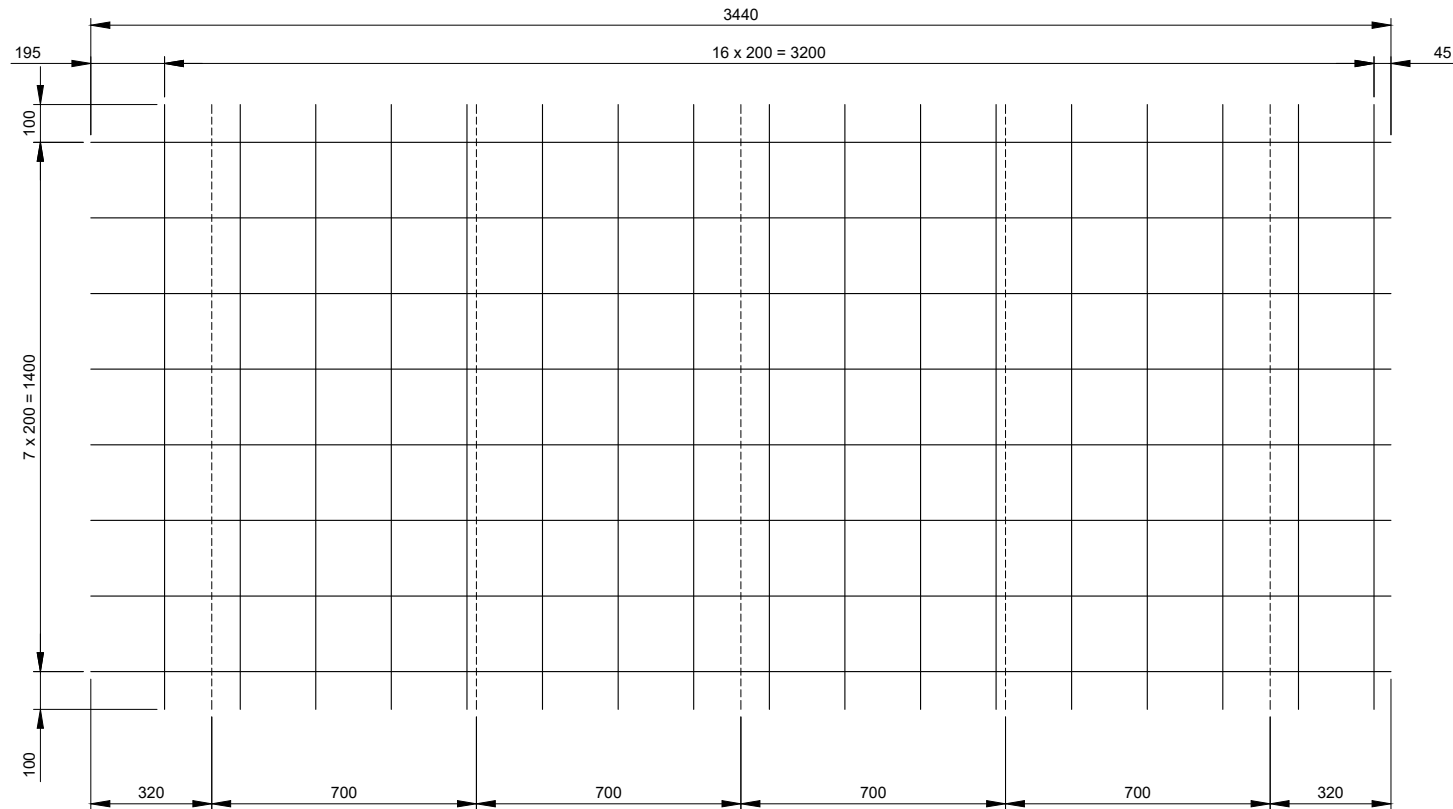


01- A252 MESH
1600x3440mm
Scale 1:20

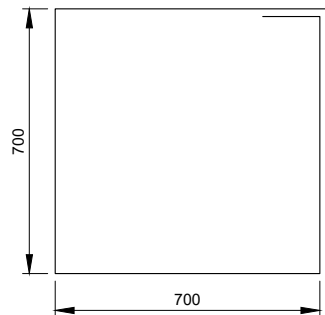

01- A252 MESH
1600x3440mm
Scale 1:20

- CONSTRUCTION NOTES:
- 1. CONCRETE GRADE - C30/37
-CEMENT DESIGNATION CEM1 OR IIA
-CONSISTENCY CLASS S3
-AGGREGATES TO BE FREEZE-THAW RESISTANT, TO BS EN 12620
-MAXIMUM CEMENT/WATER RATIO - 0.55
-MINIMUM CEMENT CONTENT - 320 kg/m3
-SAMPLING AND TESITING OF FRESH HARDENED CONCRETE SHALL COMPLY WITH BS EN 206-1. SAMPLES TO BE TAKEN FROM EACH BATCH AT POINT OF DELIVERY, OR AS REQUIRED BY ARQIVA'S SITE REPRESENTATIVE.
 - 2. REINFORCING STEELWORK - GRADE B500B
 - 3. REINFORCEMENT COVER - 75mm
 - 4. 1:60 FALL TO BE FORMED AT THE TOP SURFACE TO PREVENT PONDING
 - 5. FACE OF ROCK TO BE SCABBLED, WASHED AND CLEANED AND COATED WITH A BONDING AGENT PRIOR CASTING NEW CONCRETE.
 - 6. NOTIFY ARQIVA'S PROJECT ENGINEER OF THE INTENDED EXCAVATION AND POUR DATES, GIVING MINIMUM NOTICE OF 2 WORKING DAYS.
 - 7. REMOVE ALL SPOIL AND LEAVE SITE IN A TIDY CONDITION.

BAR BENDING SCHEDULE IN ACCORDANCE WITH BS 8666											
BAR MARK	TYPE AND SIZE	NO. OF MBRS	NO. OF BARS IN EACH	TOTAL NO.	LENGTH OF EACH BAR	SHAPE CODE	A mm	B mm	C mm	D mm	E mm
01	A252	01	01	01	-	99					
02	H8	01	08	08	1120	21	250	650	250		
03	H8	01	03	03	1600	00	1600				
04	H10	01	16	16	2370	21	500	1400	500		
05	H10	01	8	8	980	21	500	410	100		
06	H10	01	16	16	1970	21	300	1400	300		
07	H10	01	8	8	1380	23	500	410	500		

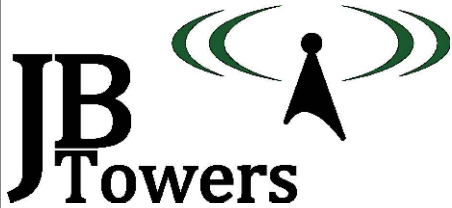

02	BAR BENDING SCHEDULE UPDATED			AM	18/07/18
01	FIRST ISSUE			AM	03/07/18
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN	AM	CHECKED	MP
		DATE	03/07/18	DATE	03/07/18
APPROVED JBT					
DATE 03/07/18					
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE
BAR BENDING SCHEDULE

SITE ADDRESS CLACHAN TARBERT ARGYLL AND BUTE PA29 6XP		
ARQIVA REF. 140349	DRG No. 401	REV 02

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3