

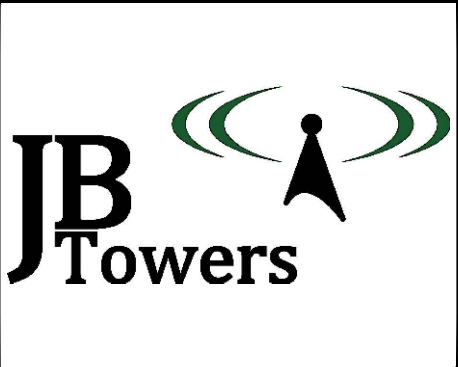


DRAWING ISSUE SHEET

[illegible]

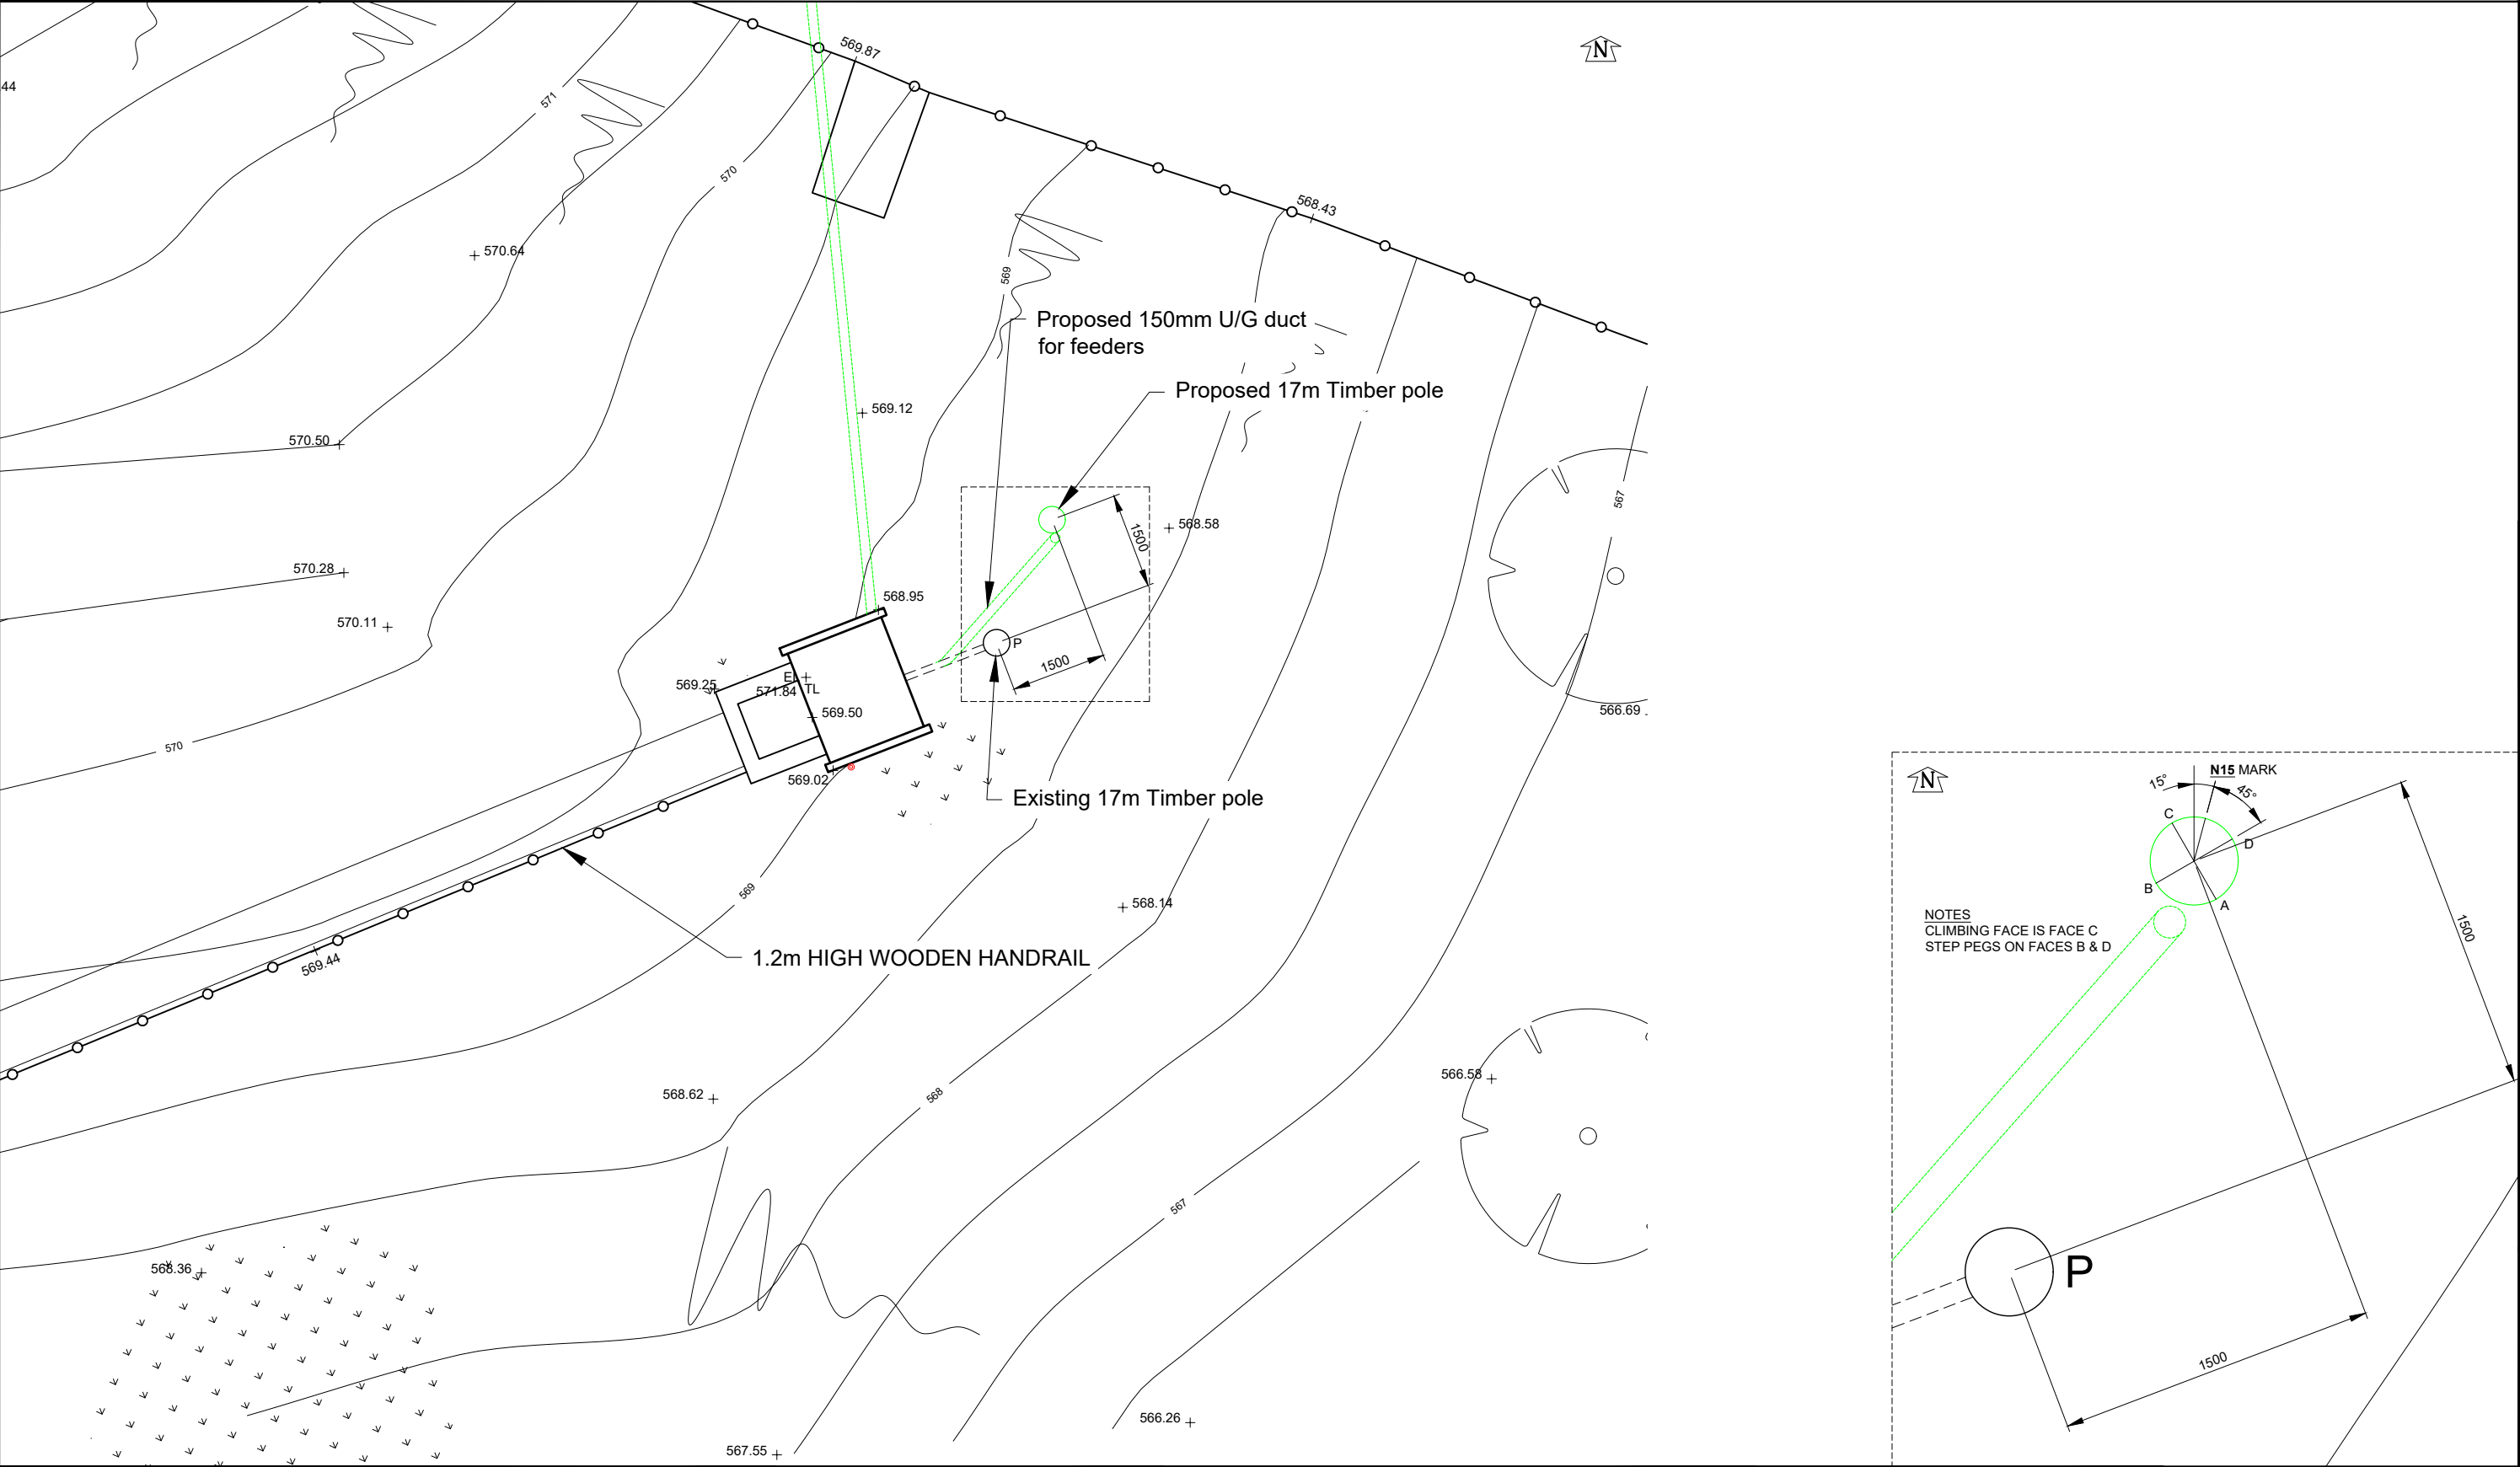

01	FIRST ISSUE			AM	21/08/19
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AM	CHECKED	MP
WHEN PRINTED AT A3		DATE	21/08/19	DATE	21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED.		APPROVED			
THIS DRAWING TO BE READ IN CONJUNCTION WITH		JBT			
OTHER RELEVANT DRAWINGS.		DATE 21/08/19			


TITLE

BRAEMAR

SITE PLAN

SITE ADDRESS		
MAR LODGE		
BRAEMAR		
ABERDEENSHIRE		
AB35 5YJ		
ARQIVA REF.	DRG No.	REV
140242	100	01

ALL SCALES AS SHOWN WHEN PRINTED AT A3

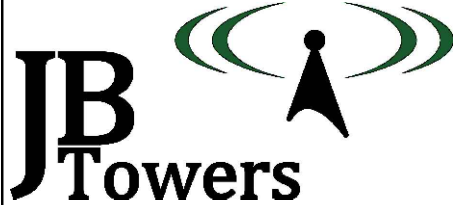

01	FIRST ISSUE			AM	21/08/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AM DATE 21/08/19	CHECKED MP DATE 21/08/19	APPROVED JBT DATE 21/08/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE

BRAEMAR

GENERAL ARRANGEMENT

SHEET 1 OF 3

SITE ADDRESS

MAR LODGE

BRAEMAR

ABERDEENSHIRE

AB35 5YJ

ARQIVA REF.



140242

DRG No.

200

REV

01

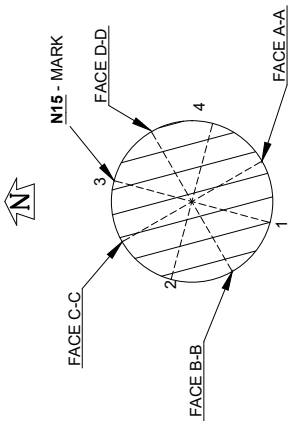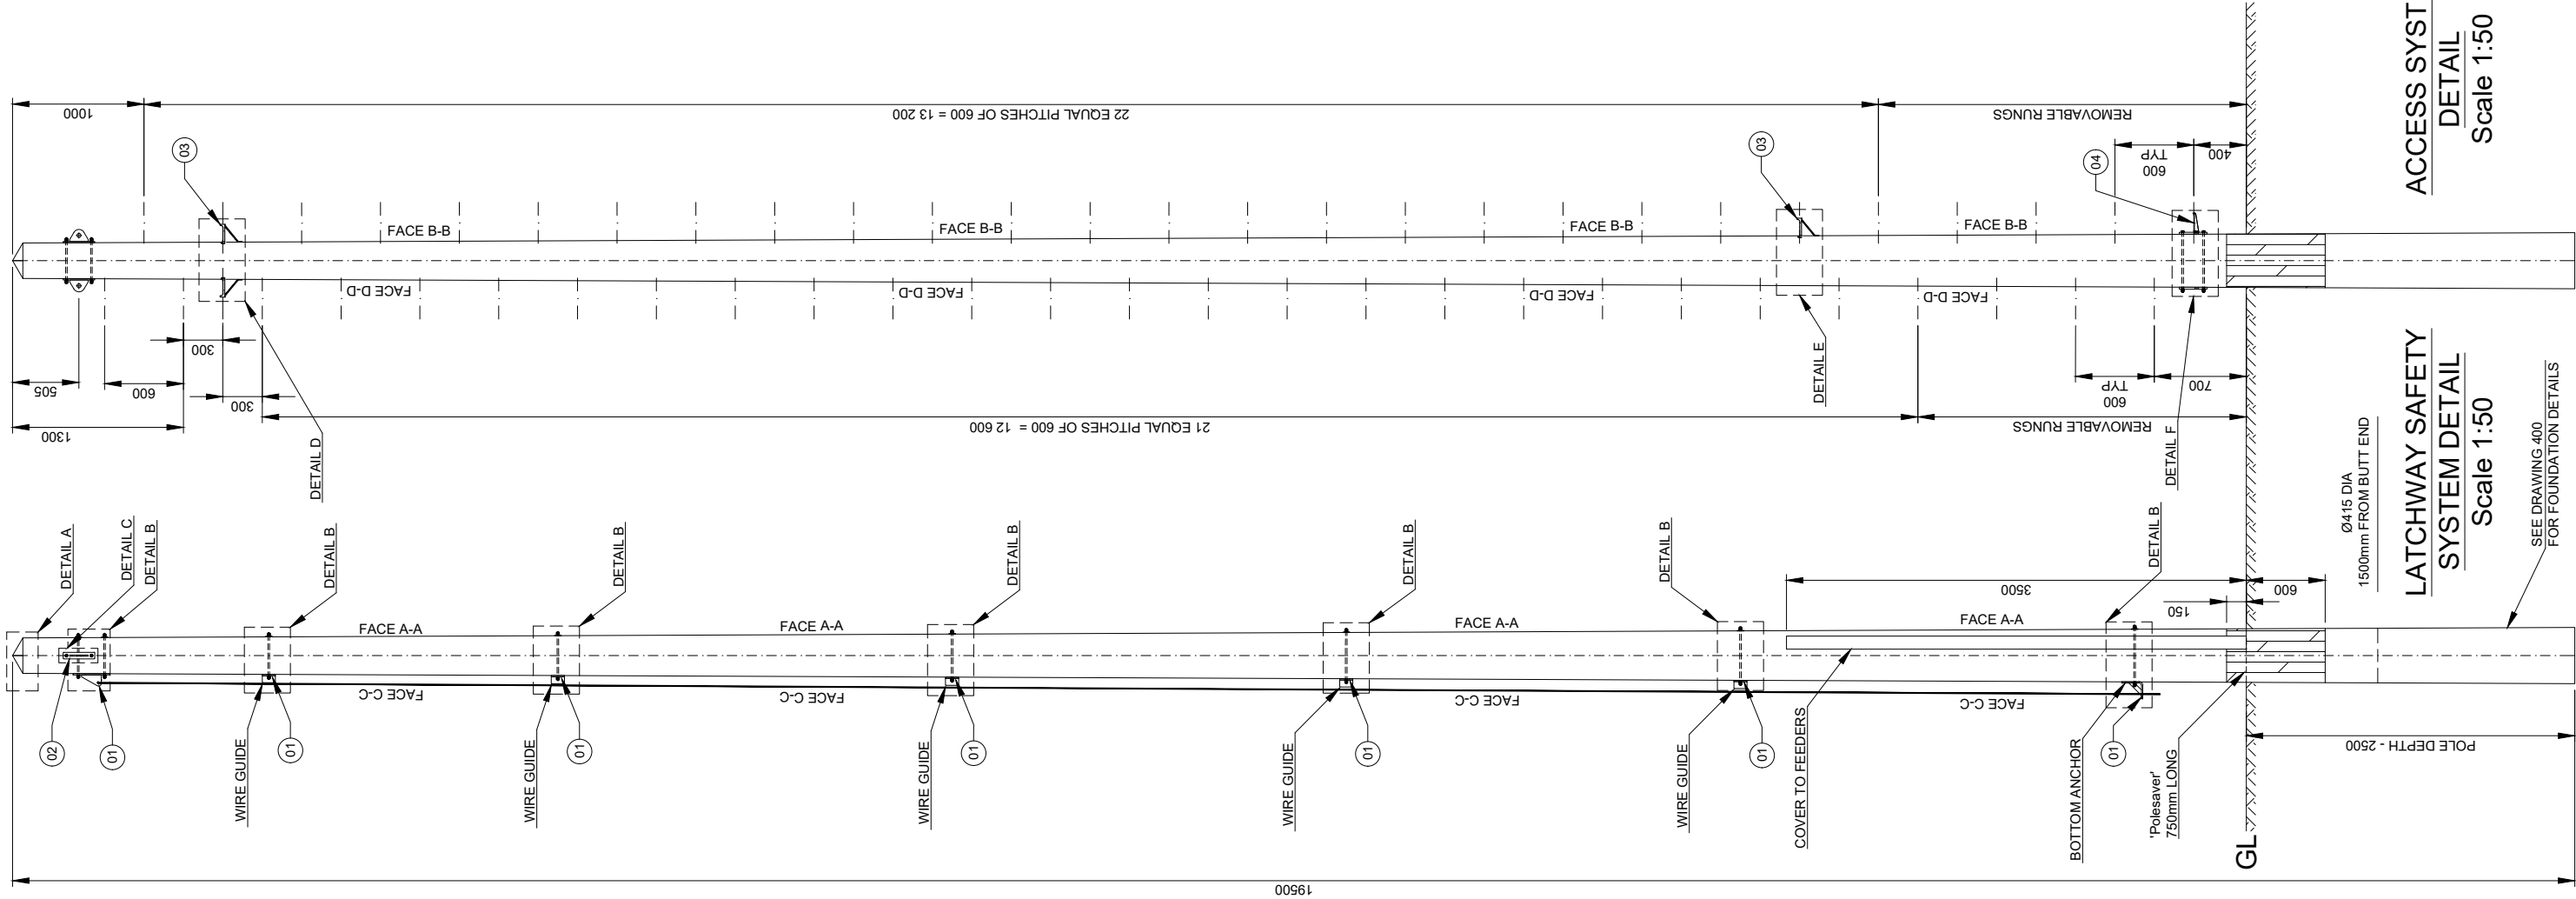

NOTES

1. SEE DRAWING 304 FOR PARTS LIST
2. ALL BOLTS TO BE CUT ON SITE TO EXTEND MAX 10mm BEYOND THE NUT WHEN TIGHTENED UNO.
3. ALL SITE DRILLED HOLE/CUT ENDS TO BE TREATED WITH METAFUX 70-40 ZINC PASTE FOLLOWED BY 1 COAT OF 7-42 ZINC ALU OR 70-16 ALUMINIUM SPRAY

TIMBER POLE

1. POLE TO BE SUPPLIED IN ACCORDANCE WITH BS EN14229 & SHALL HAVE MIN. CHARACTERISTIC BENDING STRENGTH OF 30N/mm2 & MIN. YOUNGS MODULUS (PARALLEL TO GRAIN) OF 10KN/mm2.
2. MARKINGS ON FINISHED POLE SHALL BE AT 4m FROM BUTT AND COMPLY WITH BS EN 14229 UNO
3. AS FAR AS PRACTICABLE ALL CUTTING, SCARFING & DRILLING TO BE DONE BEFORE CREOSOTING. IF NOT ALL CUT, DRILLED & SCARFED SURFACES TO BE COATED WITH A MIXTURE OF CREOSOTE & TAR.
4. POLE TO BE PRESSURE IMPREGNATED WITH CREOSOTE IN ACCORDANCE WITH BS EN 14229
5. MINIMUM DIAMETERS
TOP - Ø206mm
BOTTOM - Ø430mm
6. 19.5m LONG POLE TO BE SOURCED BY TRIMMING 20m LONG POLE BY 0.5m AT THE TOP

PLANTING


1. CAT SCANNER IS TO BE USED IN ORDER TO CONFIRM THE POSITIONS OF BURIED SERVICES.
2. TIMBER POLE TO BE PLANTED WITH M15 MARKING AT 3.5m FROM BUTT FACING 15° FROM NORTH (CLOCKWISE)
3. SEE DRAWING 400 FOR FOUNDATION DETAILS

ACCESS SYSTEM
DETAIL
Scale 1:50

LATCHWAY SAFETY
SYSTEM DETAIL
Scale 1:50

ALL SCALES AS SHOWN WHEN PRINTED AT A3

ALL SCALES AS SHOWN WHEN PRINTED AT A3

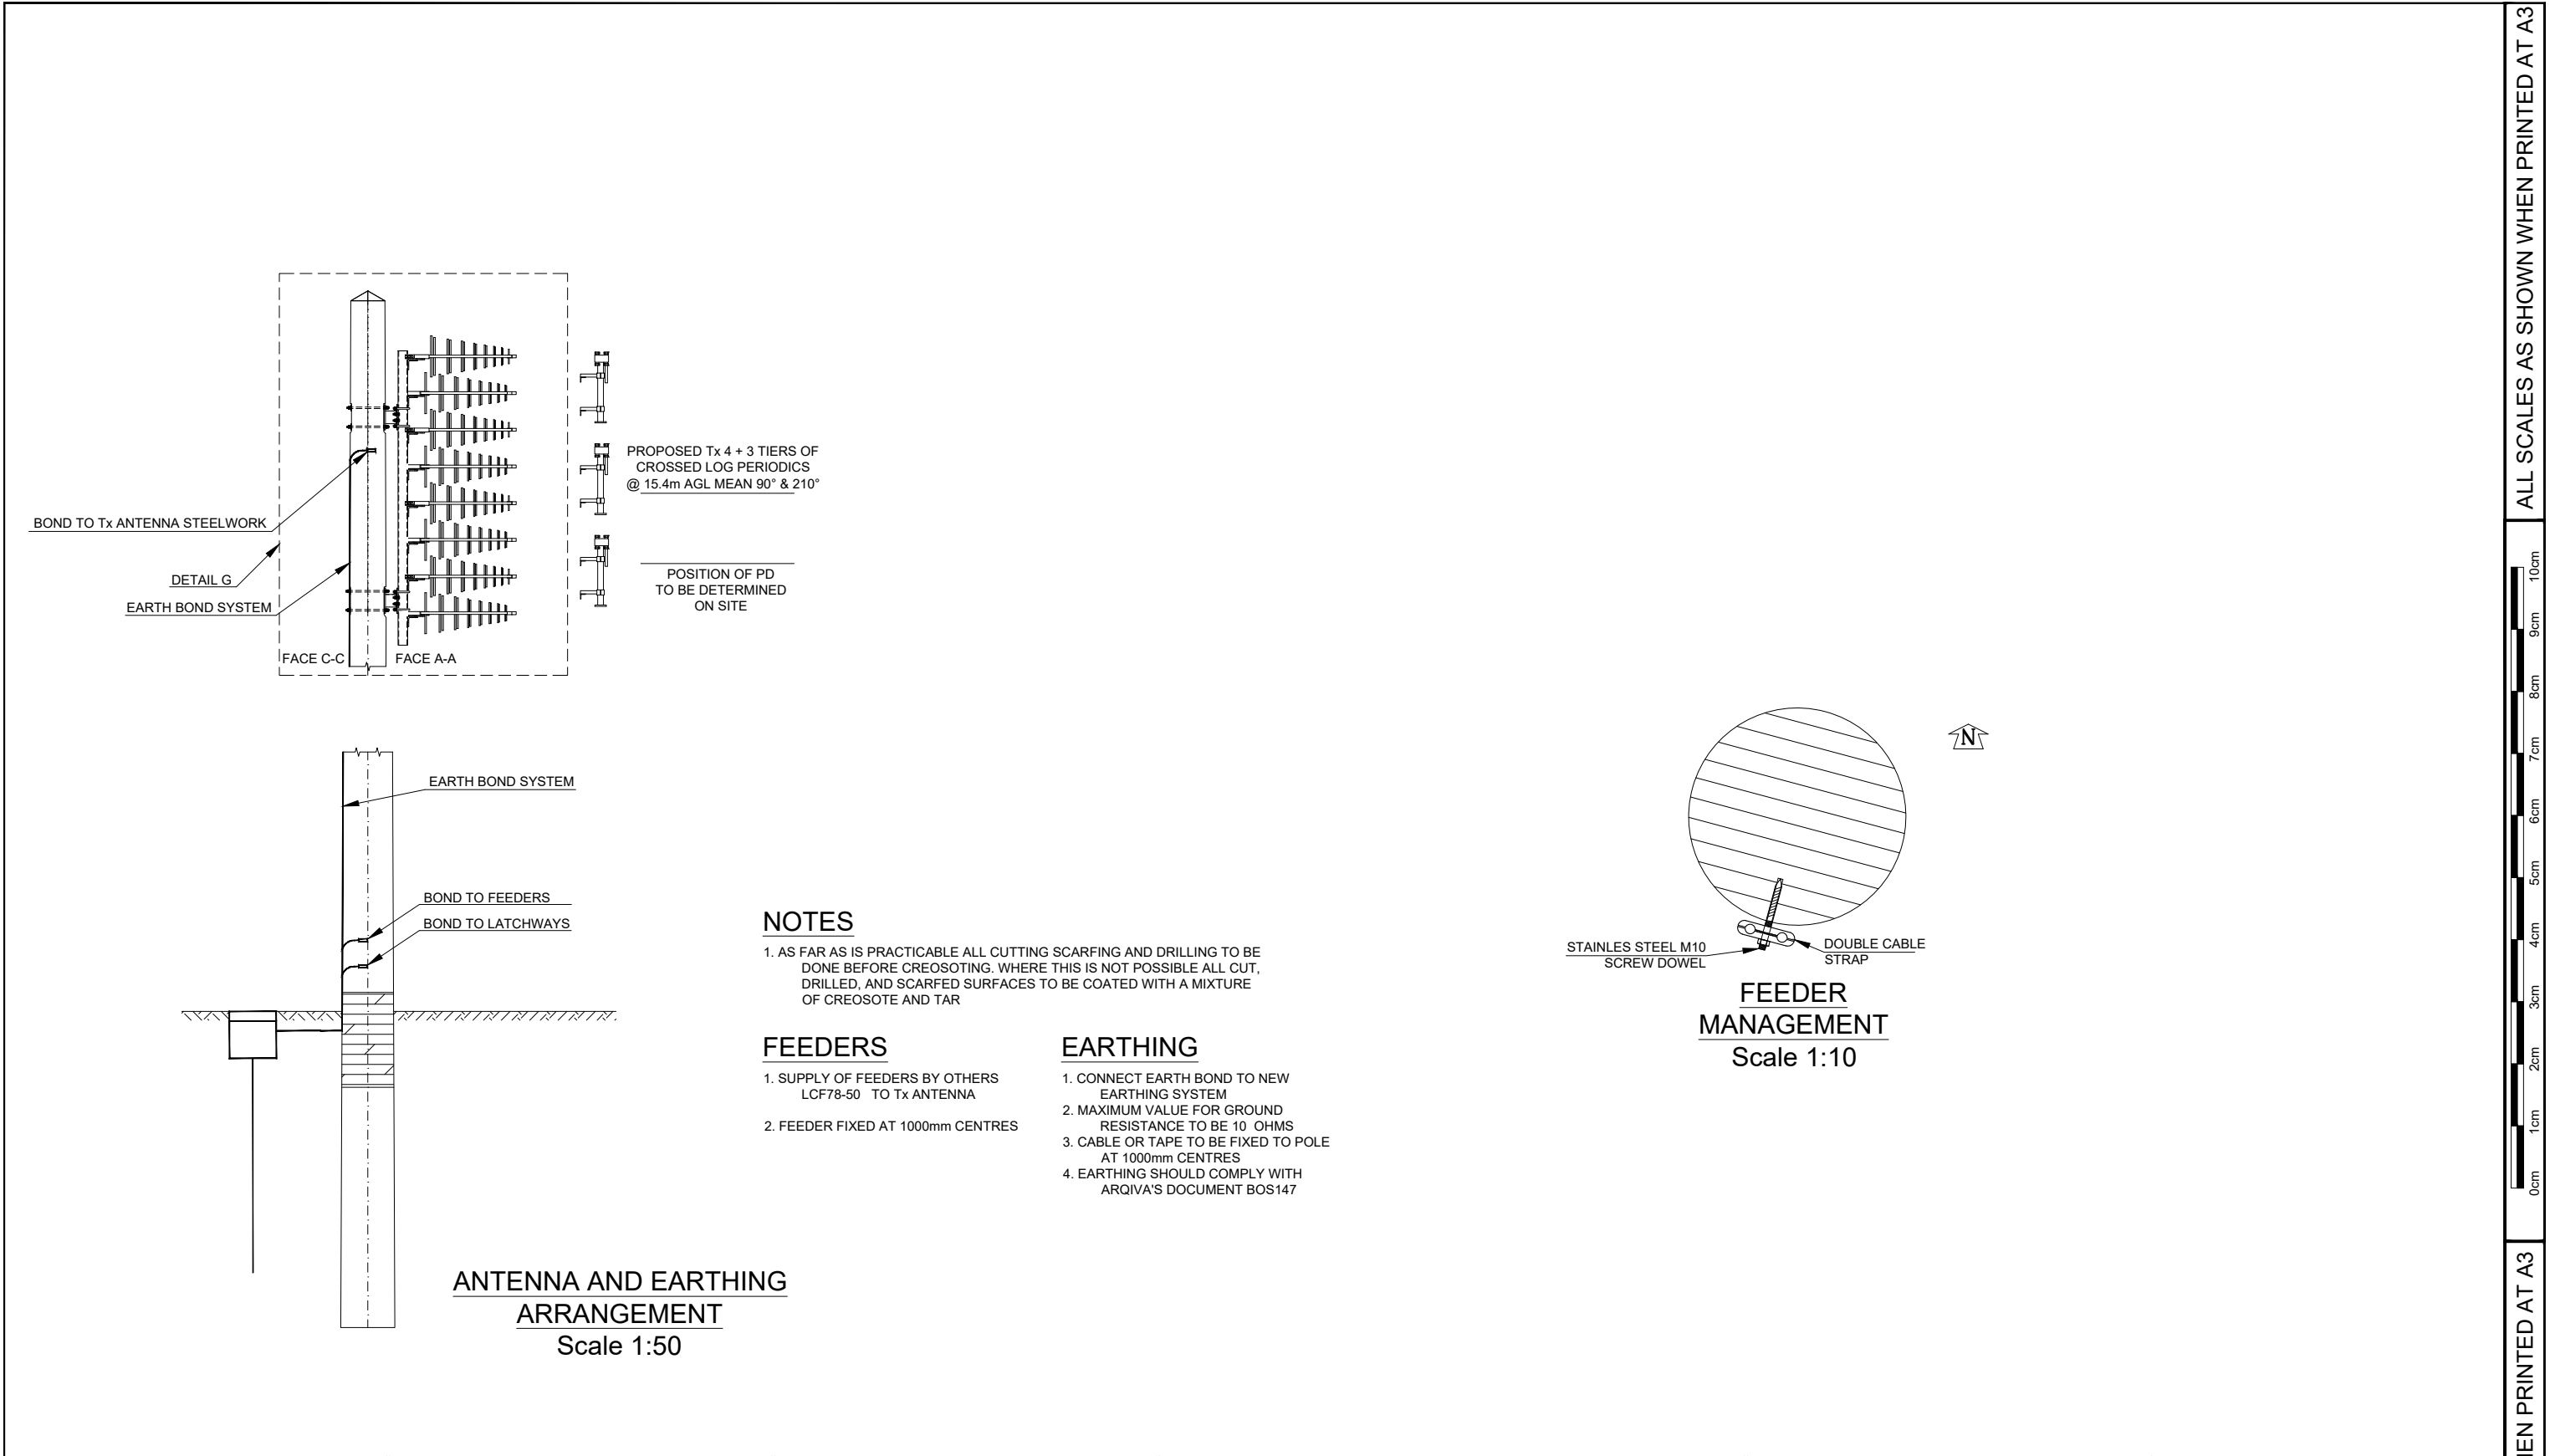

NOTES

- 1. AS FAR AS IS PRACTICABLE ALL CUTTING SCARFING AND DRILLING TO BE DONE BEFORE CREOSOTING. WHERE THIS IS NOT POSSIBLE ALL CUT, DRILLED, AND SCARFED SURFACES TO BE COATED WITH A MIXTURE OF CREOSOTE AND TAR

FEEDERS


- 1. SUPPLY OF FEEDERS BY OTHERS LCF78-50 TO Tx ANTENNA
- 2. FEEDER FIXED AT 1000mm CENTRES

EARTHING

- 1. CONNECT EARTH BOND TO NEW EARTHING SYSTEM
- 2. MAXIMUM VALUE FOR GROUND RESISTANCE TO BE 10 OHMS
- 3. CABLE OR TAPE TO BE FIXED TO POLE AT 1000mm CENTRES
- 4. EARTHING SHOULD COMPLY WITH ARQIVA'S DOCUMENT BOS147

ANTENNA AND EARTHING ARRANGEMENT
Scale 1:50

FEEDER MANAGEMENT
Scale 1:10

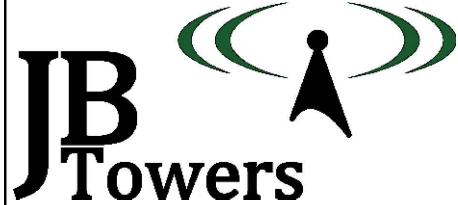

01	FIRST ISSUE			AM	21/08/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN	AM	CHECKED	MP
		DATE	21/08/19	DATE	21/08/19
		APPROVED	JBT	DATE	21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					


TITLE
BRAEMAR
GENERAL ARRANGEMENT
SHEET 2 OF 3

SITE ADDRESS
MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF. 140242	DRG No. 200	REV 01
------------------------------	-----------------------	------------------


ALL SCALES AS SHOWN WHEN PRINTED AT A3






- NOTES:
1. A SINGLE COAT OF TIMBER COMPATIBLE BITUMINOUS PAINT (E.G. BIRD BRAND BLACK BITUMINOUS PAINT OR SIMILAR APPROVED PRODUCT) TO BE APPLIED TO THE UPPER SURFACES AT THE TOP OF THE POLE.
 2. PAINT TO BE APPLIED ON SITE JUST BEFORE ERECTION
- FORM: 4 WAY PYRAMID / CONE


DETAIL A - TIMBER POLE TOP
Scale 1:20

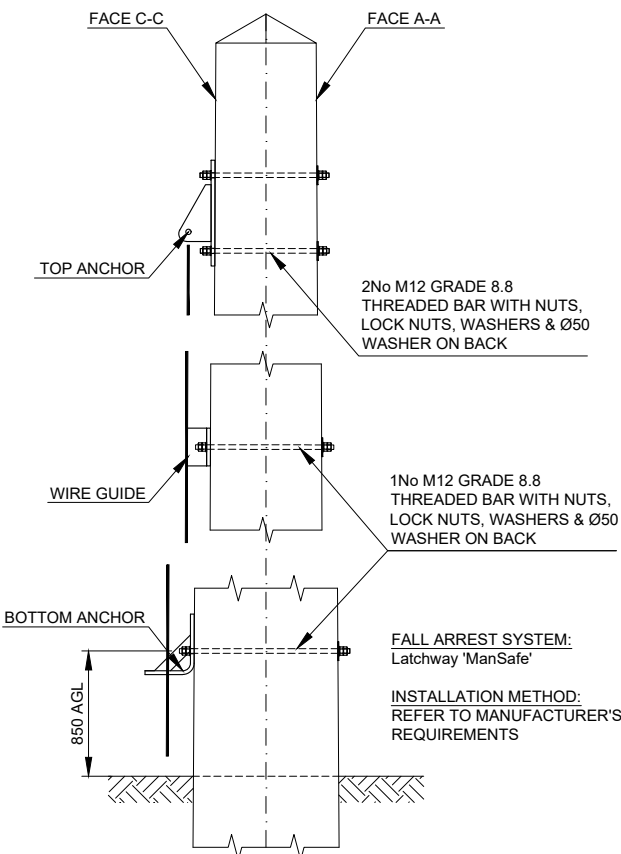


DETAIL B - FALL ARREST SYSTEM
Scale 1:20

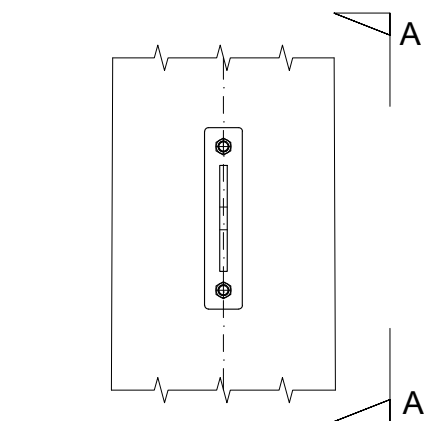

DETAIL C - FALL ARREST
ATTACHMENT POINT
Scale 1:10

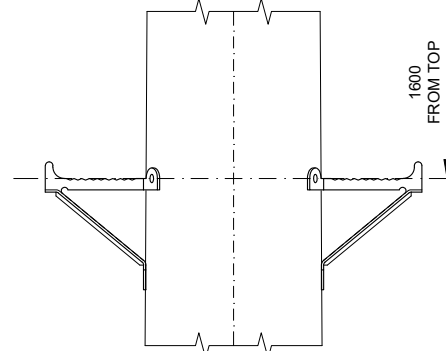


DETAIL D - ANTENNA
ACCESS CLIMBING STEP
Scale 1:10

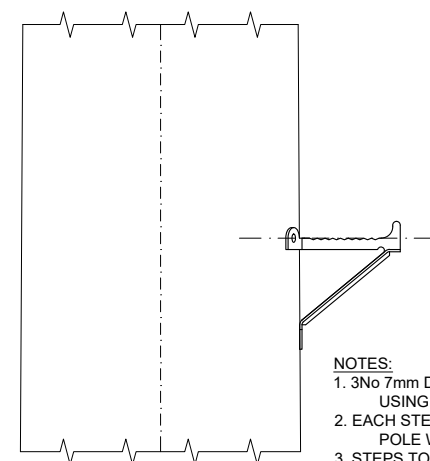


DETAIL E - PERMANENT
CLIMBING STEPS
Scale 1:10


- NOTES:
1. 3No 7mm DIA 70mm LONG PILOT HOLES TO BE DRILLED USING THE STEP AS A TEMPLATE
 2. EACH STEP SHOULD BE FIXED TO THE TIMBER POLE WITH 3No 10mm COACH SCREWS 75mm LONG
 3. STEPS TO BE INSTALLED ON FACES B-B & D-D ONLY

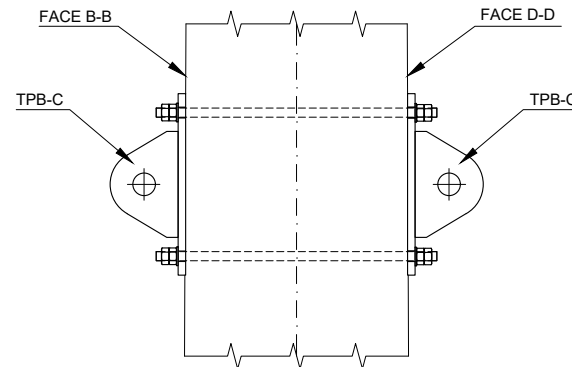

VIEW A-A
Scale 1:10

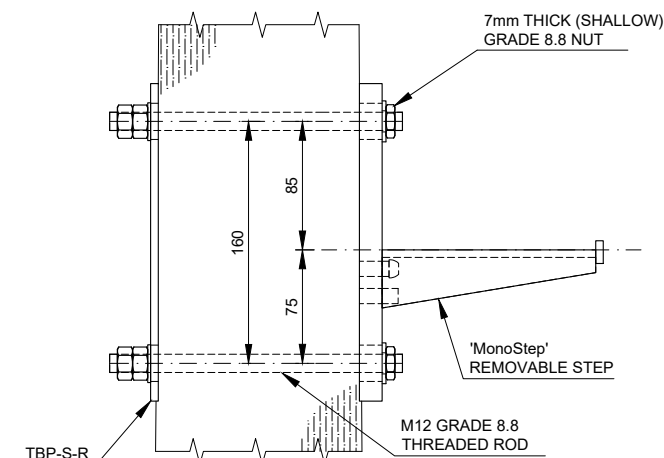

DETAIL F - REMOVABLE
CLIMBING STEPS
Scale 1:5

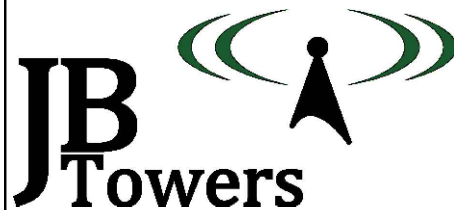

01	FIRST ISSUE	AM	21/08/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 21/08/19	CHECKED DATE 21/08/19	APPROVED DATE 21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
BRAEMAR
GENERAL ARRANGEMENT
SHEET 3 OF 3


SITE ADDRESS
MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF.
140242


DRG No.
200

REV
01

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

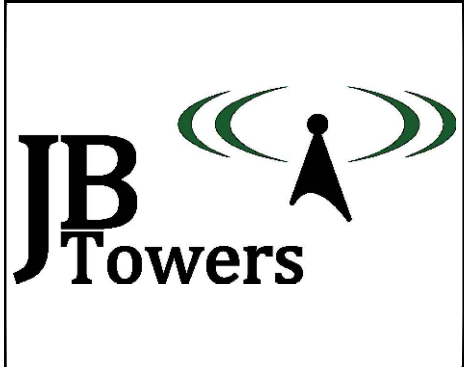

01	FIRST ISSUE			AM	21/08/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AM DATE 21/08/19	CHECKED MP DATE 21/08/19	APPROVED JBT DATE 21/08/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE

BRAEMAR


TIMBER POLE HOLE SET OUT

SHEET 1 OF 2


SITE ADDRESS

MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF. 140242	DRG No. 201	REV 01
-----------------------	----------------	-----------

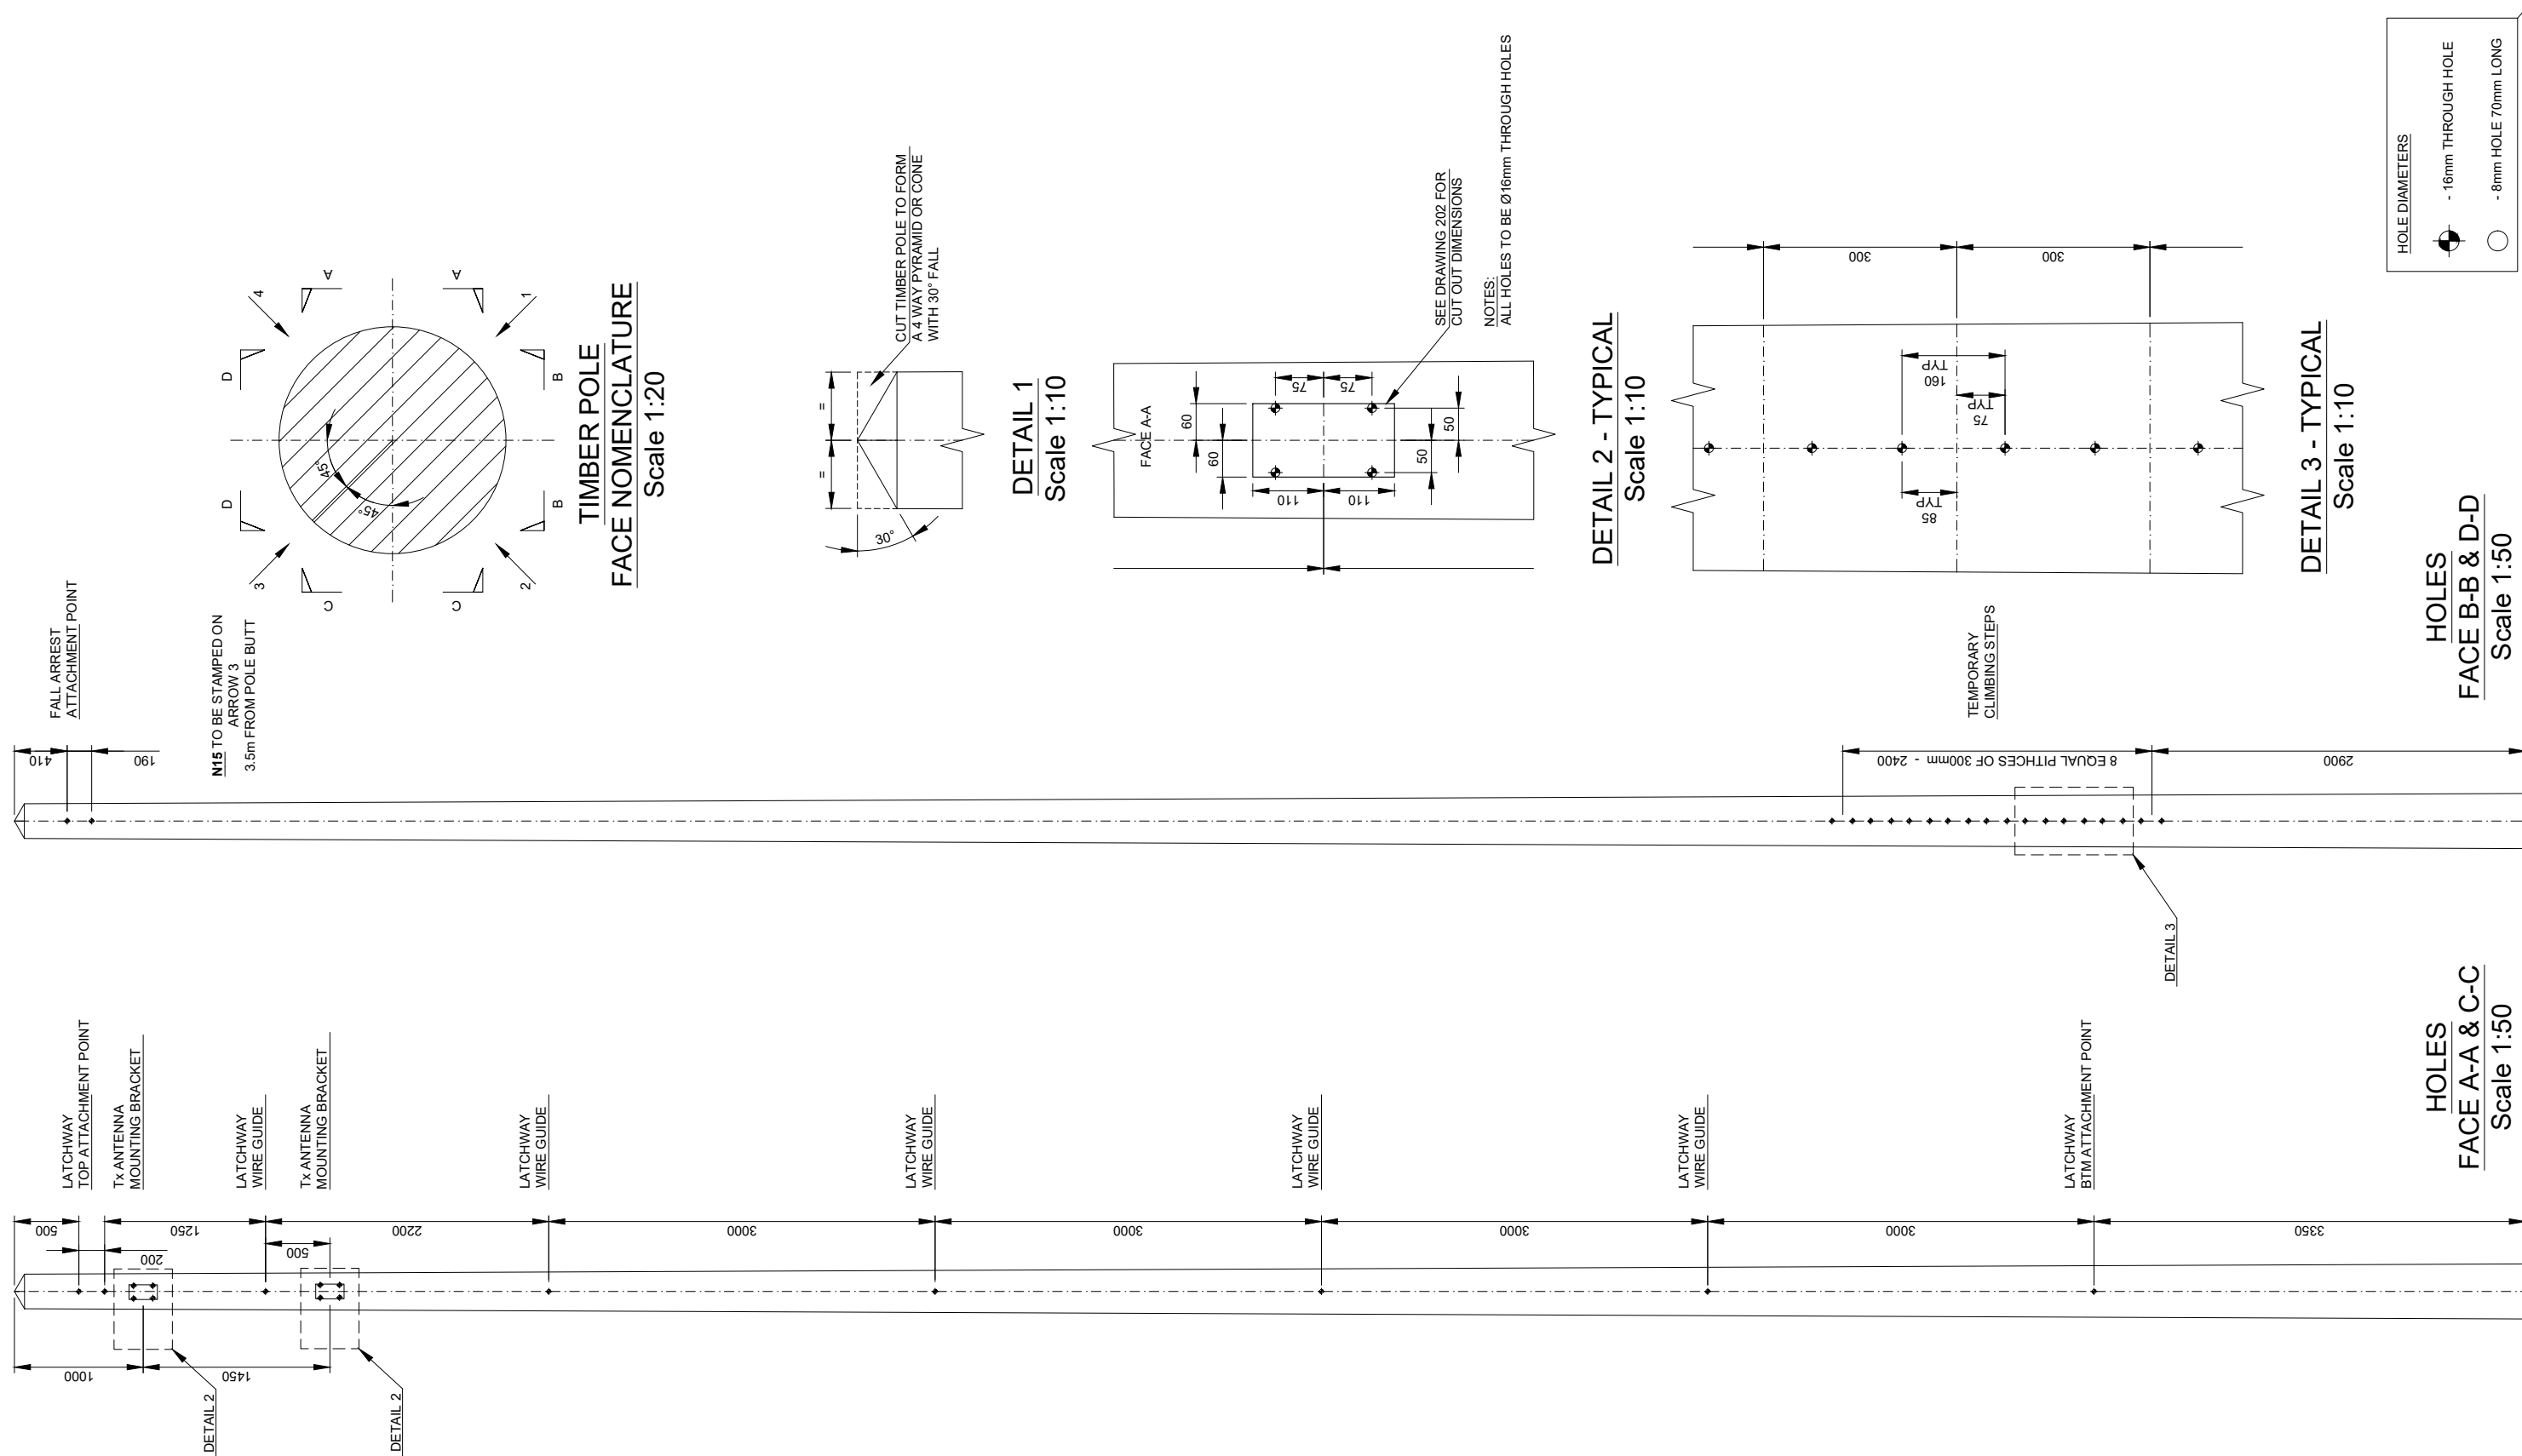REV
01

ALL SCALES AS SHOWN WHEN PRINTED AT A3	0cm	1cm	2cm	3cm	4cm	5cm	6cm	7cm	8cm	9cm	10cm
--	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

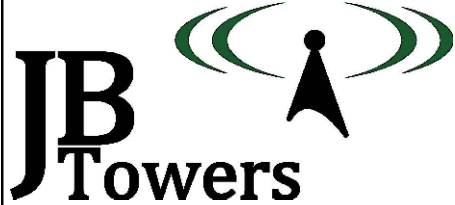

01	FIRST ISSUE			AM	21/08/19
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AM	CHECKED	MP
WHEN PRINTED AT A3		DATE	21/08/19	DATE	21/08/19
		APPROVED	JBT	DATE	21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE

BRAEMAR

TIMBER POLE HOLE SET OUT
SHEET 2 OF 2


SITE ADDRESS

MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ


ARQIVA REF.
140242

DRG No.
201

REV
01

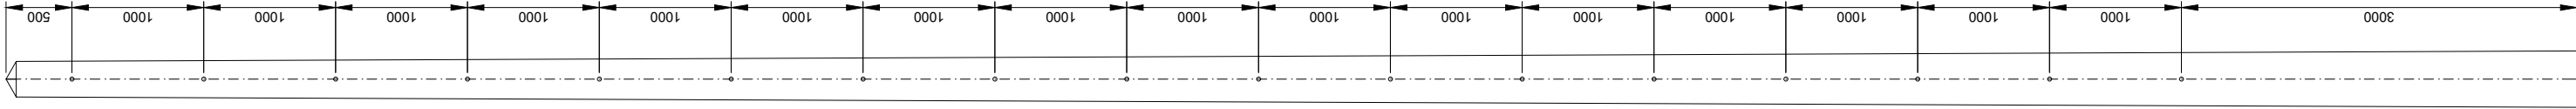

N15 TO BE STAMPED ON
ARROW 3
3.5m FROM POLE BUTT

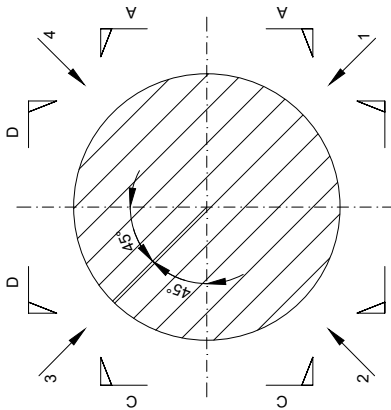

TIMBER POLE
FACE NOMENCLATURE
Scale 1:20

FEEDER BRACKETS

ALL HOLES ON ARROW 1
TO BE Ø8mm & 70mm LONG

HOLES
ARROW 1
Scale 1:50




ALL SCALES AS SHOWN WHEN PRINTED AT A3


ALL SCALES AS SHOWN WHEN PRINTED AT A3

01	FIRST ISSUE					AM	21/08/19
REV	REV					BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN	AM	CHECKED	MP	APPROVED	JBT
		DATE	21/08/19	DATE	21/08/19	DATE	21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.							

TITLE
BRAEMAR
TIMBER POLE CUT OUT
DETAIL


SITE ADDRESS
MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

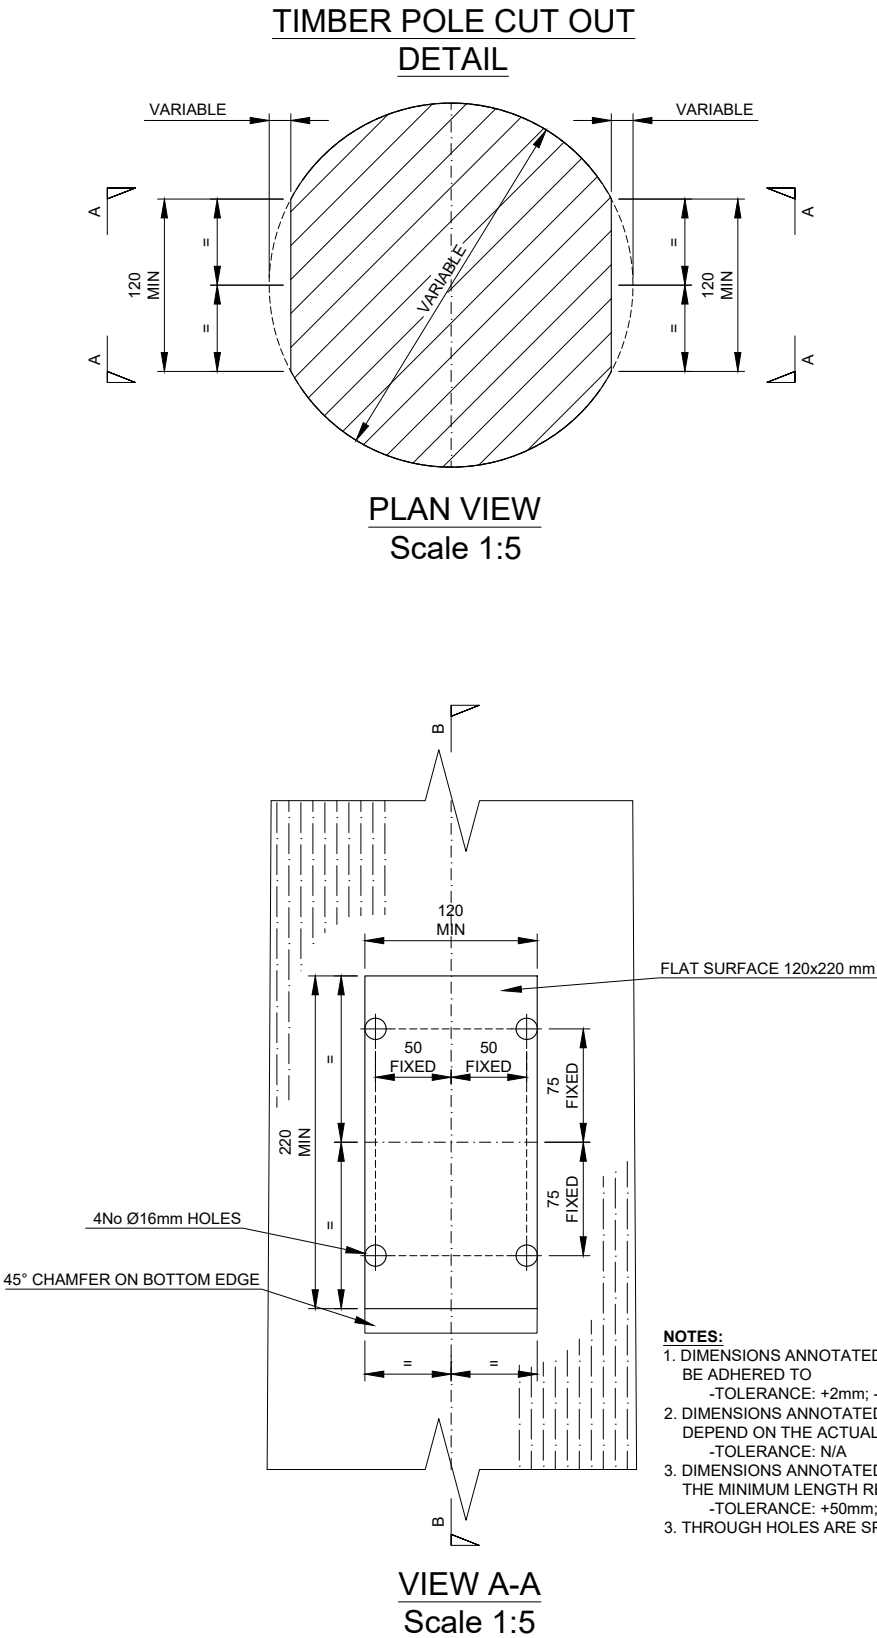

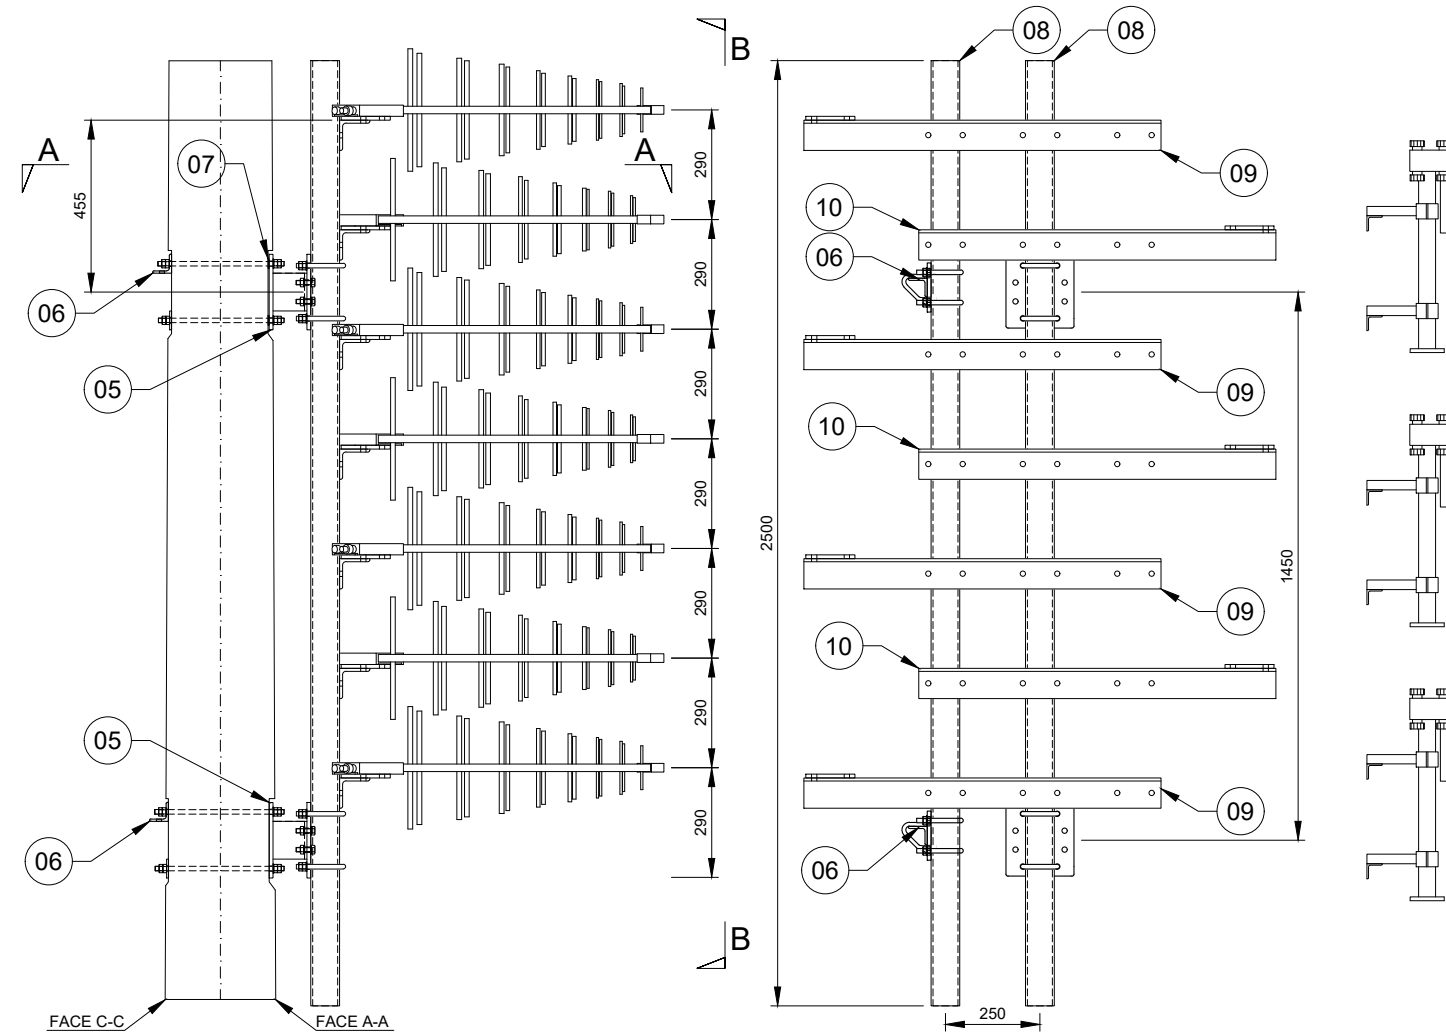


DETAIL G - Tx ANTENNA MOUNT
SCALE 1:20

VIEW B-B
Scale 1:20

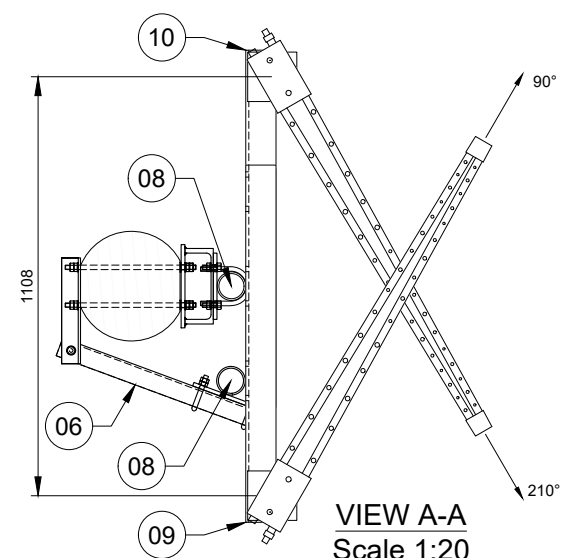


VIEW A-A
Scale 1:20

POSITION OF POWER
DIVIDERS
TO BE DETERMINED
ON SITE



ALL SCALES AS SHOWN WHEN PRINTED AT A3

ALL SCALES AS SHOWN WHEN PRINTED AT A3

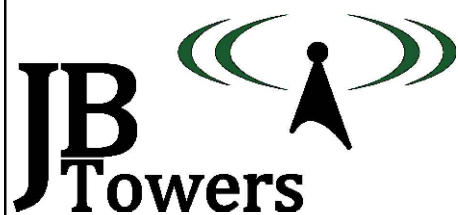

01	FIRST ISSUE	AM	21/08/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN AM DATE 21/08/19	CHECKED MP DATE 21/08/19	APPROVED JBT DATE 21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			


TITLE
Tx ANTENNA MOUNT
DETAIL G

SITE ADDRESS
MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ


ARQIVA REF.
140242

DRG No.
203

REV
01

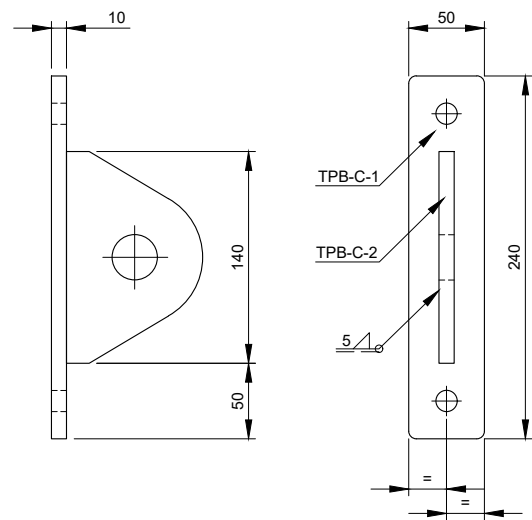

PART TPB-C
Scale 1:5

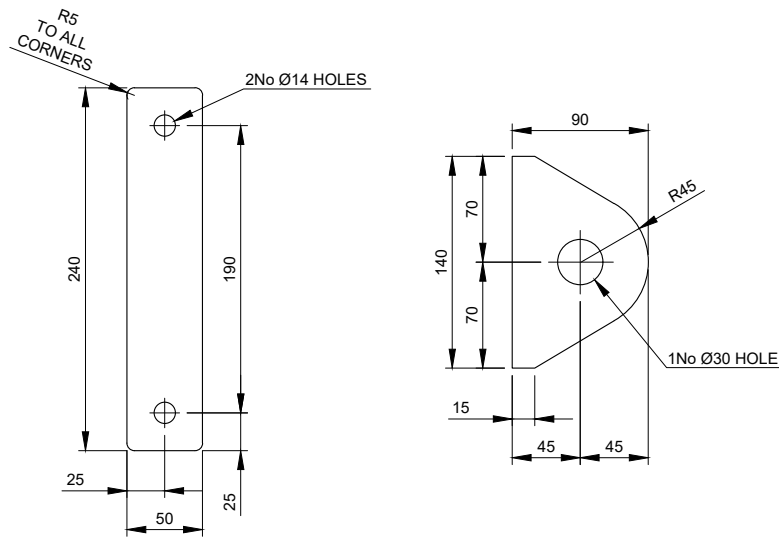


TPB-C-1 - 10mm THICK
Scale 1:5

TPB-C-2 - 10mm THICK
Scale 1:5


Parts list for TPB-C

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-C-1	1	Plate 240x50x10mm	N/A	S275J0	0.94 kg
02	TPB-C-2	1	Plate 140x90x10mm	N/A	S275J0	0.99 kg
03	STUDS	1	M12 STUDDING	350mm	GRADE 8.8	0.31 kg
Total Weight:						2.24 kg

- All steel hot dip galvanized
- Each STUD to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrication notes see drawing 304



SLOTTED HOLE DETAIL
Scale 1:2

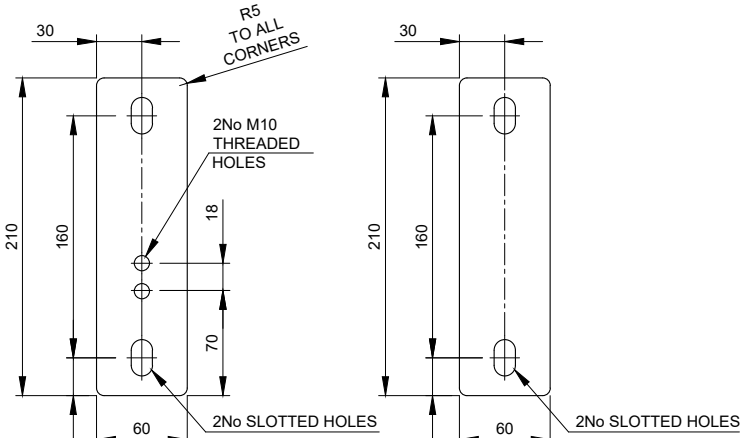


PART TPS-R-1
Scale 1:5

PART TPS-R-2
Scale 1:5

Parts list for TPS-R

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPS-R-1	1	Plate 210x60x15mm	N/A	S275J0	1.48 kg
02	TPS-R-2	1	Plate 210x60x5mm	N/A	S275J0	0.49 kg
03	STUDS	2	M12 STUDDING	500mm	GRADE 8.8	0.44 kg
04	NUT-S	2	M12 SHALLOW NUT	N/A	GRADE 8.8	-
05	NUT	4	M12 NUT	N/A	GRADE 8.8	-
06	WSH	4	M12 WASHER	N/A	GRADE 8.8	-
Total Weight:						2.41 kg

- All steel hot dip galvanized
- For fabrication notes see drawing 304

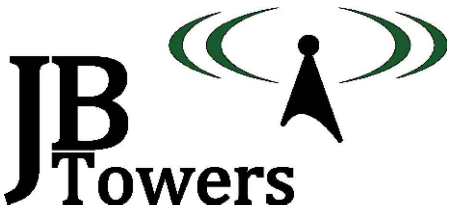

01	FIRST ISSUE	AM	21/08/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 21/08/19	CHECKED DATE 21/08/19	APPROVED DATE 21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
ATTACHMENT POINT &
TEMPORARY STEP DETAILS
PARTS: TPB-C; TPS-R




SITE ADDRESS
MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF.
140242
DRG No.
300
REV
01




ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

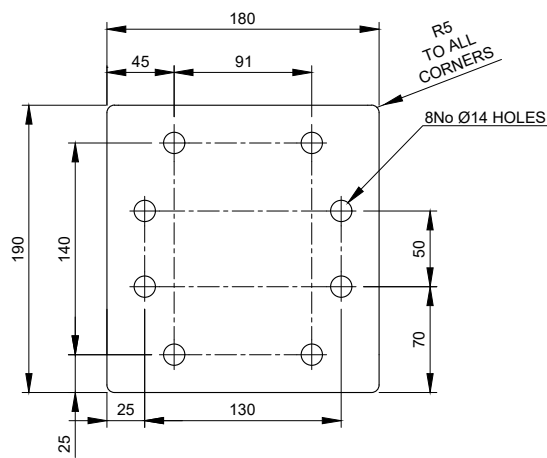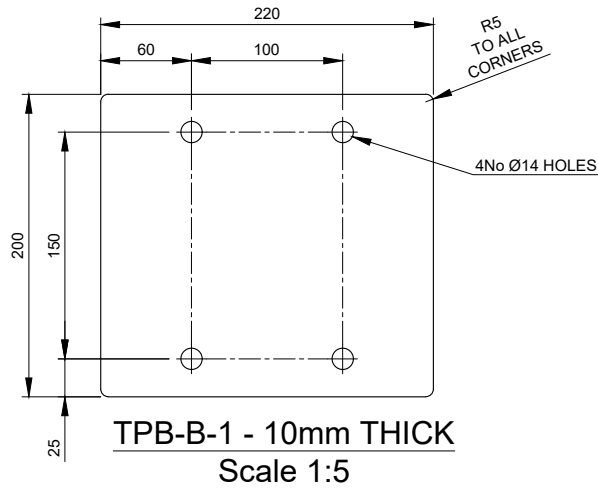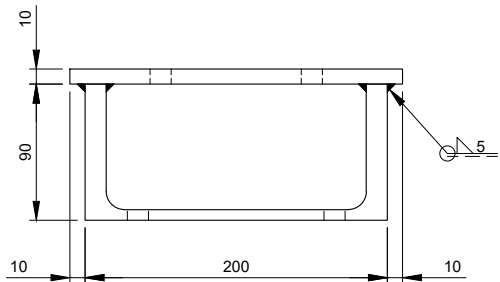

TPB-B-5 - 10mm THICK
Scale 1:5

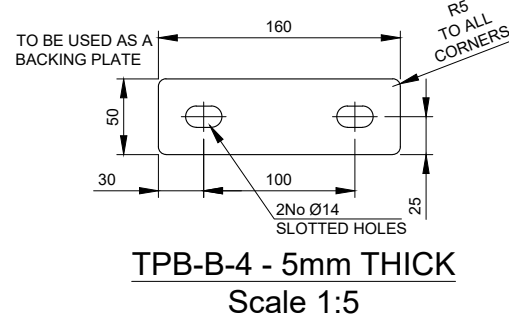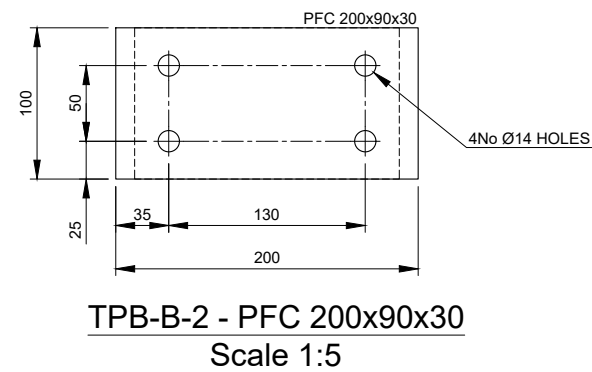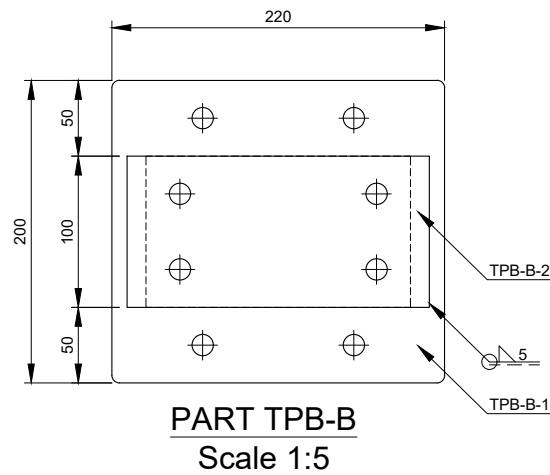

TPB-B-4 - 5mm THICK
Scale 1:5

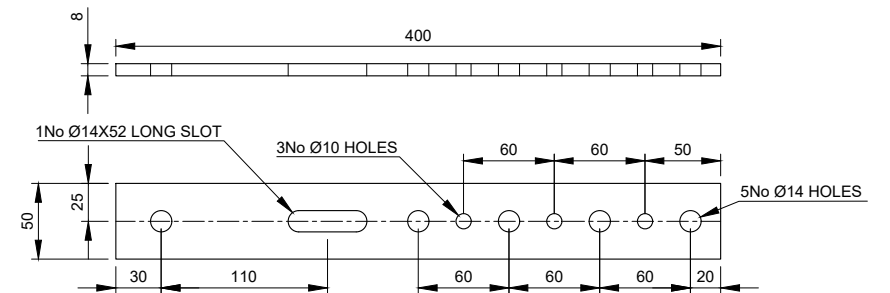


TPA-PD - 8mm THICK
Scale 1:5

Parts list for TPB-B

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-B-1	1	Plate 220x200x10mm	N/A	S275J0	3.45 kg
02	TPB-B-2	1	PFC 200x90x30	100mm	S275J0	3.00 kg
03	TPB-B-4	2	Plate 160x50x5mm	N/A	S275J0	0.31 kg
04	TPB-B-5	1	Plate 190x180x10mm	N/A	S275J0	2.70 kg
05	STUDS	4	M12 STUDDING	400mm	GRADE 8.8	0.35 kg
06	BOLT	4	M12 45mm LONG (2D+6)	45mm	GRADE 8.8	-
07	U-BOLT	2	M12 U-BOLT FOR CHS 76.1	N/A	GRADE 8.8	-
Total Weight:						11.17 kg

- All steel hot dip galvanized
- Each STUD & U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E Flat Washer and 1 Spring Washer
- For fabrication notes see drawing 304




SLOTTED HOLE DETAIL
Scale 1:2

Parts list for TPA-PD

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPA-PD	1	Plate 400x50x8mm	N/A	S275J0	1.26 kg
02	U-BOLT	1	M12 U-BOLT FOR CHS 76.1mm	N/A	GRADE 8.8	-
Total Weight:						1.26 kg

- All steel hot dip galvanized
- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrication notes see drawing 304

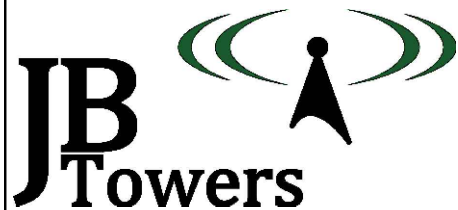

01	FIRST ISSUE	AM	21/08/19
REV	REV	BY	DATE
SCALE AS SHOWN	DRAWN	CHECKED	APPROVED
WHEN PRINTED AT A3	AM	MP	JBT
DATE 21/08/19	DATE 21/08/19	DATE 21/08/19	DATE 21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE

STEELWORK BRACKET,
POWER DIVIDER STRAP

PARTS: TPB-B; TPA-PD

SITE ADDRESS

MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF.
140242


DRG No.
301

REV
01


ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

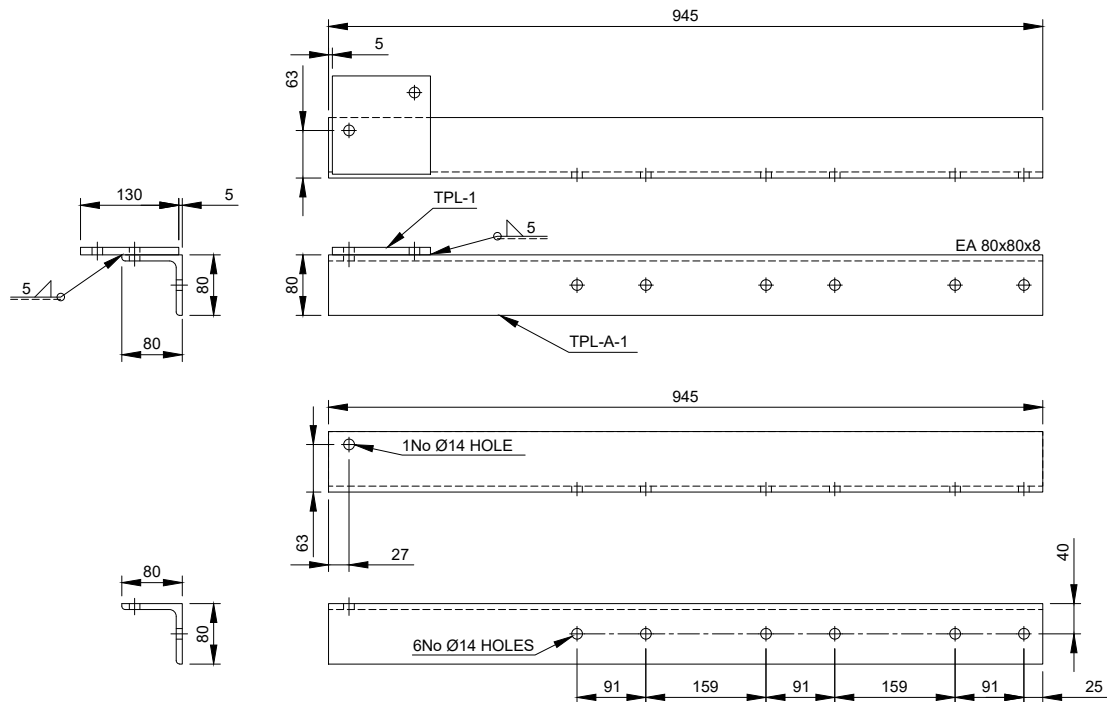

TPL-A-1 - EA 80x80x8
Scale 1:10

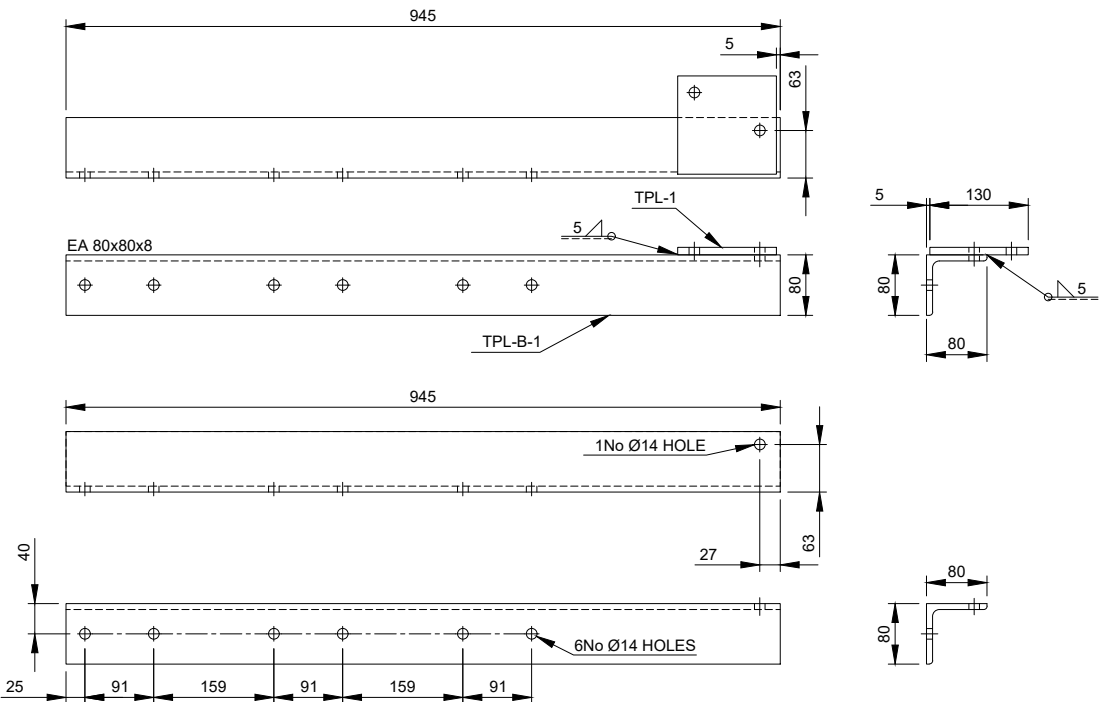

TPL-B-1 - EA 80x80x8
Scale 1:10

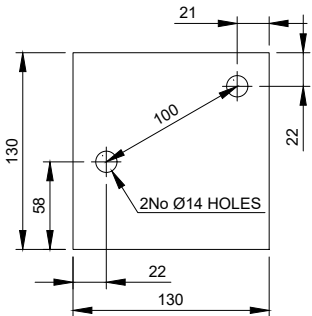

TPL-1 - 10mm THICK
Scale 1:5

Parts list for TPL-A

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPL-A-1	1	EA 80x80x8	945mm	S275J0	9.10 kg
02	TPL-1	1	Plate 130x130x10mm	N/A	S275J0	1.40 kg
03	U-BOLT	3	M12 U-BOLT FOR CHS 76.1mm	N/A	GRADE 8.8	-

- All steel hot dip galvanized

- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers

- For fabrication notes see drawing 304

Total Weight: 10.50 kg

Parts list for TPL-B


Item	Part	Quantity	Part description	Length	Material	Weight
01	TPL-B-1	1	EA 80x80x8	945mm	S275J0	9.10 kg
02	TPL-1	1	Plate 130x130x10mm	N/A	S275J0	1.40 kg
03	U-BOLT	3	M12 U-BOLT FOR CHS 76.1mm	N/A	GRADE 8.8	-

- All steel hot dip galvanized

- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers

- For fabrication notes see drawing 304

Total Weight: 10.50 kg

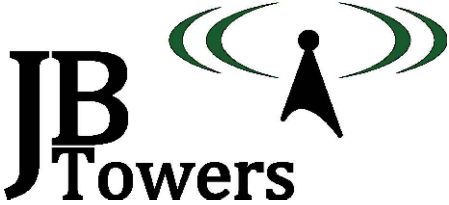

01	FIRST ISSUE	AM	21/08/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 21/08/19	CHECKED DATE 21/08/19	APPROVED DATE 21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
LOG MOUNTS
PARTS: TPL-A; TPL-B

SITE ADDRESS
MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF.
140242


DRG No.
302

REV
01


ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

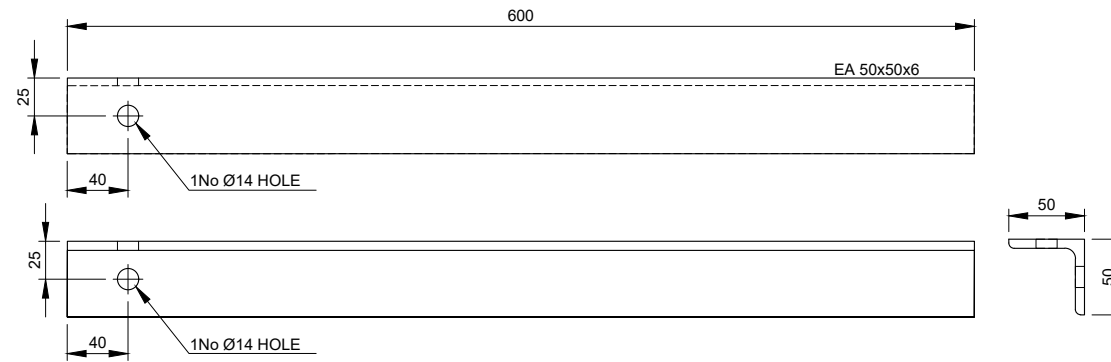

TPB-BR-1 - EA50x50x6
Scale 1:5

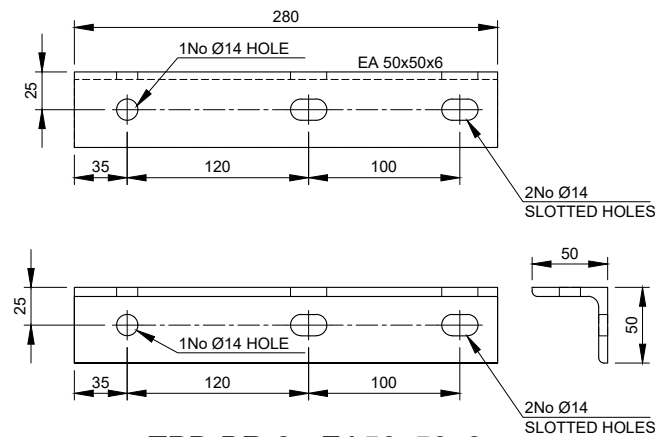

TPB-BR-2 - EA50x50x6
Scale 1:5

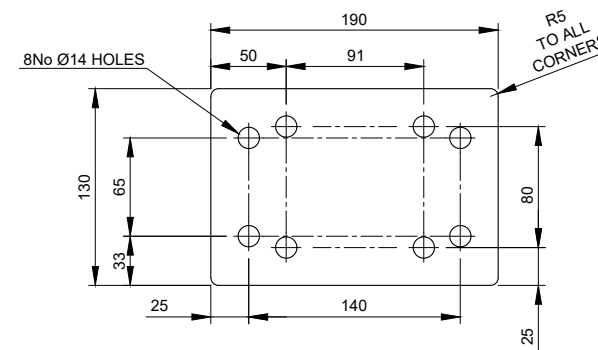


TPB-BR-3 - 10mm THICK
Scale 1:5

Parts list for TPB-BR


Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-BR-1	1	EA 50x50x6	280mm	S275J0	1.25 kg
02	TPB-BR-2	1	EA 50x50x6	600mm	S275J0	2.70 kg
03	TPB-BR-3	1	Plate 130x190x10mm	N/A	S275J0	1.94 kg
04	BOLT	1	M12 SET BOLT - 30mm LONG	N/A	GRADE 8.8	-
05	N-BOLT	2	M12 N-BOLT FOR EA 50x50x6	N/A	GRADE 8.8	-
06	U-BOLT	2	M12 U-BOLT FOR CHS 76.1mm	N/A	GRADE 8.8	-

Total Weight: 5.89 kg

- All steel hot dip galvanized
- Each BOLT to be supplied with 1 Full Nut, 1 Form E FLat Washer and 1 Spring Washer
- Each STUD & U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrication notes see drawing 304

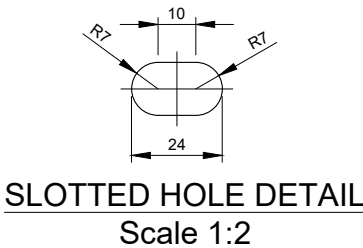

SLOTTED HOLE DETAIL
Scale 1:2

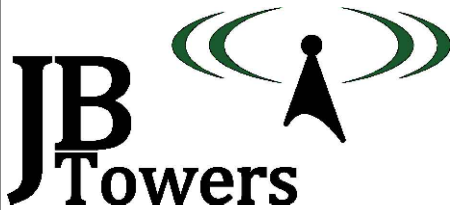

01	FIRST ISSUE	AM	21/08/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 21/08/19	CHECKED DATE 21/08/19	APPROVED DATE 21/08/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
BRACING ARM
PART: TPA-BR

SITE ADDRESS
MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF.
140242

DRG No.
303

REV
01

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

Item	Part	Drawing	Quantity	Part description	Length	Material	Weight
01	01	200	1	3 MAN LATCHWAY SYSTEM & 5No. WIRE GUIDES FOR FACE MOUNTED MONOPOLE	17000	N/A	-
02	TPB-C	300	2	FALL ARREST ATTACHMENT POINT	N/A	S275J0	4.48 kg
03	03	200	46	PERMANENT BT STEP c/w 3No 10x75mm ZINC-PLATED COACH SCREWS	N/A	S275J0	13.80 kg
04	TPS-R	300	9	'MonoStep' ASSEMBLY	N/A	S275J0	21.69 kg
05	TPB-B	301	2	MOUNTING BRACKET	N/A	S275J0	22.34 kg
06	TPB-BR	303	2	BRACING KIT	N/A	S275J0	11.78 kg
07	07	203	12	M12 WASHER	N/A	GRADE 8.8	-
08	08	203	2	CHS 76.1x5mm	2500mm	S355J2H	43.85 kg
09	TPL-B	302	4	LOG MOUNTING BRACKET	945mm	S275J0H	42.00 kg
10	TPL-A	301	3	LOG MOUNTING BRACKET	945mm	S275J0H	31.50 kg
11	TPA-PD	301	6	POWER DIVIDER STRAP	400mm	S275J0H	7.56 kg
13	13	200	1	FEEDER COVER - 2/CG/100	3500mm	UV RESISTANT PLASTIC	-
14	14	200	17	FEEDER CLAMP - 2/FCD/028	N/A	POLYPROPYLENE	-
15	15	200	17	M10 SCREW DOWELS WTH M10 NUT	100mm	STAINLESS STEEL	-
16	16	200	1	PoleSaver	750mm	N/A	-
17	17	200	8	M12 STUD + 4No NUTS + 2No FLAT WASHERS + 1No Ø50mm WASHER (FOR FALL ARREST SYSTEM)	500mm	GRADE 8.8	3.56 kg
Total Weight:							202.56 kg

- All steel hot dip galvanized
- All U-BOLTS to be FLA supply, each Supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers

NOTES:

1. WELDING TO BE IN ACCORDANCE WITH BS EN 1011-1:2009
2. LINEAR DIMS TO BE WITHIN ±1mm;
3. ANGULAR TOLERANCES TO BE WITHIN 0.5°
4. WELDING SYMBOLS ARE IN ACCORDANCE WITH BS EN 22553:1995
5. ALL PROFILE EDGES TO BE DRESSED AND SHARP CORNERS REMOVED
6. ALL WELD SIZES ARE FINAL SIZES
7. ALL WELDED JOINTS ARE TO BE PICKLE TIGHT
8. ALL STEELWORK TO BE BS EN 10025 GRADE S275 J0 UNO &
9. HOT DIPPED GALVANISED TO BS EN ISO 1461. (ALL HOLLOW SECTIONS TO BE GRADE S355 J0H)
10. ALL STEEL IS TO BE SUPPLIED IN ACCORDANCE WITH EN 1090 TO EXECUTION CLASS 2
11. ALL NON PRE-LOADED BOLTS TO BE COMPLIANT STRUCTURAL BOLTS TO BS EN ISO 15048 PARTS 1&2.
12. STEELWORK COMPONENTS SHALL BE HOT DIP GALVANISED TO ACHIEVE A "VERY HIGH" DURABILITY FOR AN ENVIRONMENT CATEGORY CODE C4 FROM TABLE 1 IN BS EN ISO 14713
13. BOLTS AND NUTS SHALL BE SUPPLIED IN ACCORDANCE WITH BS 7371, SPUN GALVANISED IN ACCORDANCE WITH ISO 10684, THE NUTS RE-TAPPED AFTER GALVANISING, AND THE THREADS TREATED WITH GREASE.
14. ALL BOLTS TO BE CUT ON SITE TO EXTEND MAX 10mm BEYOND THE NUT WHEN TIGHTENED UNO.
15. ALL SITE DRILLED HOLE/CUT ENDS TO BE TREATED WITH METAFLUX 70-40 ZINC PASTE FOLLOWED BY 1 COAT OF 7-42 ZINC ALU OR 70-16 ALUMINIUM SPRAY

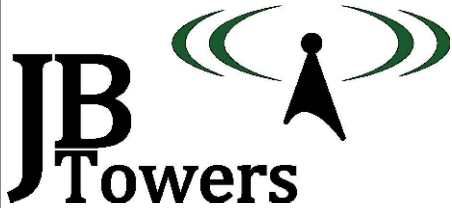

01	FIRST ISSUE			AM	21/08/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AM DATE 21/08/19	CHECKED MP DATE 21/08/19	APPROVED JBT DATE 21/08/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE

PARTS LIST

SITE ADDRESS

MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF.
140242



DRG No.
304

REV
01



ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

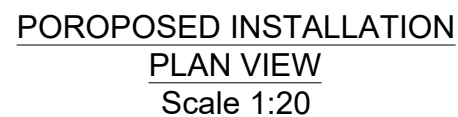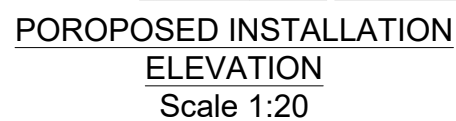

1. REFER TO DRG 200 FOR TIMBER POLE ORIENTATION.
2. APPROX 1.2m SQ SITE MIXED CONCRETE SLAB TO BE INSTALLED AGAINST ROCK TO 50mm BGL. TO FORM A DRILLING PLATFORM TO DIAMOND DRILL A SERIES OF HOLES TO CREATE ORIFICE FOR TIMBER POLE.
3. POLE TO BE WRAPPED IN 'POLESAVER' AND INSTALLED AND LEVELED IN OPENING. TIMBERS TO BE USED TO HOLD POLE IN POSITION.
4. ANNULUS SHALL BE FILLED WITH GROUT / AGGREGATE MIX TO 300mm BELOW GL
5. TOP 300mm SHALL BE FILLED WITH NON-SHRINK GROUT. A 1:60 FALL SHALL BE FORMED AROUND TIMBER POLE TO ALLOW WATER TO DRAIN AWAY FROM POLE
6. GROUT TO EXTEND APPROX 75MM ABOVE TOP OF CONCRETE
7. ONCE GROUT HAS CURED REMOVE TIMBER WEDGES AND FILL REMAINING VOIDS WITH NON-SHRINK GROUT
8. BACKFILL TOP OF CONCRETE SLAB WITH 200mm OF SOIL

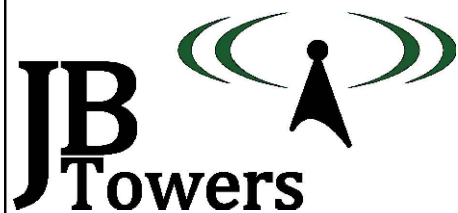

argiva

01	FIRST ISSUE			AM	21/08/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AM DATE 21/08/19	CHECKED MP DATE 21/08/19	APPROVED JBT DATE 21/08/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE

FOUNDATION DETAILS

SITE ADDRESS

MAR LODGE
BRAEMAR
ABERDEENSHIRE
AB35 5YJ

ARQIVA REF.
140242

DRG No.
400

REV 01



ALL SCALES AS SHOWN WHEN PRINTED AT A3