



DRAWING ISSUE SHEET

[illegible]

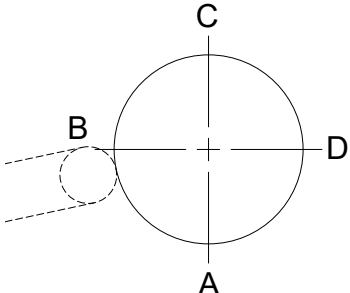

HOOKS LANE

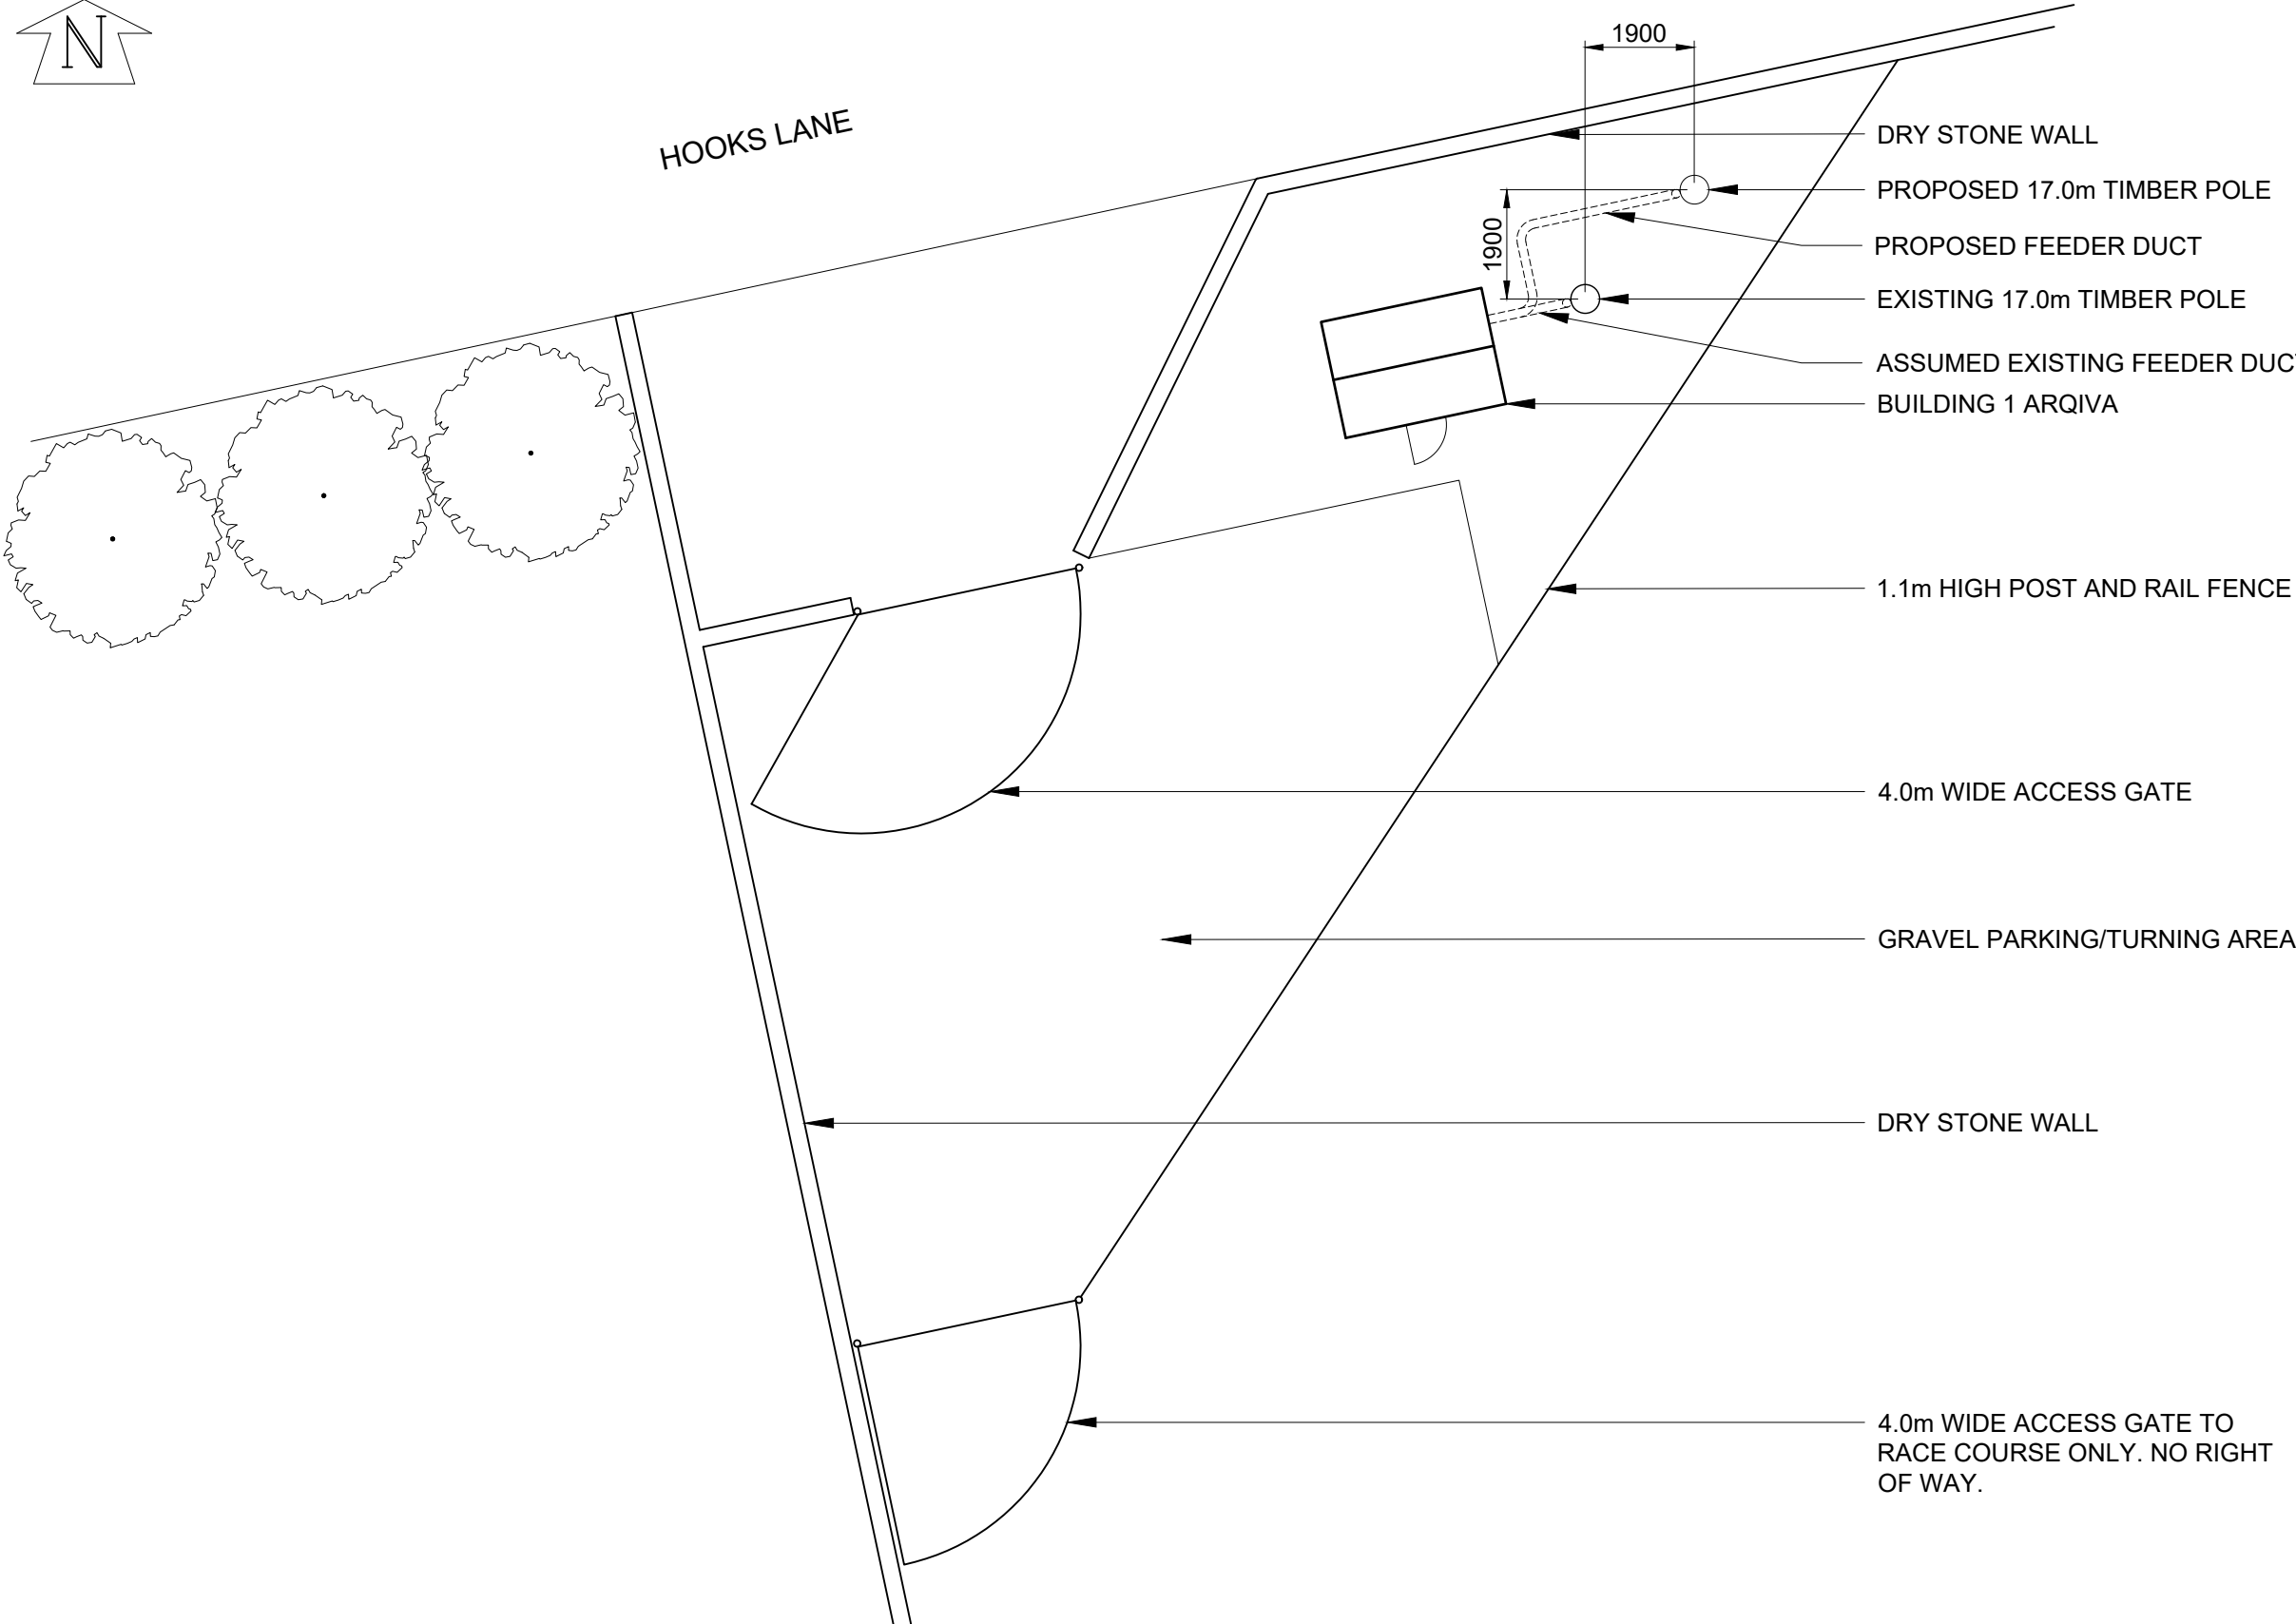


NOTES:
CLIMBING FACE - FACE C
STEP PEGS ON FACES B & D

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

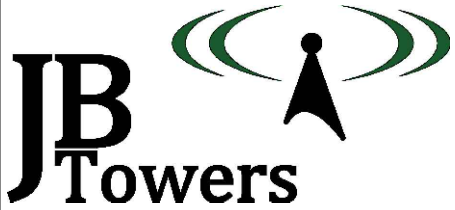


01	FIRST ISSUE			AL	03/04/19
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AL	CHECKED	MP
WHEN PRINTED AT A3		DATE	03/04/19	DATE	03/04/19
APPROVED		JBT			
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED.		THIS DRAWING TO BE READ IN CONJUNCTION WITH			
OTHER RELEVANT DRAWINGS.					

TITLE
CARTMEL
SITE PLAN

SITE ADDRESS
ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF. 140348
DRG No. 100
REV 01

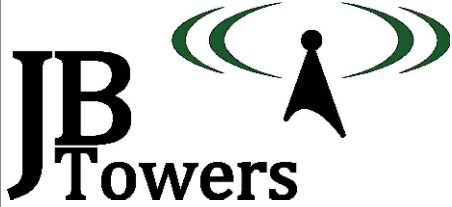

02	FOUNDATION ADJUSTED			AL	09/04/19
01	FIRST ISSUE			AL	03/04/19
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AL	CHECKED	MP
WHEN PRINTED AT A3		DATE	03/04/19	DATE	03/04/19
		APPROVED	JBT	DATE	03/04/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					



TITLE

CARTMEL

GENERAL ARRANGEMENT

SHEET 1 OF 3

SITE ADDRESS		
ARQIVA SITE GRANGE OVER SANDS CUMBRIA LA11 6QF		
ARQIVA REF. 140348	DRG No. 200	REV 02

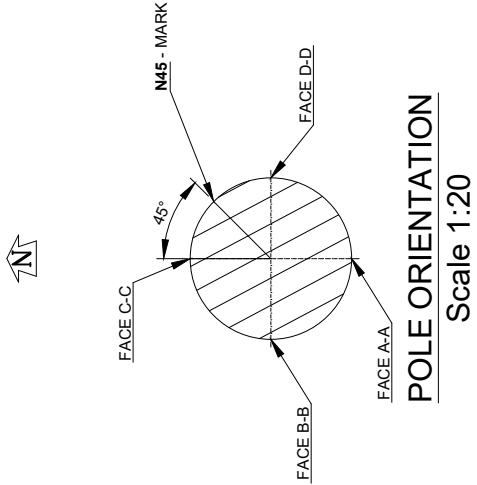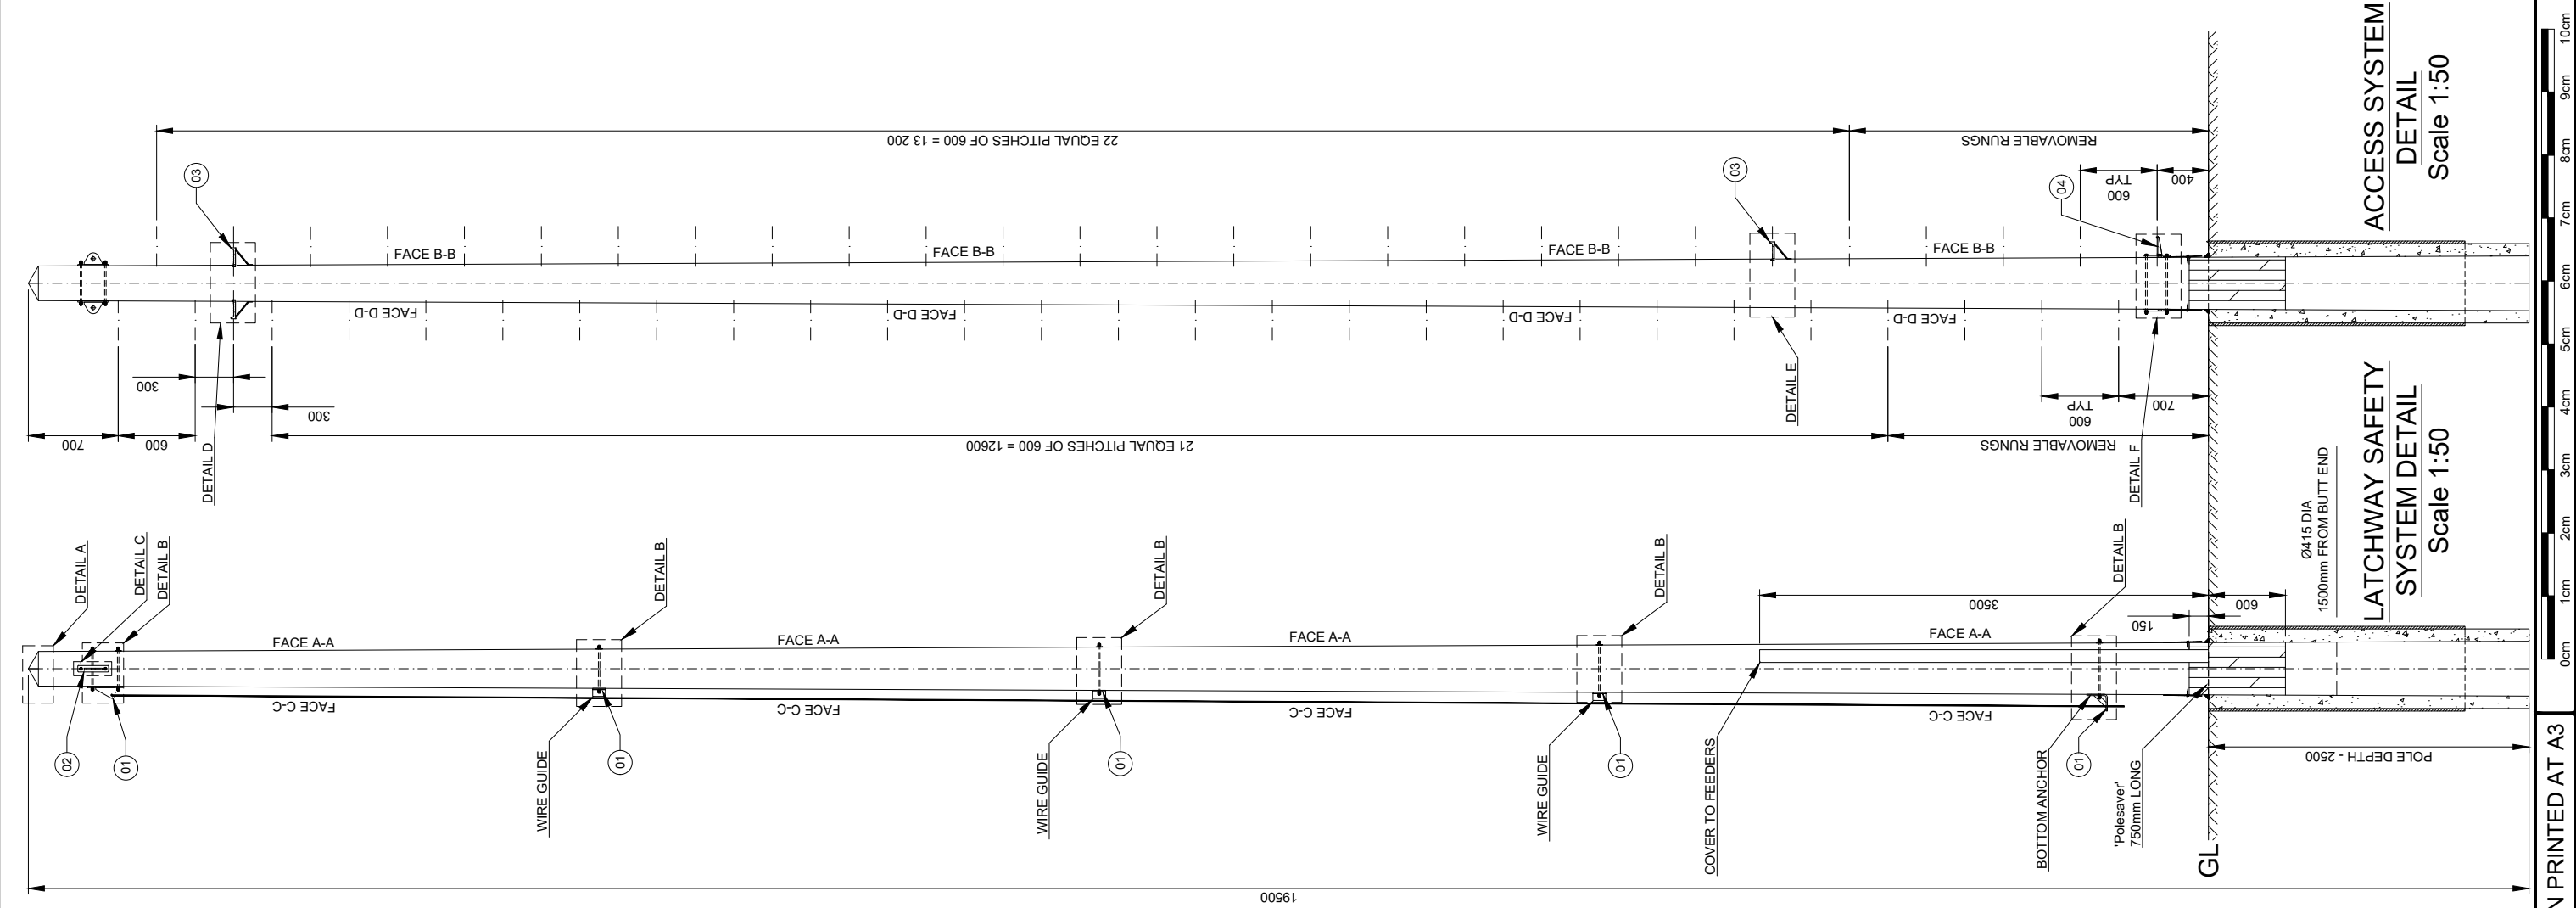

NOTES

- SEE DRAWING 306 FOR PARTS LIST
- ALL BOLTS TO BE CUT ON SITE TO EXTEND MAX 10mm BEYOND THE NUT WHEN TIGHTENED UNO.
- ALL SITE DRILLED HOLE/CUT ENDS TO BE TREATED WITH METAFUX 70-40 ZINC PASTE FOLLOWED BY 1 COAT OF 7-42 ZINC ALU OR 70-16 ALUMINIUM SPRAY

TIMBER POLE

- POLE TO BE SUPPLIED IN ACCORDANCE WITH BS EN14229 & SHALL HAVE MIN. CHARACTERISTIC BENDING STRENGTH OF 30N/mm2 & MIN. YOUNGS MODULUS (PARALLEL TO GRAIN) OF 10KN/mm2.
- MARKINGS ON FINISHED POLE SHALL BE AT 4m FROM BUTT AND COMPLY WITH BS EN 14229 UNO
- AS FAR AS PRACTICABLE ALL CUTTING, SCARFING & DRILLING TO BE DONE BEFORE CREOSOTING. IF NOT ALL CUT, DRILLED & SCARFED SURFACES TO BE COATED WITH A MIXTURE OF CREOSOTE & TAR.
- POLE TO BE PRESSURE IMPREGNATED WITH CREOSOTE IN ACCORDANCE WITH BS EN 14229
- MINIMUM DIAMETERS
TOP - Ø205mm
BOTTOM - Ø430mm
- 19.5m LONG POLE TO BE SOURCED BY TRIMMING 20m LONG POLE BY 0.5m AT THE TOP




PLANTING

- CAT SCANNER IS TO BE USED IN ORDER TO CONFIRM THE POSITIONS OF BURIED SERVICES.
- 'Perma-Soil Stabiliser' OR A SIMILAR APPROVED SHOULD BE USED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATION.
- ANY MATERIAL USED FOR BACK-FILLING IS TO BE OF EQUAL OR BETTER QUALITY THAN THE EXCAVATED MATERIAL.
- ALL BACK-FILLING MATERIAL IS TO BE PLACED AND COMPACTED IN 150mm THICK LAYERS.
- TIMBER POLE TO BE PLANTED WITH N45 MARKING AT 4.0m FROM BUTT FACING 45° FROM NORTH (CLOCKWISE)

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

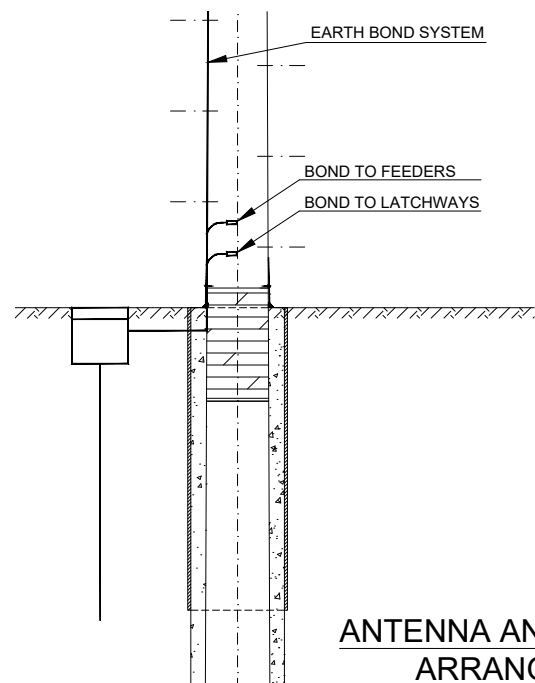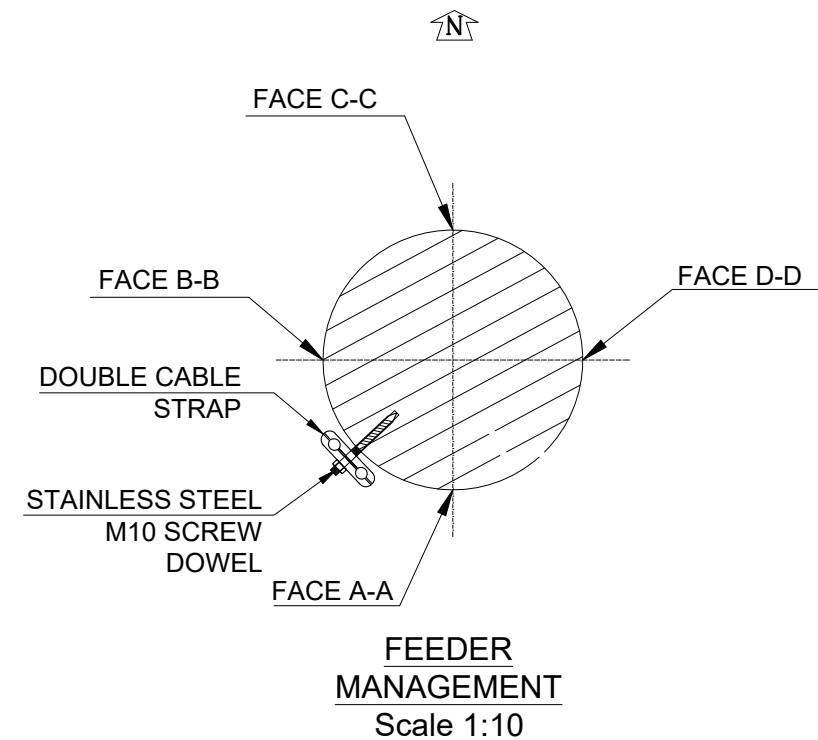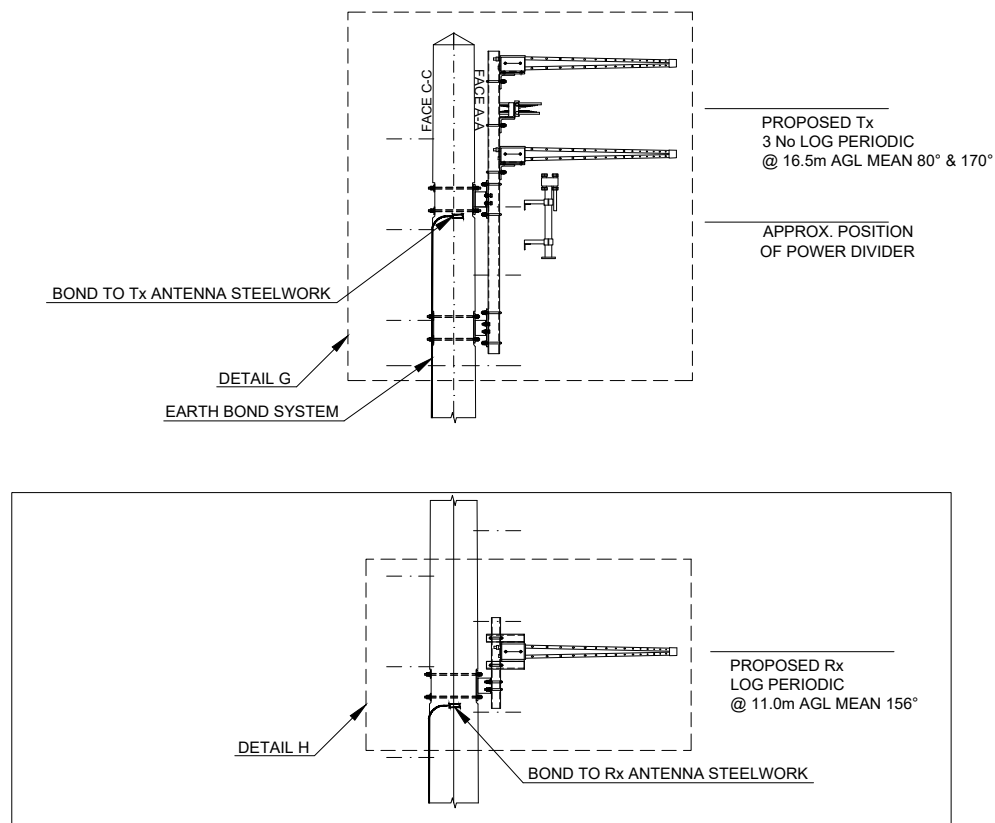

**ANTENNA AND EARTHING
ARRANGEMENT**
Scale 1:50

NOTES


1. AS FAR AS IS PRACTICABLE ALL CUTTING SCARFING AND DRILLING TO BE DONE BEFORE CREOSOTING. WHERE THIS IS NOT POSSIBLE ALL CUT, DRILLED, AND SCARFED SURFACES TO BE COATED WITH A MIXTURE OF CREOSOTE AND TAR

FEEDERS

1. SUPPLY OF FEEDERS BY OTHERS
LCF78-50 TO Tx ANTENNA &
LCF12-50 TO Rx ANTENNA
2. FEEDERS FIXED AT 1000mm CENTRES

EARTHING

1. CONNECT EARTH BOND TO NEW EARTHING SYSTEM
2. MAXIMUM VALUE FOR GROUND RESISTANCE TO BE 10 OHMS
3. CABLE OR TAPE TO BE FIXED TO POLE AT 1000mm CENTRES
4. EARTHING SHOULD COMPLY WITH ARQIVA'S DOCUMENT BOS147

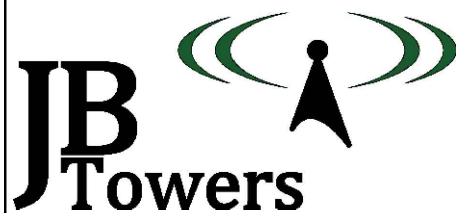

02	ANTENNA ORIENTATION AND FOUNDATION ADJUSTED	AL	09/04/19
01	FIRST ISSUE	AL	03/04/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/04/19	CHECKED DATE 03/04/19	APPROVED DATE 03/04/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
CARTMEL
GENERAL ARRANGEMENT
SHEET 2 OF 3

SITE ADDRESS
ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF.
140348


DRG No.
200

REV
02

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3




- NOTES:
1. A SINGLE COAT OF TIMBER COMPATIBLE BITUMINOUS PAINT (E.G. BIRD BRAND BLACK BITUMINOUS PAINT OR SIMILAR APPROVED PRODUCT) TO BE APPLIED TO THE UPPER SURFACES AT THE TOP OF THE POLE.
 2. PAINT TO BE APPLIED ON SITE JUST BEFORE ERECTION
- FORM: 4 WAY PYRAMID / CONE


DETAIL A - TIMBER POLE TOP
Scale 1:20

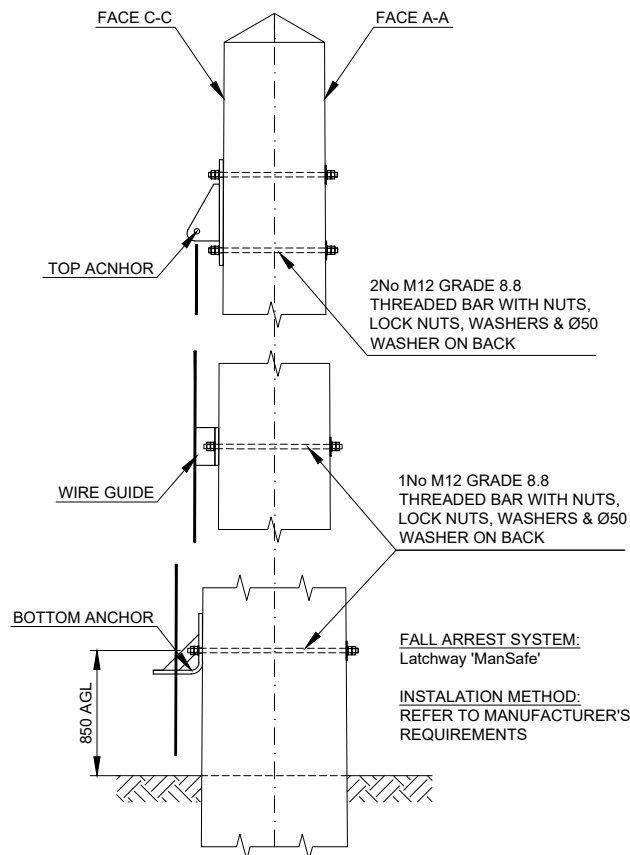


DETAIL B - FALL ARREST SYSTEM
Scale 1:20

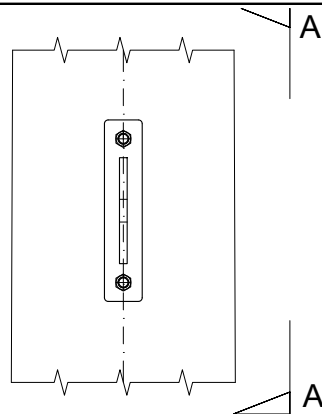

DETAIL C - FALL ARREST
ATTACHMENT POINT
Scale 1:10

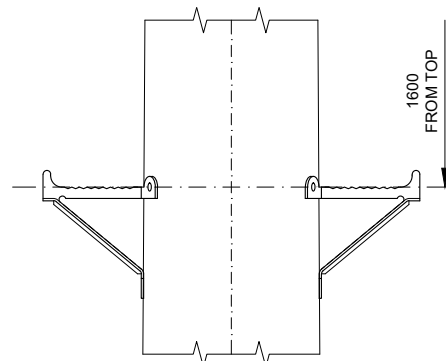


DETAIL D - ANTENNA
ACCESS CLIMBING STEP
Scale 1:10

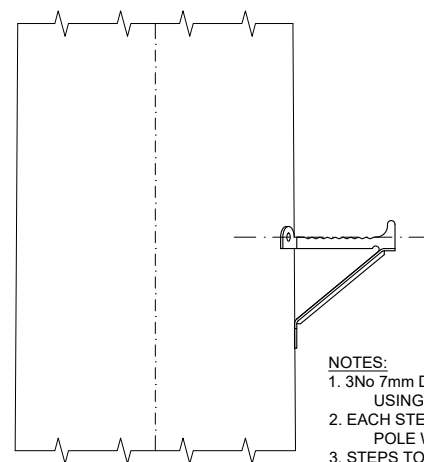


DETAIL E - PERMANENT
CLIMBING STEPS
Scale 1:10


- NOTES:
1. 3No 7mm DIA 70mm LONG PILOT HOLES TO BE DRILLED USING THE STEP AS A TEMPLATE
 2. EACH STEP SHOULD BE FIXED TO THE TIMBER POLE WITH 3No 10mm COACH SCREWS 75mm LONG
 3. STEPS TO BE INSTALLED ON FACES B-B & D-D ONLY

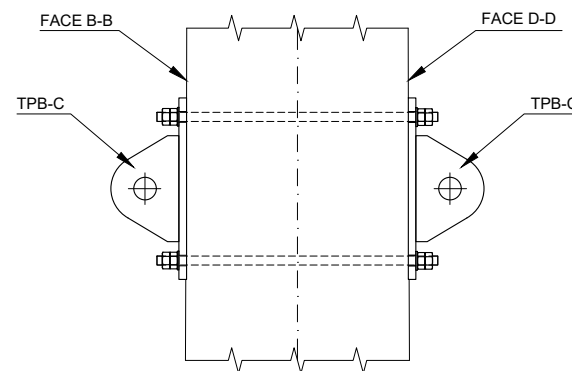

VIEW A-A
Scale 1:10

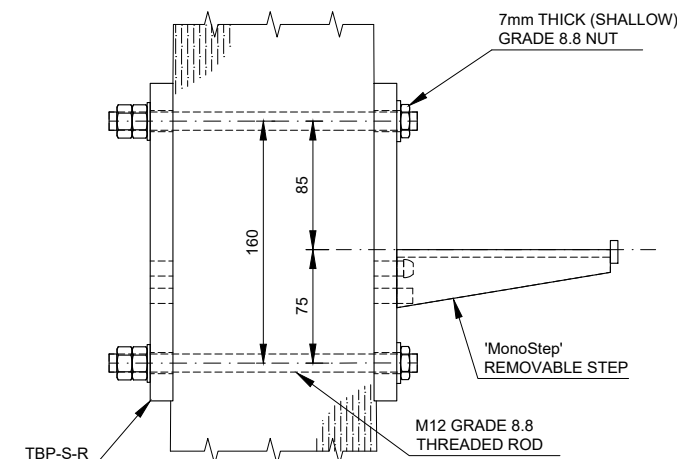

DETAIL F - REMOVABLE
CLIMBING STEPS
Scale 1:5

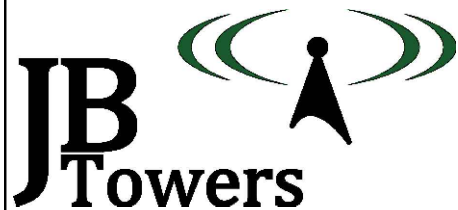

01	FIRST ISSUE	AL	03/04/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN DATE 03/04/19	CHECKED DATE 03/04/19	APPROVED DATE 03/04/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
CARTMEL
GENERAL ARRANGEMENT
SHEET 3 OF 3

SITE ADDRESS
ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF.
140348


DRG No.
200

REV
01

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

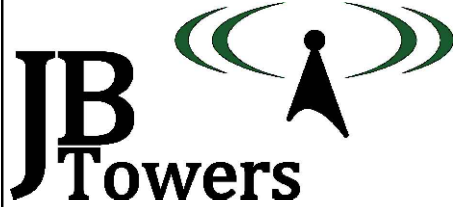

01	FIRST ISSUE			AL	03/04/19
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AL	CHECKED	MP
WHEN PRINTED AT A3		DATE	03/04/19	DATE	03/04/19
		APPROVED		JBT	
		DATE		03/04/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE

CARTMEL

TIMBER POLE HOLE SET OUT

SHEET 1 OF 2

SITE ADDRESS

ARQIVA SITE

GRANGE OVER SANDS

CUMBRIA

LA11 6QF

ARQIVA REF.





140348

DRG No.

201


REV

01

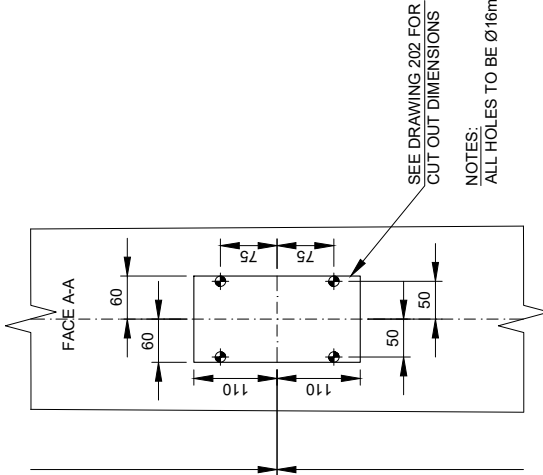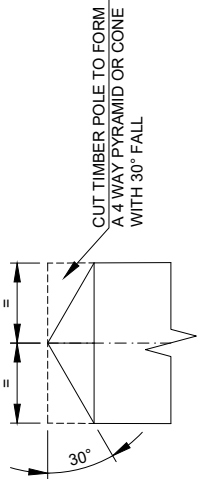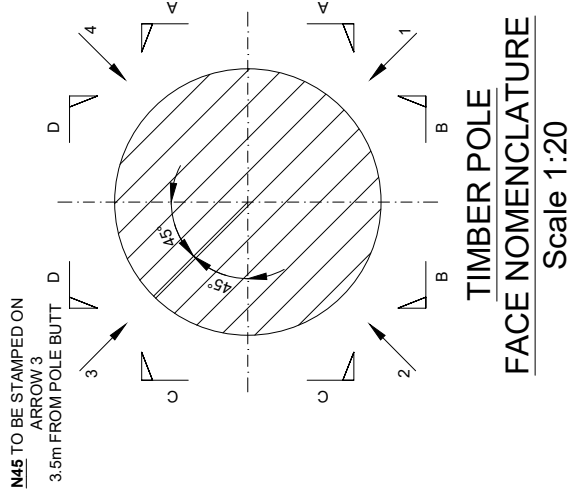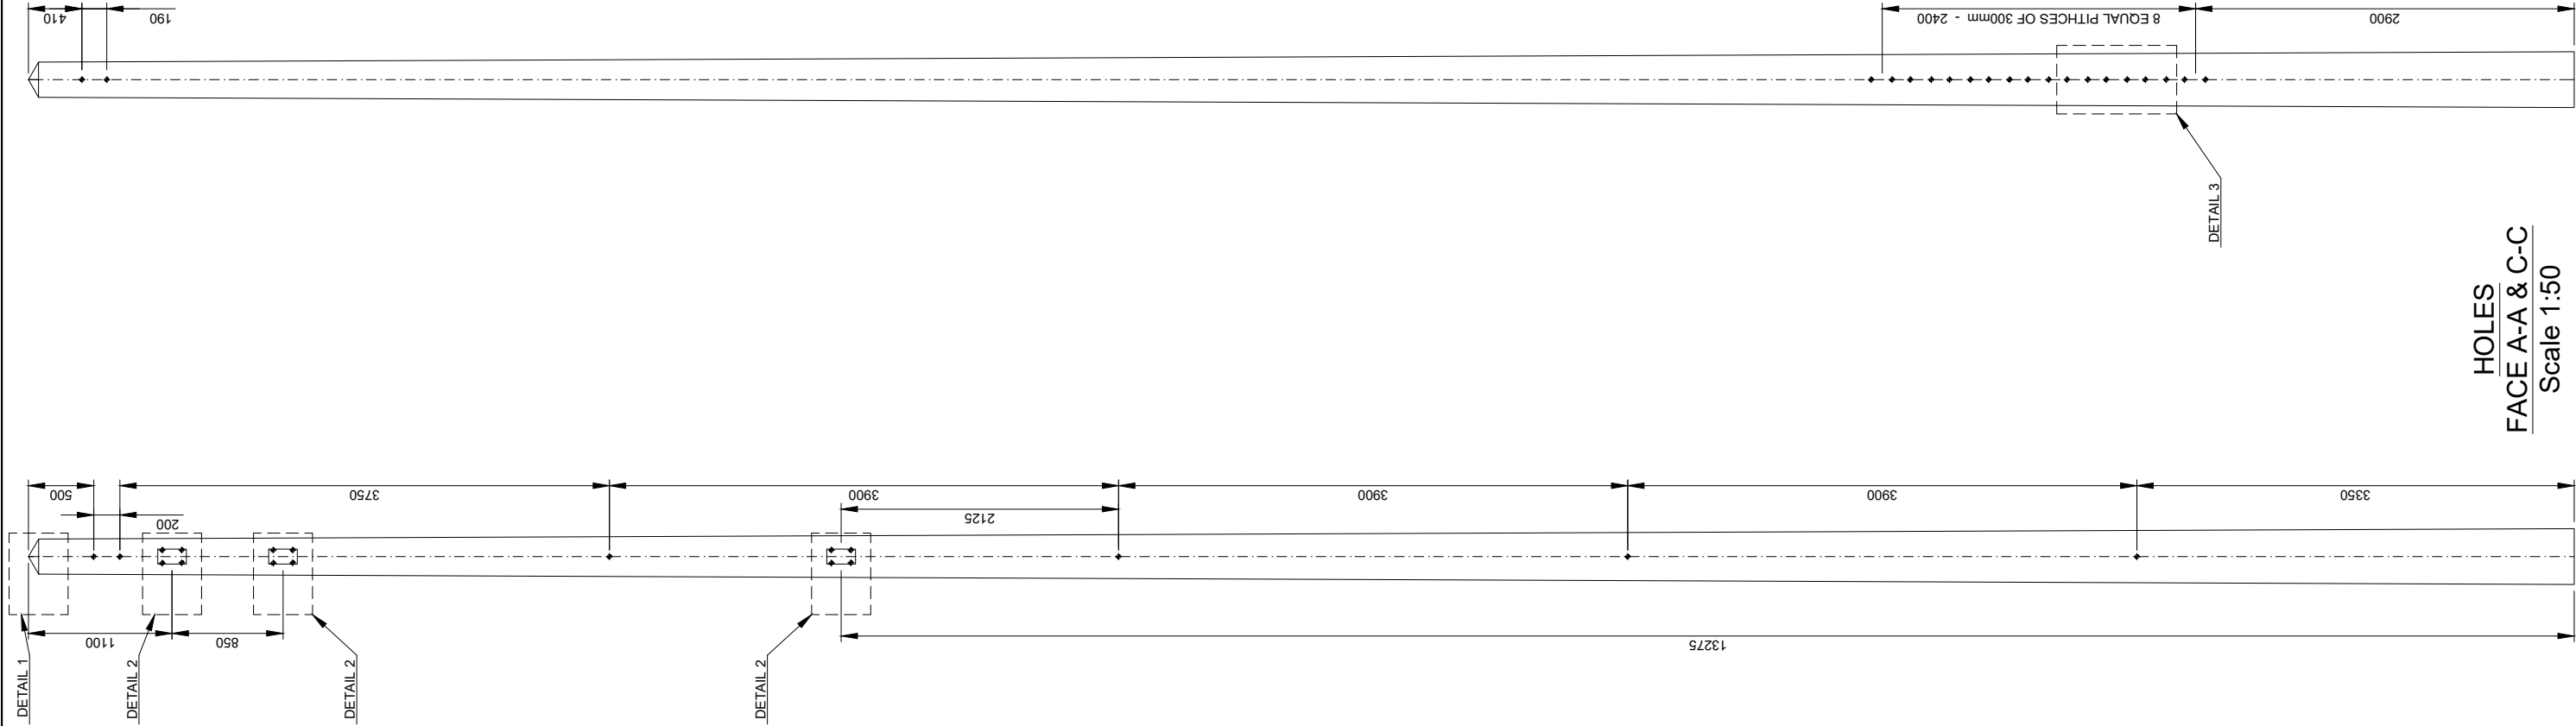

NOTES:

ALL HOLES TO BE Ø16mm THROUGH HOLES

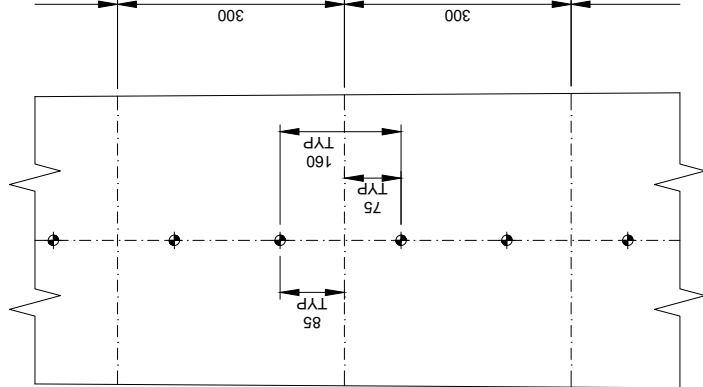

HOLES

FACE B-B & D-D

Scale 1:50

HOLES


FACE A-A & C-C

Scale 1:50



ALL SCALES AS SHOWN WHEN PRINTED AT A3

ALL SCALES AS SHOWN WHEN PRINTED AT A3

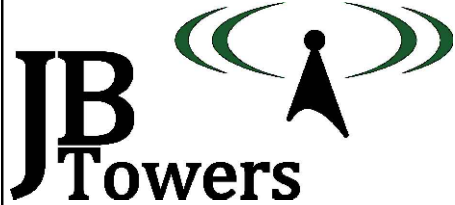

01	FIRST ISSUE			AM	03/04/19
REV	REV			BY	DATE
SCALE AS SHOWN		DRAWN	AL	CHECKED	MP
WHEN PRINTED AT A3		DATE	03/04/19	DATE	03/04/19
		APPROVED		JBT	
		DATE		03/04/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE

CARTMEL

TIMBER POLE HOLE SET OUT
SHEET 2 OF 2



SITE ADDRESS

ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF.
140348

DRG No.
201

REV
01

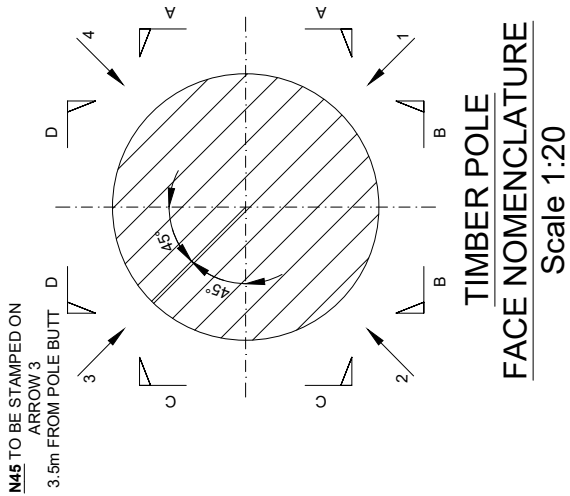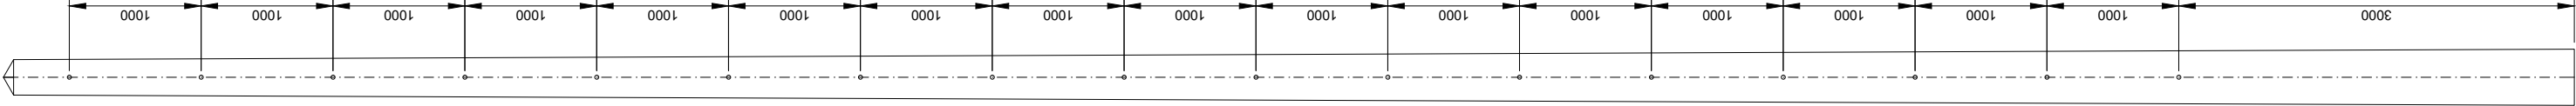

N45 TO BE STAMPED ON
ARROW 3
3.5m FROM POLE BUTT

ALL HOLES ON ARROW 1
TO BE Ø8mm & 70mm LONG

HOLES
ARROW 1
Scale 1:50



ALL SCALES AS SHOWN WHEN PRINTED AT A3

ALL SCALES AS SHOWN WHEN PRINTED AT A3

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 120 MIN
- Overall height: 220 MIN
- Four holes, each with a diameter of 16mm (4 No Ø16mm HOLES).
- Distance between the centers of the holes: 50 FIXED (horizontal) and 75 FIXED (vertical).
- 45° CHAMFER ON BOTTOM EDGE.
- FLAT SURFACE 120x220 mm.

NOTES:

- DIMENSIONS ANNOTATED BE ADHERED TO
-TOLERANCE: +2mm; -
- DIMENSIONS ANNOTATED DEPEND ON THE ACTUAL
-TOLERANCE: N/A
- DIMENSIONS ANNOTATED THE MINIMUM LENGTH RE
-TOLERANCE: +50mm; -
- THROUGH HOLES ARE SP

NOTES:


1. DIMENSIONS ANNOTATED AS 'FIXED' ARE TO BE ADHERED TO
-TOLERANCE: +2mm; -2mm
2. DIMENSIONS ANNOTATED AS 'VARIABLE' DEPEND ON THE ACTUAL DIAMETER
-TOLERANCE: N/A
3. DIMENSIONS ANNOTATED AS 'MIN' PROVIDE THE MINIMUM LENGTH REQUIRED
-TOLERANCE: +50mm; -0mm
3. THROUGH HOLES ARE SPECIFIED ON DRAWING 201




01	FIRST ISSUE			AL	03/04/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AL DATE 03/04/19	CHECKED MP DATE 03/04/19	APPROVED JB DATE 03/04/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

DRG No.
202



ALL SCALES AS SHOWN WHEN PRINTED AT A3

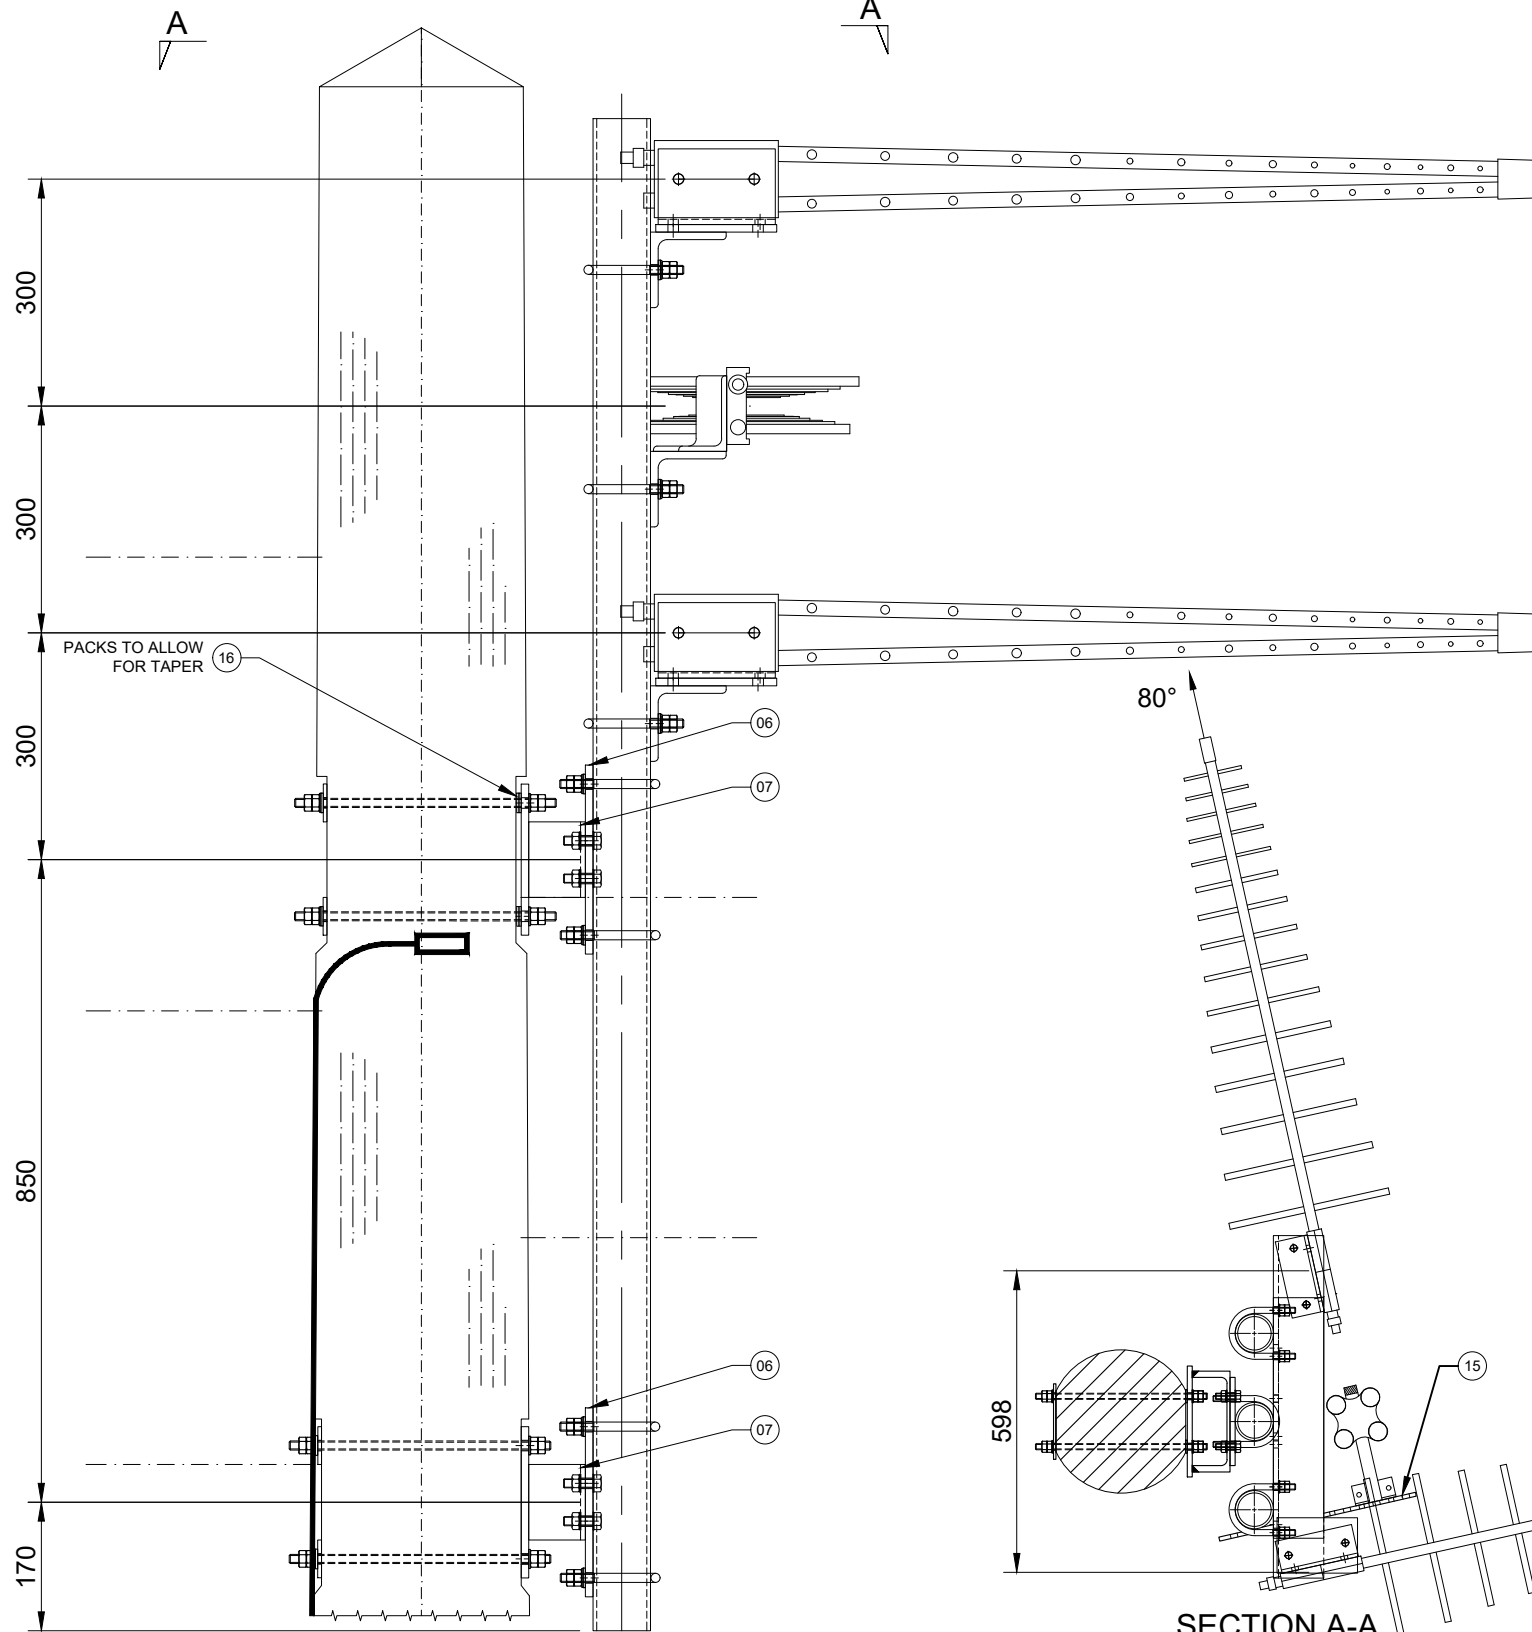

DETAIL G - Tx ANTENNA MOUNT
Scale 1:10

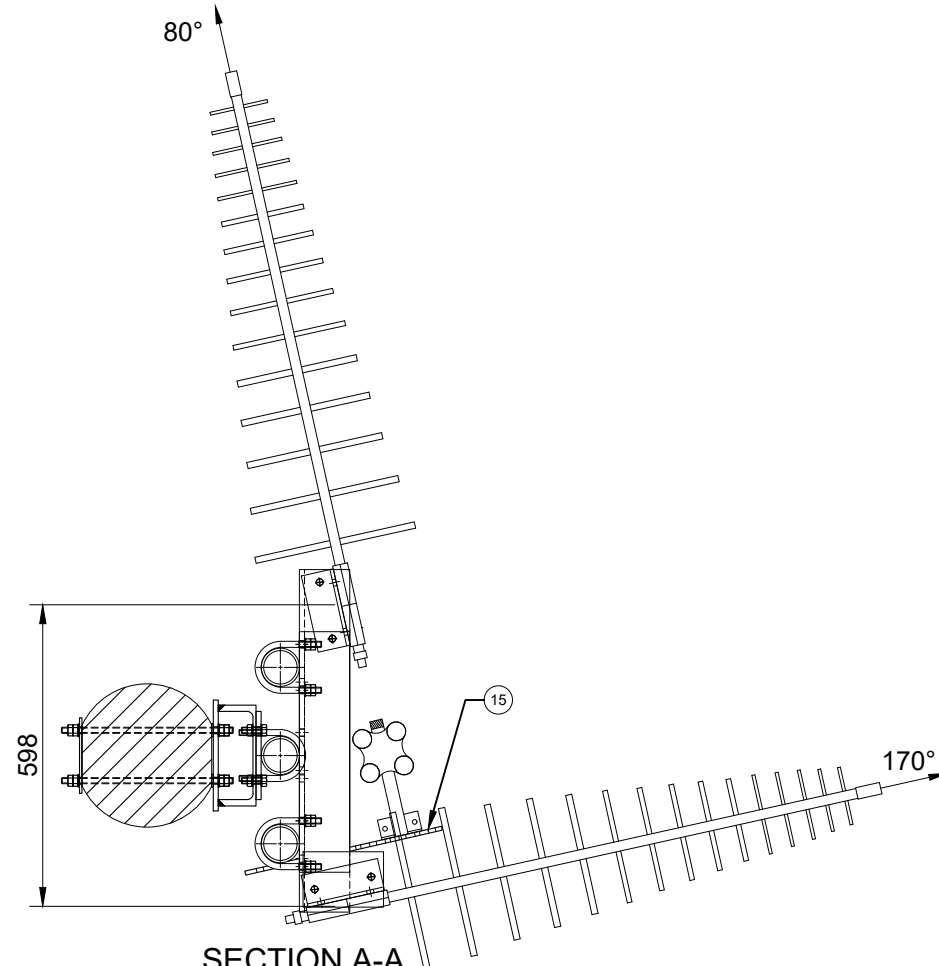

SECTION A-A
Scale 1:15

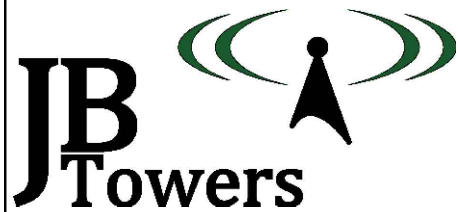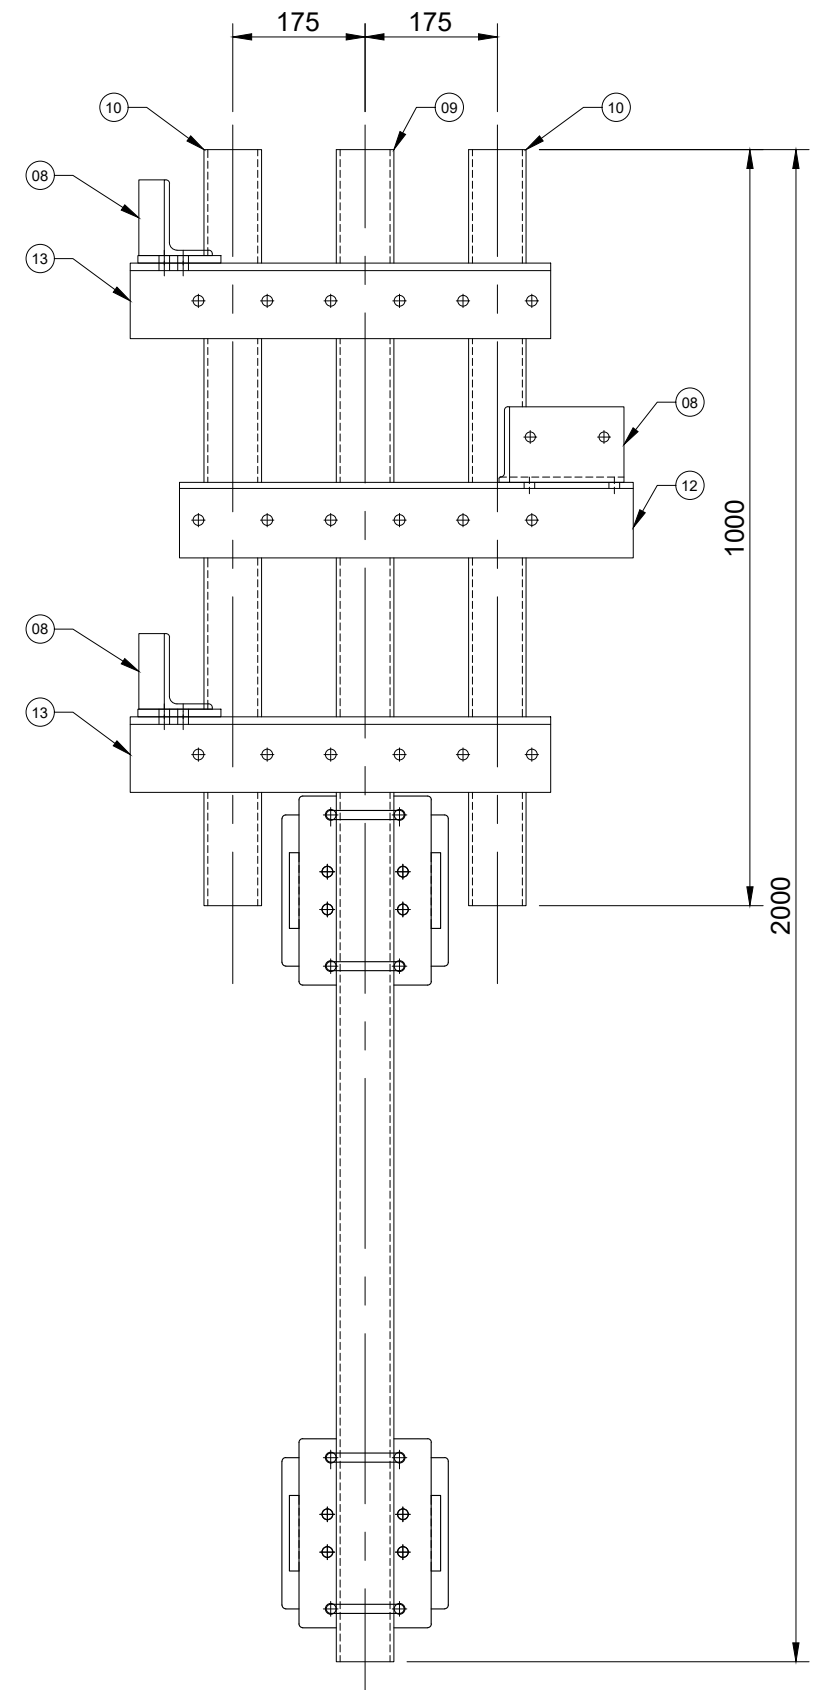

02	ANTENNA ORIENTATION ADJUSTED	AL	09/04/19
01	FIRST ISSUE	AL	03/04/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN AL DATE 03/04/19	CHECKED MP DATE 03/04/19	APPROVED JBT DATE 03/04/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE
ANTENNA MOUNT
DETAIL G

SITE ADDRESS
ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF.
140348


DRG No.
203

REV
02

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

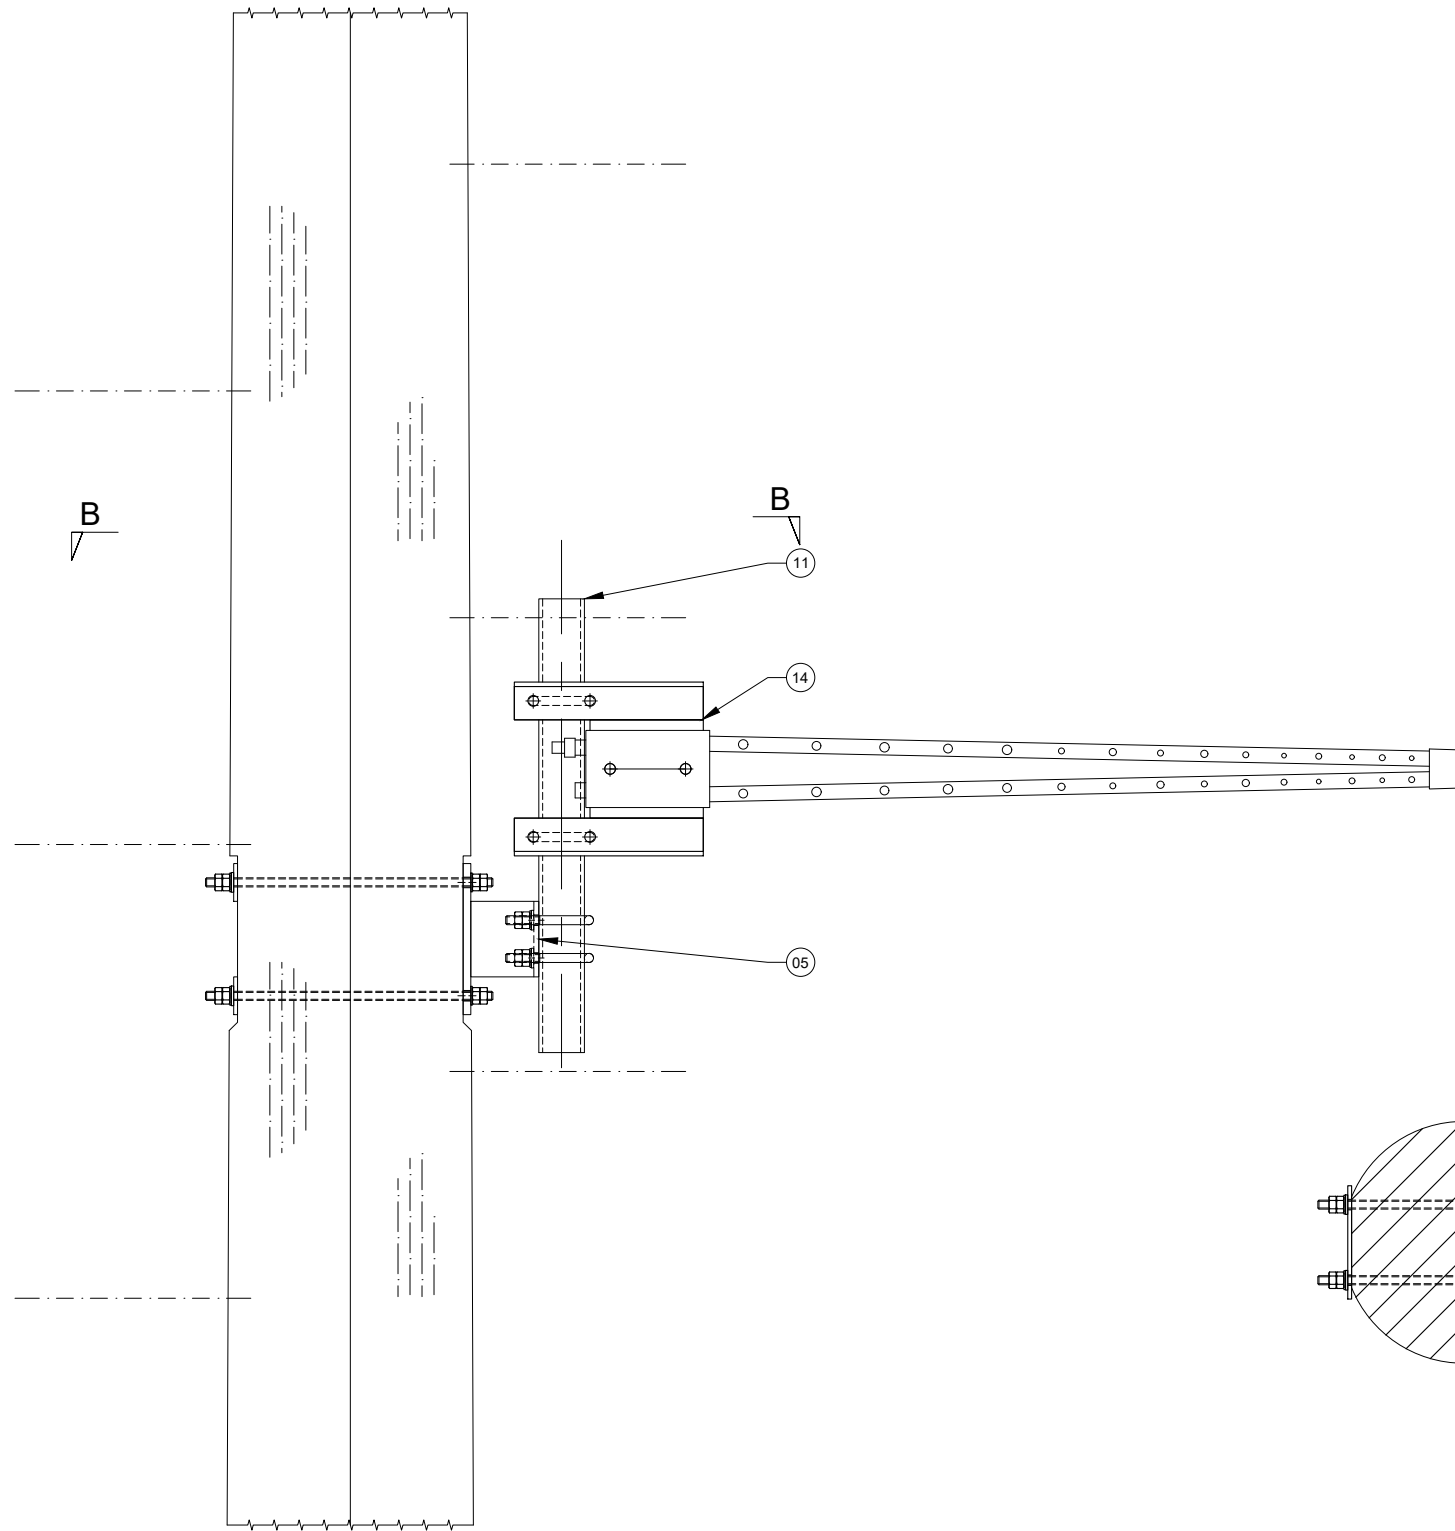

DETAIL H - Rx ANTENNA MOUNT
Scale 1:10

SECTION B-B
Scale 1:10

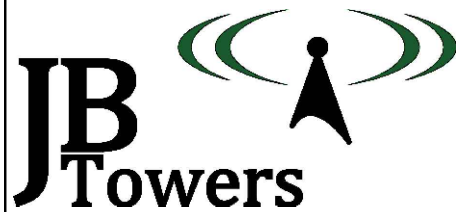

01	FIRST ISSUE				AL	03/04/19
REV	REV				BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN	AL	CHECKED	MP	APPROVED JBT
		DATE	03/04/19	DATE	03/04/19	DATE 03/04/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.						



TITLE
ANTENNA MOUNT
DETAIL H

SITE ADDRESS		
ARQIVA SITE GRANGE OVER SANDS CUMBRIA LA11 6QF		
ARQIVA REF. 140348	DRG No. 204	REV 01

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3



Total Weight:	
---------------	--

- All steel hot dip galvanized
- For fabrication notes see drawing 306

Total Weight:	3.40 kg
---------------	---------









SITE ADDRESS

ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF. 140348	DRG No. 300	REV 01
-----------------------	----------------	-----------


ALL SCALES AS SHOWN WHEN PRINTED A1 A3

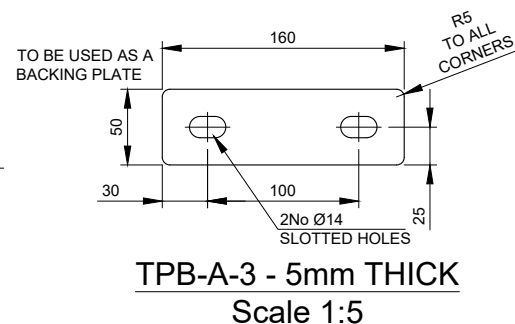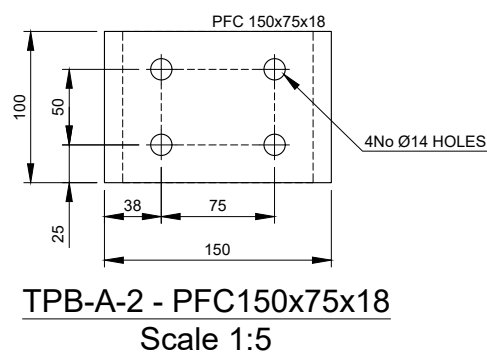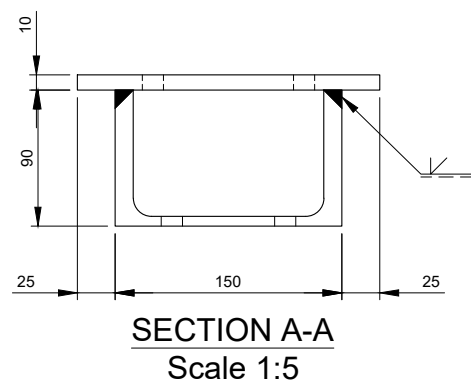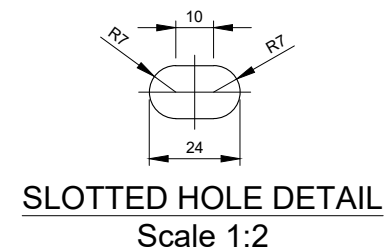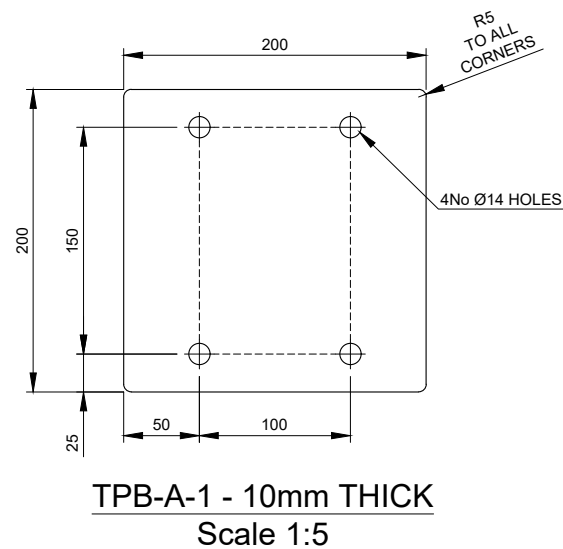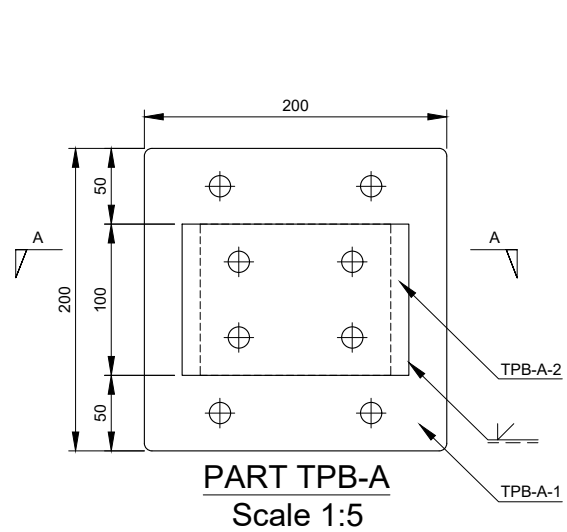

Parts list for TPB-A

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-A-1	1	220x200x10mm	N/A	S275J0	3.45 kg
02	TPB-A-2	1	PFC 150x75x18	100mm	S275J0	1.79 kg
03	TPB-A-3	2	160x50x5mm	N/A	S275J0	0.31 kg
04	STUDS	4	M12 STUDDING	400mm	GRADE 8.8	0.34 kg
05	U-BOLT	2	M12 U-BOLT FOR CHS 60.3mm	N/A	GRADE 8.8	-
Total Weight:						7.22 kg

- All steel hot dip galvanized
- Each STUD & U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E FLat Washer and 1 Spring Washer
- For fabrtrication notes see drawing 306

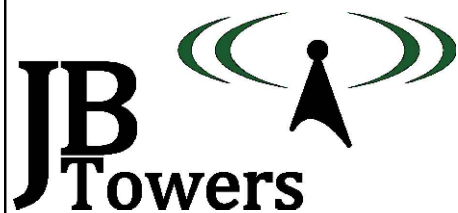







01	FIRST ISSUE	AL	03/04/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN AM DATE 03/04/19	CHECKED MP DATE 03/04/19	APPROVED JBT DATE 03/04/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE	STEELWORK BRACKET		
PART: TPB-A			
SITE ADDRESS	ARQIVA SITE GRANGE OVER SANDS CUMBRIA LA11 6QF		
ARQIVA REF. 140348	DRG No. 301	REV 01	

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

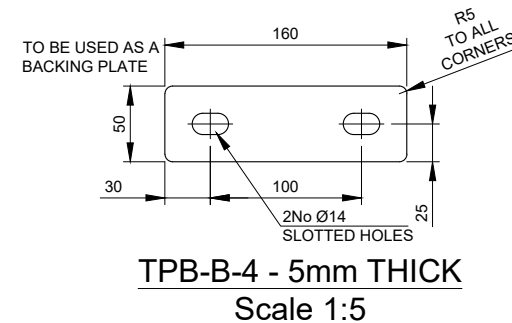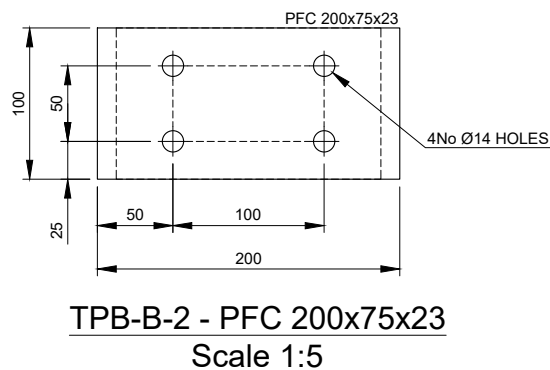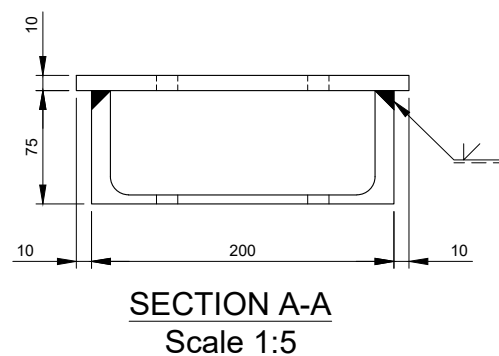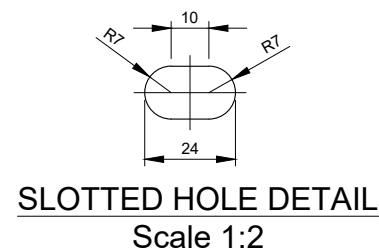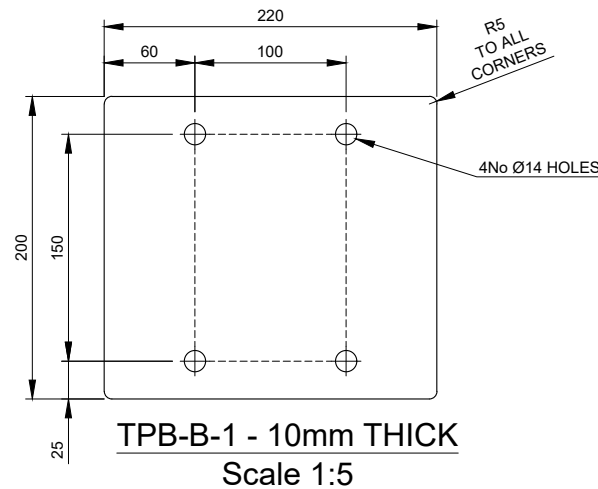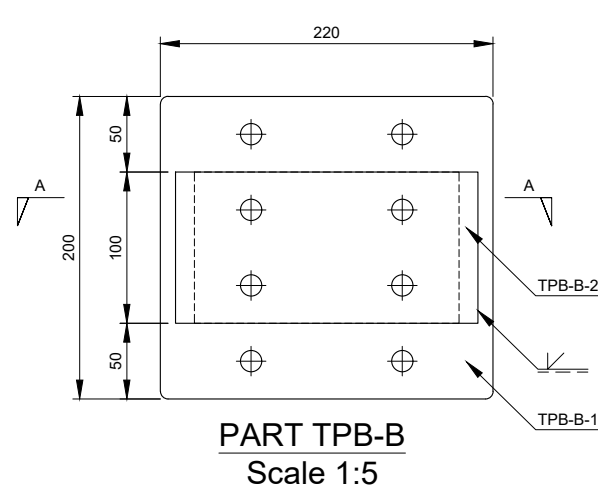

Parts list for TPB-B

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPB-B-1	1	220x200x10mm	N/A	S275J0	3.45 kg
02	TPB-B-2	1	PFC 200x75x23	100mm	S275J0	2.30 kg
03	TPB-B-4	2	160x50x5mm	N/A	S275J0	0.31 kg
04	STUDS	4	M12 STUDDING	400mm	GRADE 8.8	0.35 kg
Total Weight:						7.77 kg

- All steel hot dip galvanized
- Each STUD & U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E Flat Washer and 1 Spring Washer
- For fabrication notes see drawing 306

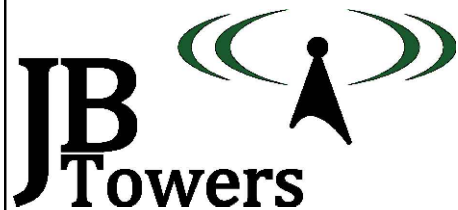

01	FIRST ISSUE			AL	03/04/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AM DATE 03/04/19	CHECKED MP DATE 03/04/19	APPROVED JBT DATE 03/04/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE
STEELWORK BRACKET
PART: TPB-B

SITE ADDRESS
ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF.
140348


DRG No.
302

REV
01

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

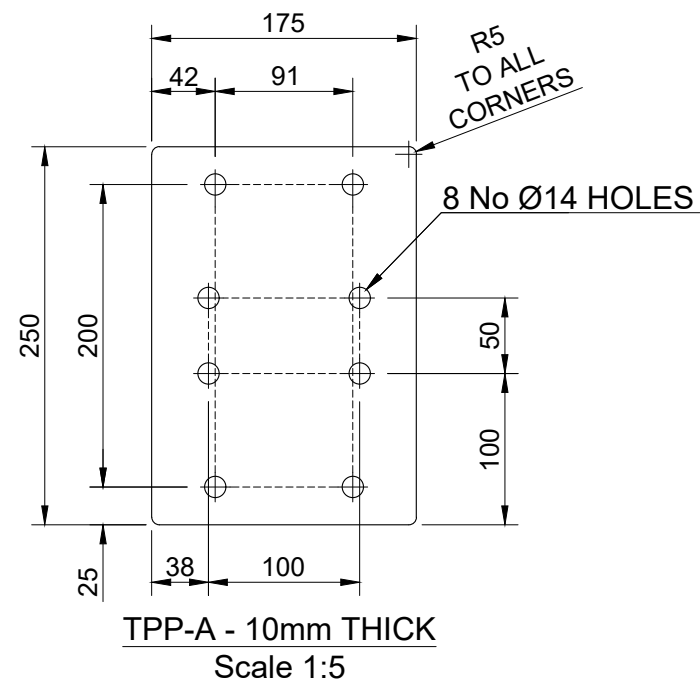

Parts list for TPP-A

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPP-A	1	250x175x10mm	N/A	S275J0	3.45 kg
02	BOLT	4	M12 45mm LONG (2D+6)	45mm	GRADE 8.8	-
03	U-BOLT	3	M12 U-BOLT FOR CHS 76.1mm	N/A	GRADE 8.8	-
Total Weight:						3.45 kg


- All steel hot dip galvanized
- Each STUD & U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- Each BOLT to be supplied with 1 Full Nut, 1 Form E Flat Washer and 1 Spring Washer
- 1No U-BOLT to be used for TPL-A
- For fabrctation notes see drawing 306

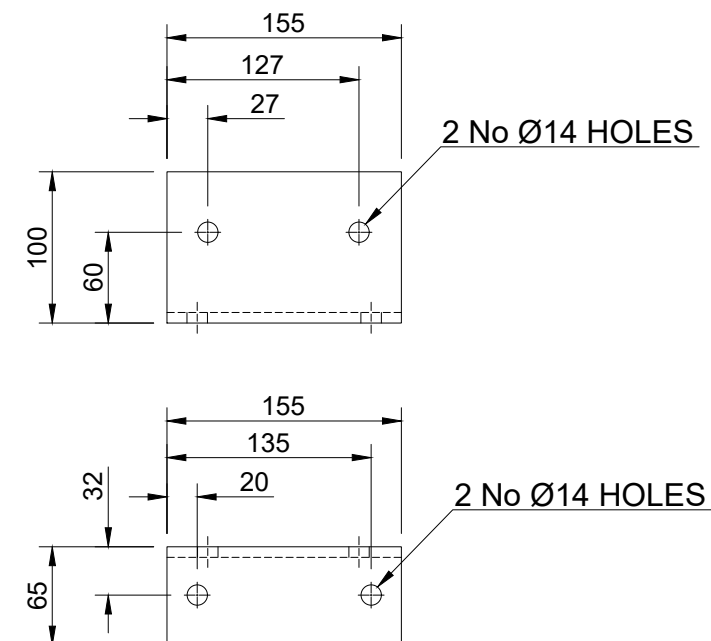

Parts list for TPL-C

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPL-C	1	UA 100x65x7	155mm	S275J0	1.36 kg
02	BOLT	2	M12 x 35 LONG	35mm	GRADE 8.8	-
Total Weight:						1.36 kg


- All steel hot dip galvanized
- Each BOLT to be supplied with 1 Full Nut, 1 Form E Flat Washer and 1 Spring Washer
- For fabrctation notes see drawing 306

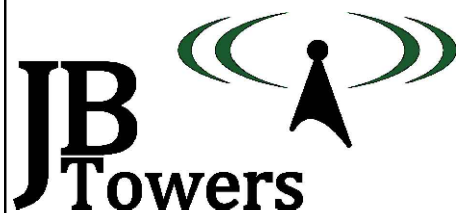


01	FIRST ISSUE	AL	03/04/19
REV	REV	BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3	DRAWN AL DATE 03/04/19	CHECKED MP DATE 03/04/19	APPROVED JBT DATE 03/04/19
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.			

TITLE	SITE ADDRESS		
INTERFACE PLATE & LOG MOUNT	ARQIVA SITE GRANGE OVER SANDS CUMBRIA LA11 6QF		
PARTS: TPP-A; TPL-C	ARQIVA REF. 140348	DRG No. 303	REV 01


ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

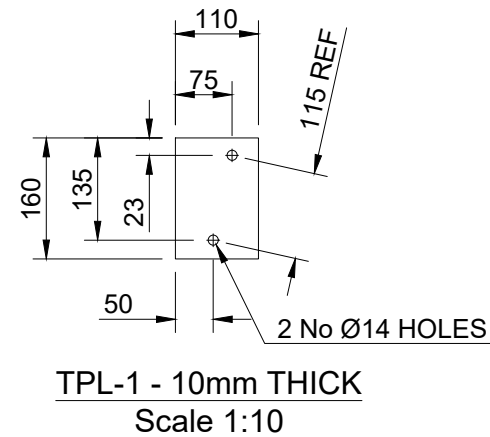

- All steel hot dip galvanized
- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrication notes see drawing 306




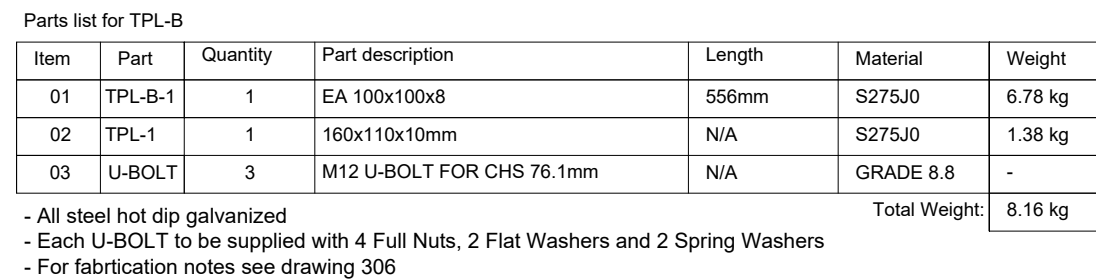


02	TPL-A NOW A SINGLE PART, LENGTH INCREASED			AL	09/04/19
01	FIRST ISSUE			AL	03/04/19
REV	REV			BY	DAT
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AL DATE 03/04/19	CHECKED MP DATE 03/04/19	APPROVED JB DATE 03/04/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

SITE ADDRESS

ARQIVA SITE
GRANGE OVER SANDS
CUMBRIA
LA11 6QF

ARQIVA REF. 140348	DRG No. 304	REV 02
------------------------------	-----------------------	------------------

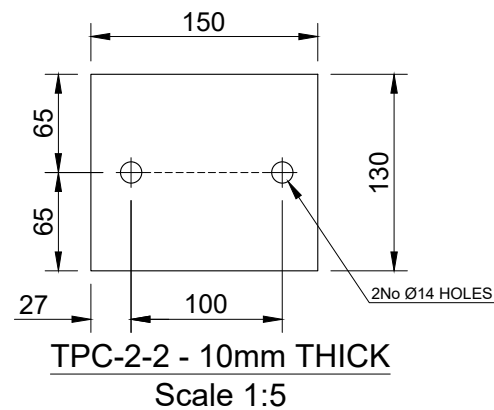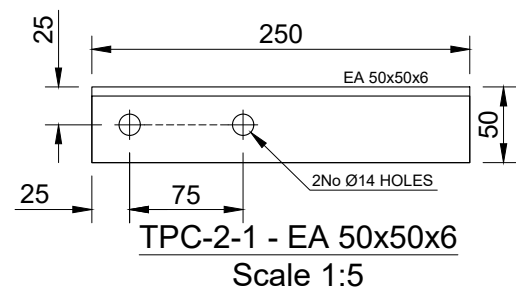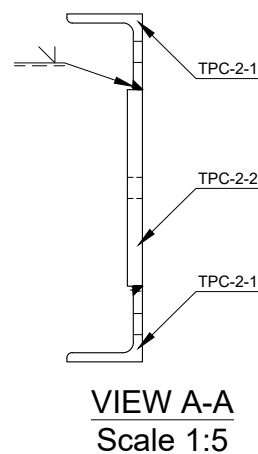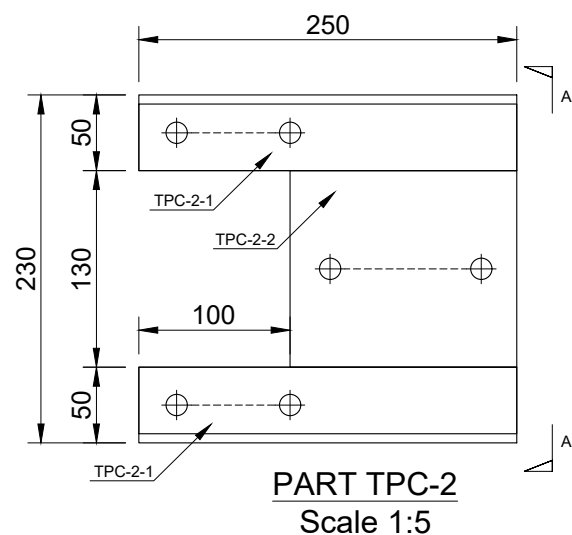


Parts list for TPC-2

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPC-2-1	2	EA 50x50x6	250mm	S275J0	2.24 kg
02	TPC-2-2	1	150x130x10mm	N/A	S275J0	1.53 kg
03	U-BOLT	2	M12 U-BOLT FOR CHS 60.3mm	N/A	GRADE 8.8	-

- All steel hot dip galvanized
- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrtaion notes see drawing 306

Total Weight:

3.77 kg

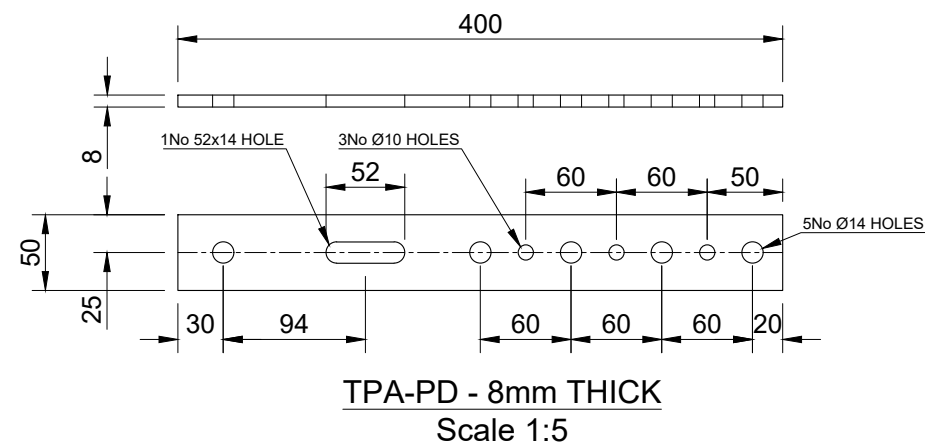


Parts list for TPA-PD

Item	Part	Quantity	Part description	Length	Material	Weight
01	TPA-PD	1	400x50x8mm	N/A	S275J0	1.26 kg
02	U-BOLT	1	M12 U-BOLT FOR CHS 76.1mm	N/A	GRADE 8.8	-

Total Weight:

1.26 kg

- All steel hot dip galvanized
- Each U-BOLT to be supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers
- For fabrtaion notes see drawing 304

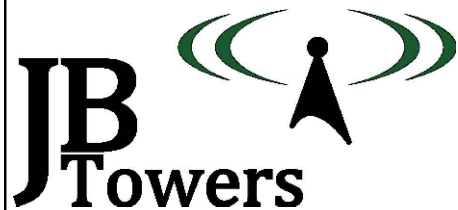

01	FIRST ISSUE	AL	03/04/19
REV	REV	BY	DATE
SCALE AS SHOWN	DRAWN	CHECKED	APPROVED
WHEN PRINTED AT A3	AL	MP	JBT
DATE	03/04/19	DATE	03/04/19
DATE	03/04/19	DATE	03/04/19

ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED.
THIS DRAWING TO BE READ IN CONJUNCTION WITH
OTHER RELEVANT DRAWINGS.

TITLE	SITE ADDRESS
LOG MOUNT & POWER DIVIDER STRAP	ARQIVA SITE GRANGE OVER SANDS CUMBRIA LA11 6QF
PARTS: TPC-2 & TPA-PD	
ARQIVA REF. 140348	DRG No. 305
	REV 01

ALL SCALES AS SHOWN WHEN PRINTED AT A3




ALL SCALES AS SHOWN WHEN PRINTED AT A3

Item	Part	Drawing	Quantity	Part description	Length	Material	Weight
01	01	200	1	3 MAN LATCHWAY SYSTEM & 3No. WIRE GUIDES FOR FACE MOUNTED MONOPOLE	17000	N/A	-
02	TPB-C	300	2	FALL ARREST ATTACHMENT POINT	N/A	S275J0	4.48 kg
03	03	200	46	PERMANENT BT STEP c/w 3No 10x75mm ZINC-PLATED COACH SCREWS	N/A	S275J0	13.80 kg
04	TPS-R	300	9	'MonoStep' ASSEMBLY	N/A	S275J0	30.60 kg
05	TPB-A	301	1	MOUNTING BRACKET	N/A	S275J0	7.22 kg
06	TPP-A	303	2	PLATE A INTERFACE	N/A	S275J0	6.90 kg
07	TPB-B	302	2	MOUNTING BRACKET	N/A	S275J0	15.54 kg
08	TPL-C	303	3	LOG MOUNT	N/A	S275J0	4.08 kg
09	09	203	1	CHS 76.1x5mm	2000mm	S355J2H	17.54 kg
10	10	203	2	CHS 76.1x5mm	1000mm	S355J2H	17.54 kg
11	11	204	1	CHS 60.3x5mm	600mm	S355J2H	4.09 kg
12	TPL-A	304	1	LOG MOUNTING BRACKET	600mm	S275J0	7.32 kg
13	TPL-B	304	2	LOG MOUNTING BRACKET	556mm	S275J0	16.32 kg
14	TPC-2	305	1	LOG MOUNTING BRACKET	250mm	S275J0	3.77 kg
15	TPA-PD	305	2	POWER DIVIDER STRAP	N/A	S275J0	2.52 kg
16	16	203	12	M12 WASHER	N/A	GRADE 8.8	-
17	17	200	1	FEEDER COVER - 2/CG/100	3500mm	UV RESISTANT PLASTIC	-
18	18	200	17	FEEDER CLAMP - 2/FCD/028	N/A	POLYPROPYLENE	-
19	19	200	17	M10 SCREW DOWELS WTH M10 NUT	100mm	STAINLESS STEEL	-
20	20	200	1	PoleSaver	750mm	N/A	-
21	21	200	8	M12 STUD + 4No NUTS + 2No FLAT WASHERS + 1No Ø50mm WASHER (FOR FALL ARREST SYSTEM)	500mm	GRADE 8.8	3.56 kg
Total Weight:							120.20 kg

- All steel hot dip galvanized
- All U-BOLTS to be FLA supply, each Supplied with 4 Full Nuts, 2 Flat Washers and 2 Spring Washers

NOTES:

1. WELDING TO BE IN ACCORDANCE WITH BS EN 1011-1:2009
2. LINEAR DIMS TO BE WITHIN ±1mm;
3. ANGULAR TOLERANCES TO BE WITHIN 0.5°
4. WELDING SYMBOLS ARE IN ACCORDANCE WITH BS EN 22553:1995
5. ALL PROFILE EDGES TO BE DRESSED AND SHARP CORNERS REMOVED
6. ALL WELD SIZES ARE FINAL SIZES
7. ALL WELDED JOINTS ARE TO BE PICKLE TIGHT
8. ALL STEELWORK TO BE BS EN 10025 GRADE S275 J0 UNO & HOT DIPPED GALVANISED TO BS EN ISO 1461. (ALL HOLLOW SECTIONS TO BE GRADE S355 J0H)
9. ALL STEEL IS TO BE SUPPLIED IN ACCORDANCE WITH EN 1090 TO EXECUTION CLASS 2
10. ALL NON PRE-LOADED BOLTS TO BE COMPLIANT STRUCTURAL BOLTS TO BS EN ISO 15048 PARTS 1&2.
11. STEELWORK COMPONENTS SHALL BE HOT DIP GALVANISED TO ACHIEVE A "VERY HIGH" DURABILITY FOR AN ENVIRONMENT CATEGORY CODE C4 FROM TABLE 1 IN BS EN ISO 14713
12. BOLTS AND NUTS SHALL BE SUPPLIED IN ACCORDANCE WITH BS 7371, SPUN GALVANISED IN ACCORDANCE WITH ISO 10684, THE NUTS RE-TAPPED AFTER GALVANISING, AND THE THREADS TREATED WITH GREASE.
13. ALL BOLTS TO BE CUT ON SITE TO EXTEND MAX 10mm BEYOND THE NUT WHEN TIGHTENED UNO.
14. ALL SITE DRILLED HOLE/CUT ENDS TO BE TREATED WITH METAFLUX 70-40 ZINC PASTE FOLLOWED BY 1 COAT OF 7-42 ZINC ALU OR 70-16 ALUMINIUM SPRAY

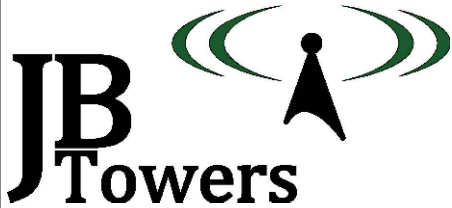

02	TPL-A ADJUSTED IN PARTS LIST			AL	09/04/19
01	FIRST ISSUE			AL	03/04/19
REV	REV			BY	DATE
SCALE AS SHOWN WHEN PRINTED AT A3		DRAWN AL DATE 03/04/19	CHECKED MP DATE 03/04/19	APPROVED JBT DATE 03/04/19	
ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.					

TITLE


PARTS LIST

SITE ADDRESS		
ARQIVA SITE GRANGE OVER SANDS CUMBRIA LA11 6QF		
ARQIVA REF. 140348	DRG No. 306	REV 02

ALL SCALES AS SHOWN WHEN PRINTED AT A3



ALL SCALES AS SHOWN WHEN PRINTED AT A3

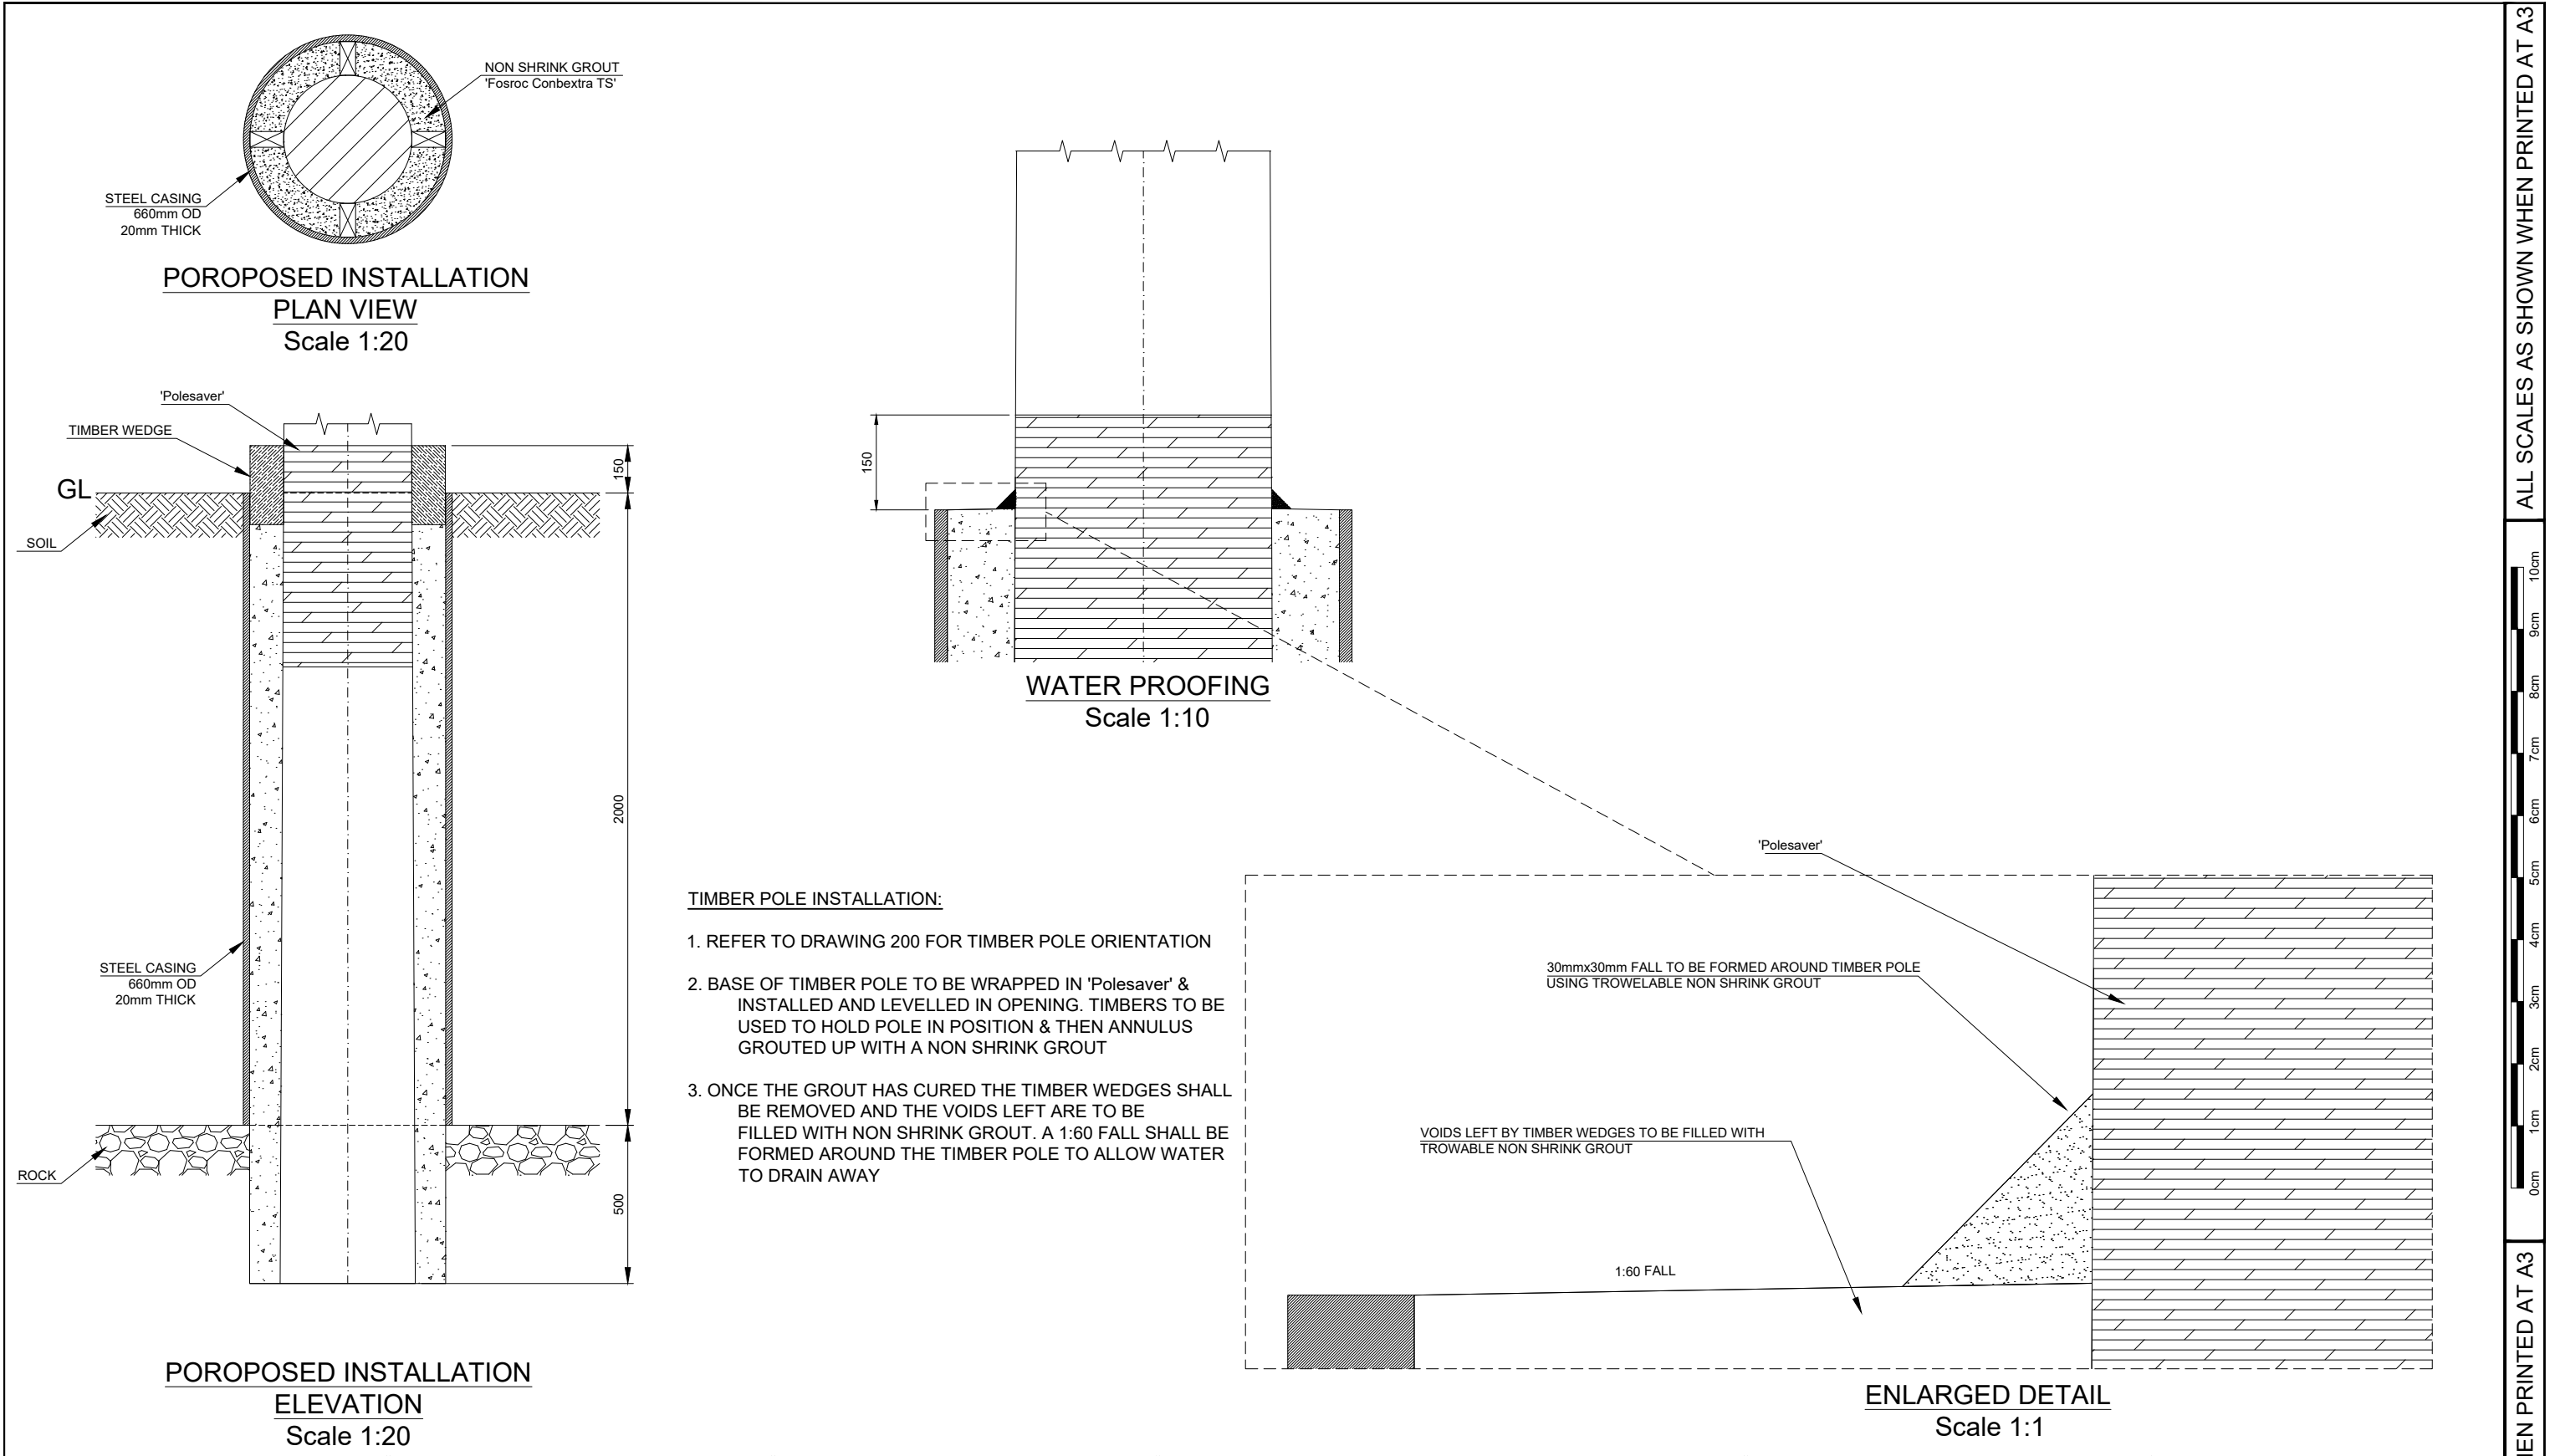

02GROUT CONTINUED THROUGH ROCK AND TOP DETAIL MODIFIEDAL09/04/19 01FIRST ISSUEAL03/04/19 REVREVBYDATE		SCALE AS SHOWNWHEN PRINTED AT A3 DRAWN ALDATE 03/04/19 CHECKED MPDATE 03/04/19 APPROVED JBTDATE 03/04/19		ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.	
TITLE				FOUNDATION DETAILS	
SITE ADDRESS				ARQIVA SITE GRANGE OVER SANDS CUMBRIA LA11 6QF	
ARQIVA REF. 140348		DRG No. 400		REV 02	

ALL SCALES AS SHOWN WHEN PRINTED AT A3

0cm 1cm 2cm 3cm 4cm 5cm 6cm 7cm 8cm 9cm 10cm

ALL SCALES AS SHOWN WHEN PRINTED AT A3