



DESCRIPTION				
FIRST ISSUE				
REV	DATE	BY	CHKD	APPD
A	14/09/15	JDH	OC	KM

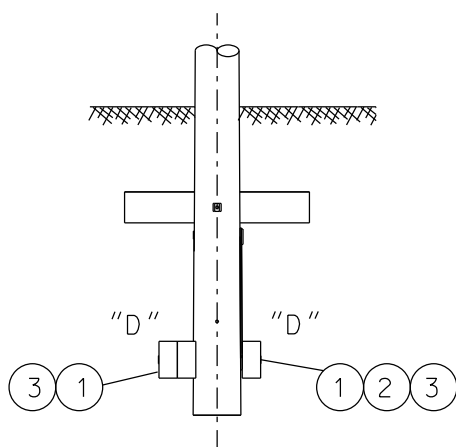

SIDE VIEW: 15m POLES

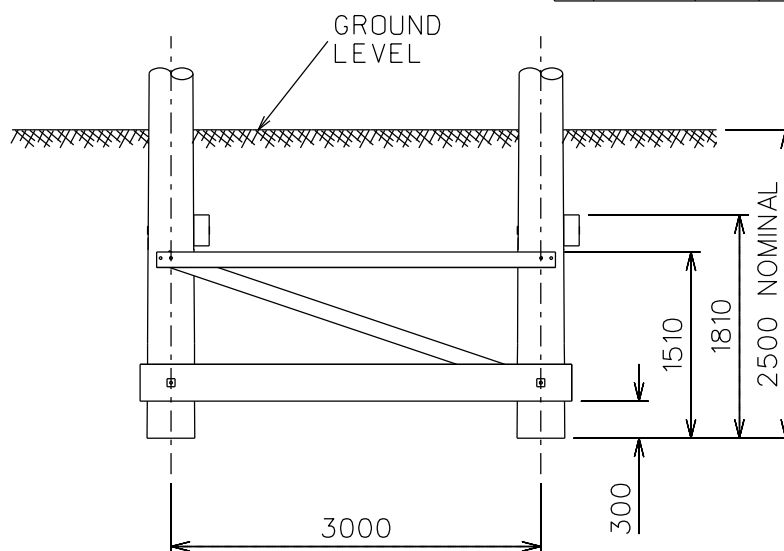

15m POLE FRONT ELEVATION

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (kg)	REMARKS
1	Timber Baulk	LSTC/STD/PAR/601	2	135	Timber Baulk "D" in addition to 15_15229_41 & 42
2	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.0	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3	Square Flat Washer	LSTC/STD/PAR/619	2	0.1	
Total Additional Calculated Weight = 85Kg					

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "POOR" SOIL CONDITIONS ARE ENCOUNTERED.
NOTE ONLY THE 15m POLES REQUIRE FOUNDATION BLOCKS & TIMBER BAULKS.
FOUNDATIONS TO BE INSTALLED IN LEVEL GROUND ONLY.

READ IN CONJUNCTION WITH:

15_15229_40/41/42: 4 POLE TERMINAL

19_15229_43: MATERIAL LIST

LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION

- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.

SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.

SHT 3 : FACTORS OF SAFETY.

SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT  SPECIFICATION CUMNOCK - DERSALLOCH ROUTE	TITLE ADDITIONAL MATERIAL - 4 POLE TERMINAL POOR SOIL CONDITIONS	SCALE 1:60 (UNLESS OTHERWISE STATED) DATE 14/09/2015 DRAWN JDH DRAWING NUMBER 16_15229_50	ORIGINAL SIZE A4 CHECKED OC APPROVED KM	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffeld East Yorkshire YO25 5XA 01377 253617
			REV A	

