


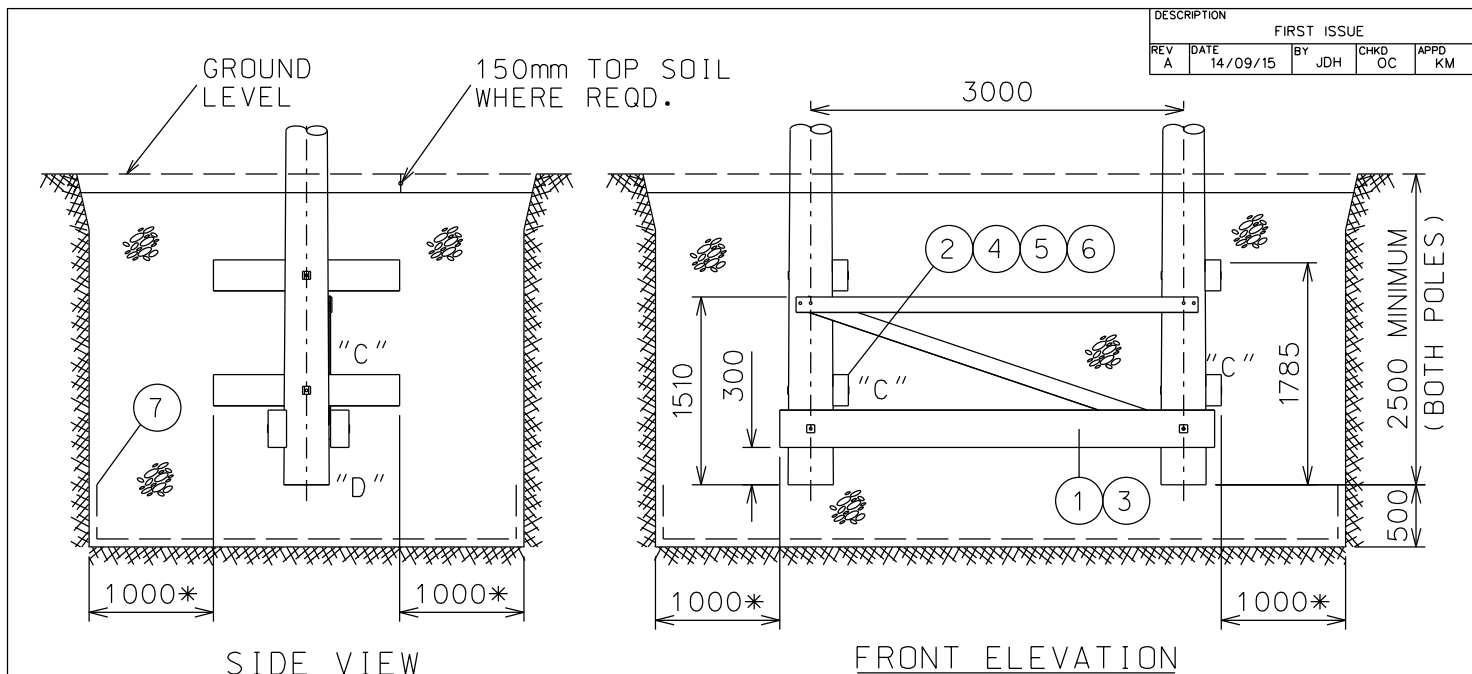

* MINIMUM DISTANCE BETWEEN FACE OF
EXCAVATION & STRUCTURE TO ALLOW
ACCESS TO PLACE GRANULAR FILL & COMPACT

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (kg)	REMARKS
1	"H" Pole Timber Baulk	LSTC/STD/PAR/601	1	135	Timber Baulk "D" in addition to 15_15229_52
2	Foundation Block	LSTC/STD/PAR/602	2	42	Foundation Block "C" in addition to 15_15229_52
3	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	0.5	M20 Bolts to attach additional Timber Baulk "D" to Foundation
4	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	1.5	M20 Bolts to attach additional Foundation Block "C"
5	Square Flat Washer	LSTC/STD/PAR/619	4	0.1	Flat Washers in addition to 15_15229_52
6	Square Curved Washer	LSTC/STD/PAR/620	2	0.2	Curved Washers in addition to 15_15229_52
7	Geotextile Membrane	--	1	--	Place in Bottom of Excavation Prior to Granular Backfill

Total Additional Calculated Weight = 225Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "VERY POOR" SOIL CONDITIONS ARE ENCOUNTERED.
THESE FOUNDATIONS CAN ONLY BE INSTALLED IN LEVEL GROUND.
TO BE READ IN CONJUNCTION WITH:
15_15229_52: 5-20° ANGLE STRUCTURE
19_15229_54: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
- IMPORTANT:** REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT		TITLE	ADDITIONAL MATERIAL -		SCALE	1:60	ORIGINAL SIZE	A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617 
			5-20° ANGLE STRUCTURE		(UNLESS OTHERWISE STATED)				
VERY POOR			DATE	14/09/2015	CHECKED	OC			
SOIL CONDITIONS			DRAWN	JDH	APPROVED	KM			
PROJECT	CUMNOCK - DERSALLOCH ROUTE				DRAWING NUMBER	16_15229_58		REV	A