


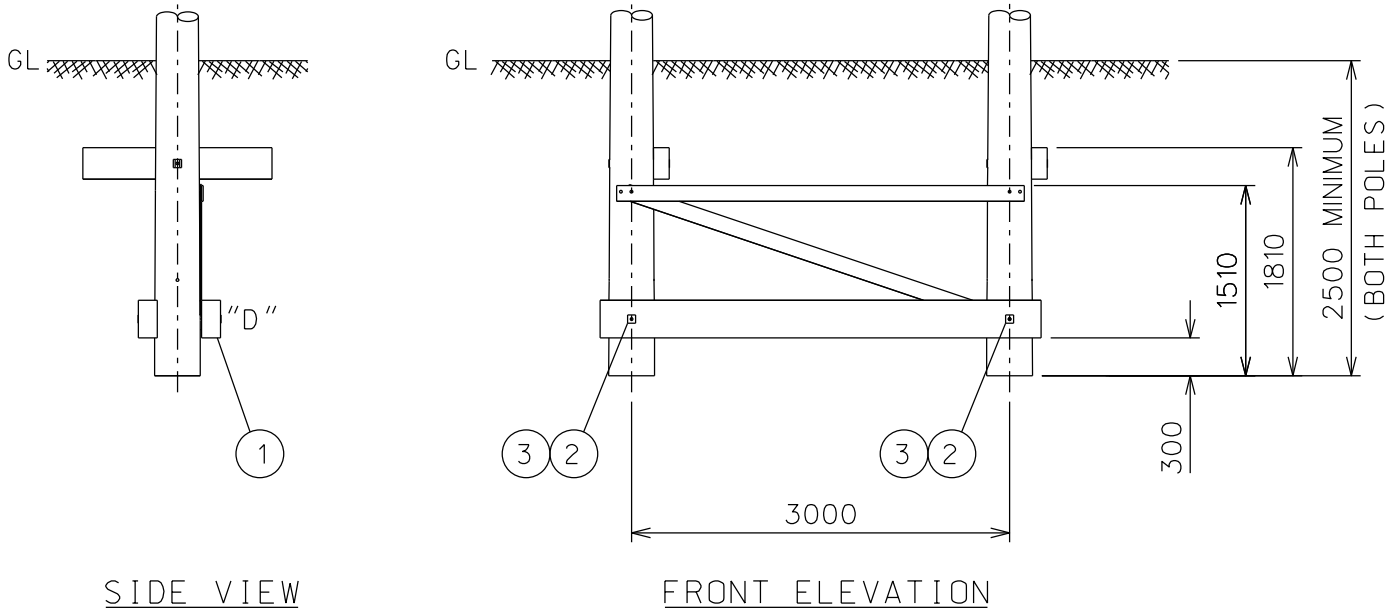

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (kg)	REMARKS
1	"H" Pole Timber Baulk	LSTC/STD/PAR/601	1	135	Timber Baulk "D" in addition to 15_15229_59
2	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	1.5	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3	Square Flat Washer	LSTC/STD/PAR/619	2	0.1	Flat Washers in addition to 15_15229_59
4					
5					
6					
7					
8					

Total Additional Calculated Weight = 138Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
 - ALL DIMENSIONS ARE IN MILLIMETRES.
 - MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "POOR" SOIL CONDITIONS ARE ENCOUNTERED.
THESE FOUNDATIONS CAN ONLY BE INSTALLED IN LEVEL GROUND.
TO BE READ IN CONJUNCTION WITH:
15_15229_59: 20-35° ANGLE STRUCTURE
19_15229_61: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
 - IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.
- SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.