


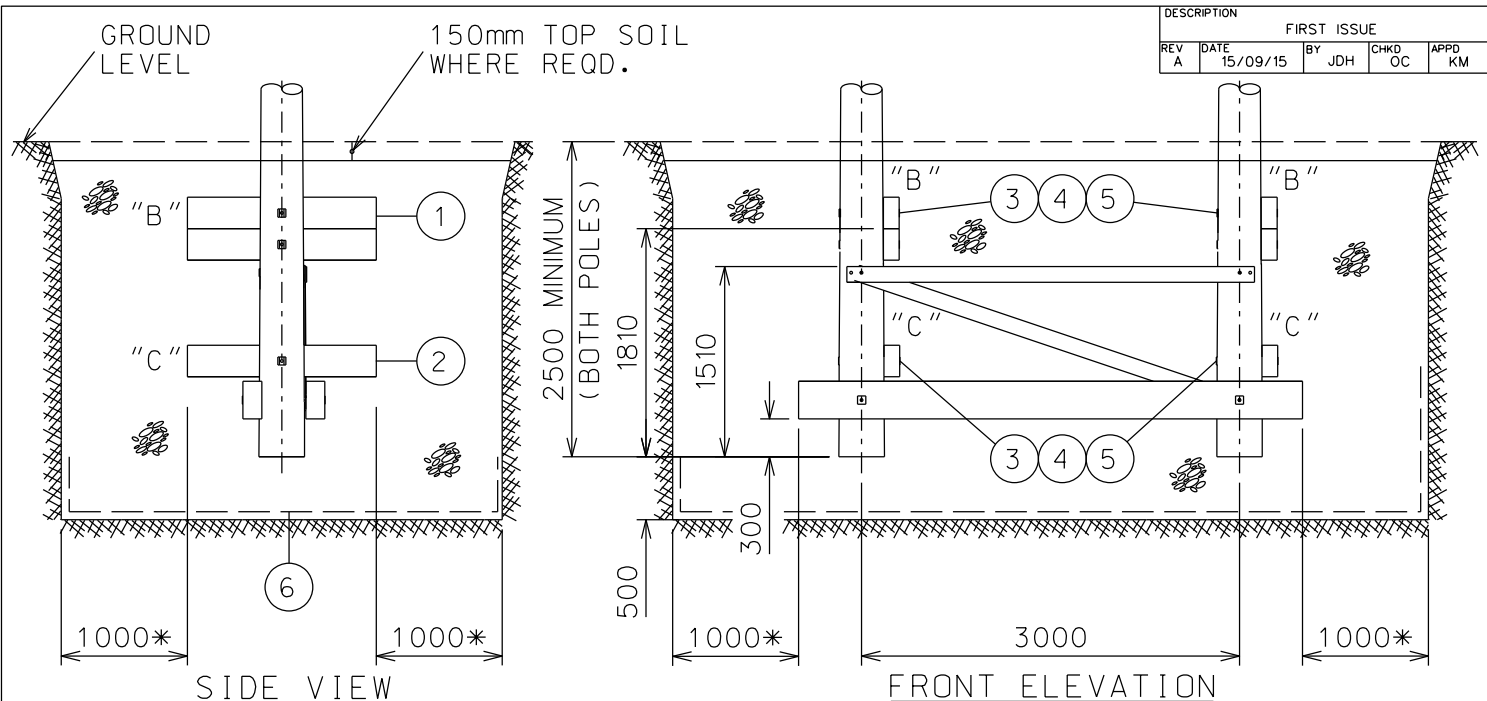

* MINIMUM DISTANCE BETWEEN FACE OF EXCAVATION
& STRUCTURE TO ALLOW ACCESS TO PLACE
GRANULAR FILL & COMPACT

ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1 Foundation Block	LSTC/STD/PAR/602	2	42	Foundation Block "B" in addition to 15_15229_66
2 Foundation Block	LSTC/STD/PAR/602	2	42	Foundation Block "C" in addition to 15_15229_66
3 Square Curved Spacer	LSTC/STD/PAR/620	4	0.2	Curved Washers in addition to 15_15229_66
4 Square Flat Washer	LSTC/STD/PAR/619	4	0.1	Flat Washers in addition to 15_15229_66
5 M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	4	0.5	M20 Bolts to attach additional Foundation Blocks "B & C"
6 Geotextile Membrane	--	1	--	Place in Bottom of Excavation prior to Granular Backfill

Total Additional Calculated Weight = 172Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "VERY POOR" SOIL CONDITIONS ARE ENCOUNTERED. THESE FOUNDATIONS CAN ONLY BE INSTALLED IN LEVEL GROUND.

TO BE READ IN CONJUNCTION WITH:

15_15229_66: H-POLE INTERMEDIATE STRUCTURE

19_15229_67: MATERIAL LIST

LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION

- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.

SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.

SHT 3 : FACTORS OF SAFETY.

SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT	KTU	TITLE	ADDITIONAL MATERIAL - 'H' POLE INTERMEDIATE VERY POOR SOIL CONDITIONS	SCALE NTS (UNLESS OTHERWISE STATED)	ORIGINAL SIZE A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
SPECIFICATION	CUMNOCK - DERSALLOCH ROUTE			DATE 15/09/2015	CHECKED OC	
				DRAWN JDH	APPROVED KM	
				DRAWING NUMBER 16_15229_71	REV A	