



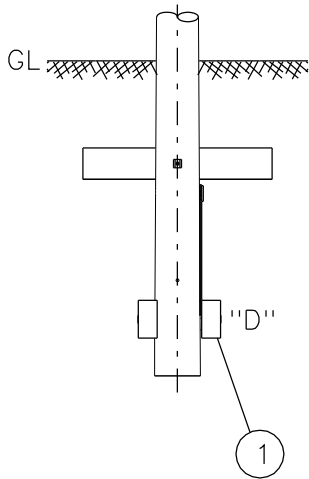

SIDE VIEW

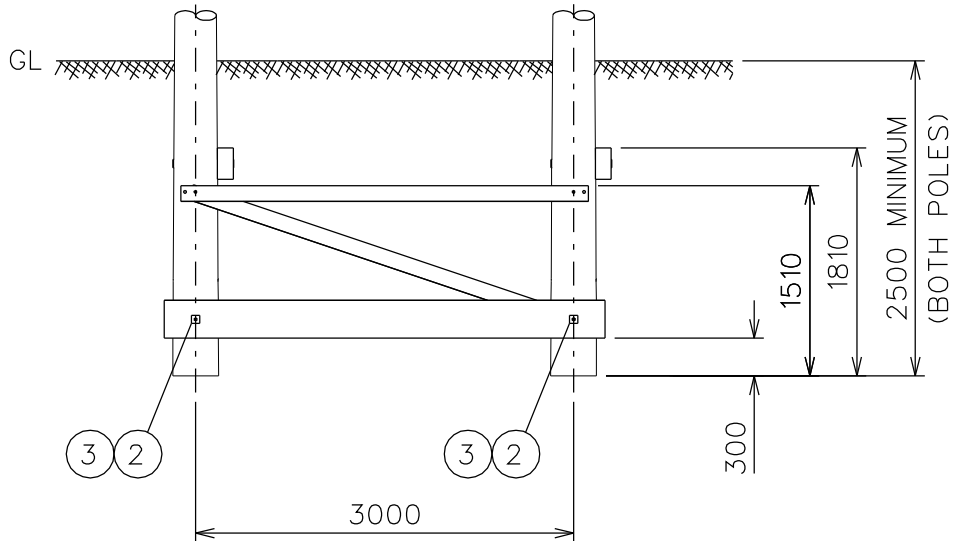

FRONT ELEVATION

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1	"H" Pole Timber Baulk	LSTC/STD/PAR/601	1	135	Timber Baulk "D" in addition to LSTC/STD/GNA/508
2	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	1.5	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3	Square Flat Washer	LSTC/STD/PAR/619	2	0.1	Flat Washers in addition to LSTC/STD/GNA/508
4					
5					
6					
7					
8					

Total Additional Calculated Weight = 138Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "POOR" SOIL CONDITIONS ARE ENCOUNTERED.
THESE FOUNDATIONS CAN ONLY BE INSTALLED IN LEVEL GROUND.
TO BE READ IN CONJUNCTION WITH:
LSTC/STD/GNA/508: 20-35° ANGLE STRUCTURE
LSTC/STD/GNA/510: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT	PowerSystems	TITLE	SCALE 1:60		ORIGINAL SIZE A4		LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
			(UNLESS OTHERWISE STATED)				
DATE 11/05/05			CHECKED GS				
DRAWN R.F.			APPROVED PP				
DRAWING NUMBER			REV				
SPECIFICATION	OHL-03-132	ADDITIONAL MATERIAL - 20-35° ANGLE STRUCTURE POOR SOIL CONDITIONS	LSTC/STD/GNA/796		3		