



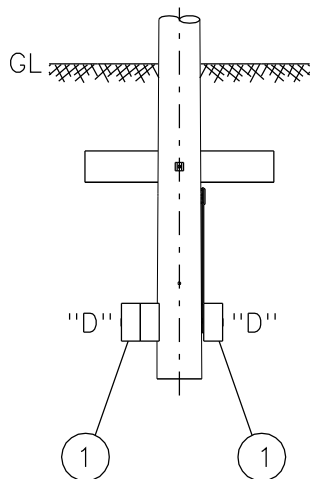

SIDE VIEW

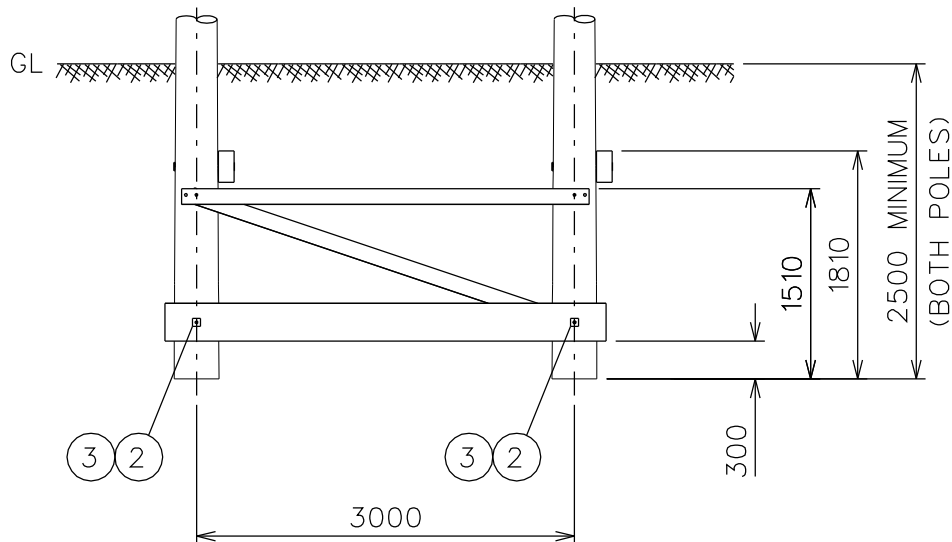

FRONT ELEVATION

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1	"H" Pole Timber Baulk	LSTC/STD/PAR/601	2	135	Timber Baulk "D" in addition to LSTC/STD/GNA/511
2	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.0	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3	Square Flat Washer	LSTC/STD/PAR/619	2	0.1	Flat Washers in addition to LSTC/STD/GNA/511
4					
5					
6					
7					
8					

Total Additional Calculated Weight = 275Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "POOR" SOIL CONDITIONS ARE ENCOUNTERED.
THESE FOUNDATIONS CAN ONLY BE INSTALLED IN LEVEL GROUND.
TO BE READ IN CONJUNCTION WITH:
LSTC/STD/GNA/511: 2 POLE TERMINAL
LSTC/STD/GNA/513: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT	PowerSystems	TITLE	SCALE 1:60 (UNLESS OTHERWISE STATED)		ORIGINAL SIZE A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
			DATE 11/05/05	CHECKED GS		
SPECIFICATION	OHL-03-132	ADDITIONAL MATERIAL TERMINAL STRUCTURE POOR SOIL CONDITIONS	DRAWN R.F.	APPROVED PP		
			DRAWING NUMBER LSTC/STD/GNA/798	REV 3		