


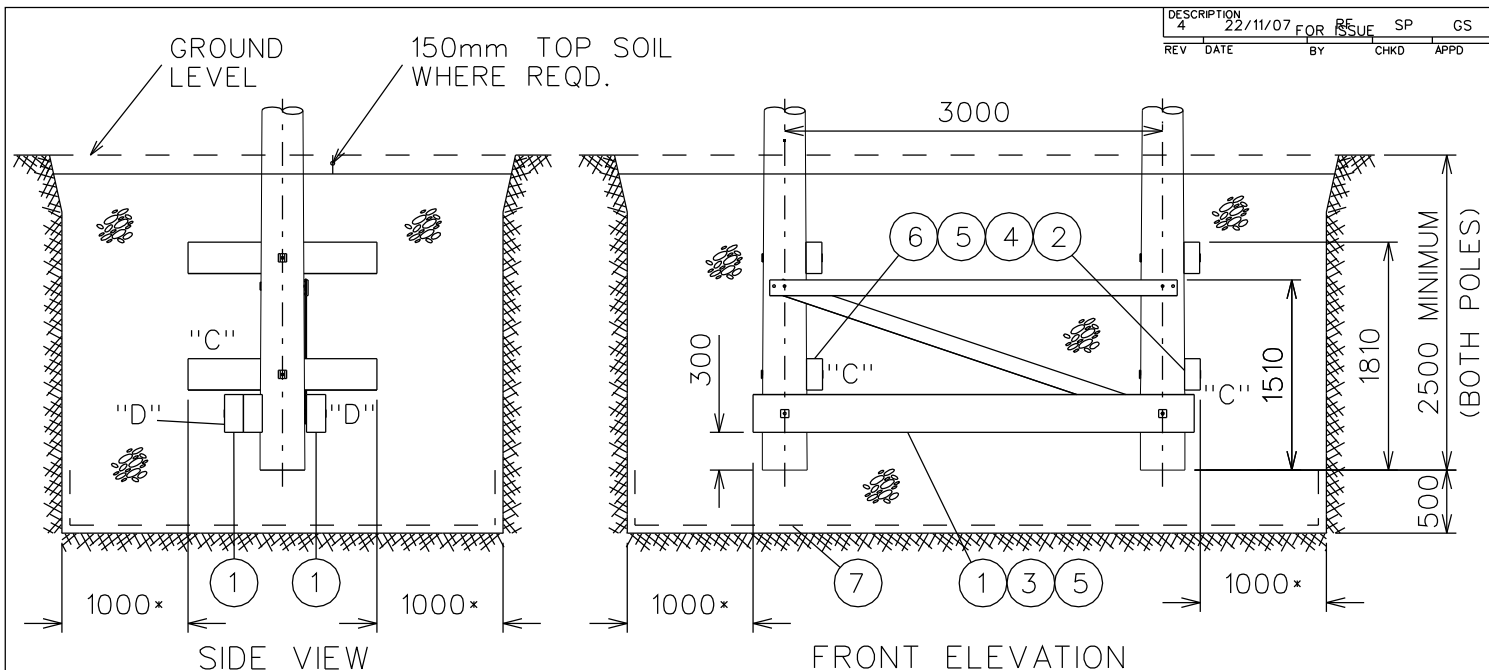

	ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1	"H" Pole Timber Baulk	LSTC/STD/PAR/601	2	135	Timber Baulk "D" in addition to LSTC/STD/GNA/511
2	Foundation Block	LSTC/STD/PAR/602	2	40	Foundation Block "C" in addition to LSTC/STD/GNA/511
3	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.0	M20 Bolts to attach additional Timber Baulk "D" to Foundation
4	M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	0.5	M20 Bolts to attach additional Foundation Block
5	Square Flat Washer	LSTC/STD/PAR/619	4	0.1	Flat Washers in addition to LSTC/STD/GNA/511
6	Square Curved Washer	LSTC/STD/PAR/620	2	0.1	Curved Washers in addition to LSTC/STD/GNA/511
7	Geotextile Membrane	--	1	--	Place in Bottom of Excavation Prior to Granular Backfill

Total Additional Calculated Weight = 356Kg

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "VERY POOR" SOIL CONDITIONS ARE ENCOUNTERED.
THESE FOUNDATIONS CAN ONLY BE INSTALLED IN LEVEL GROUND.
TO BE READ IN CONJUNCTION WITH:
LSTC/STD/GNA/511: 2 POLE TERMINAL
LSTC/STD/GNA/513: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION
- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT	PowerSystems	TITLE	ADDITIONAL MATERIAL TERMINAL STRUCTURE VERY POOR SOIL CONDITIONS	SCALE	1:60	ORIGINAL SIZE	A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffeld East Yorkshire YO25 5XA 01377 253617				
				(UNLESS OTHERWISE STATED)	DATE	16/05/05	CHECKED		GS			
SPECIFICATION	OHL-03-132			DRAWN	R.F.	APPROVED	PP					
				DRAWING NUMBER		LSTC/STD/GNA/799			REV	4		