



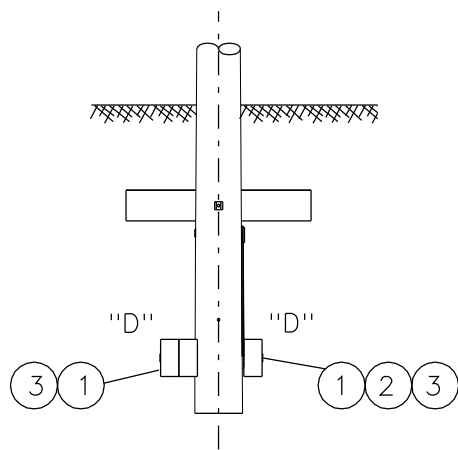

SIDE VIEW: 14M POLES

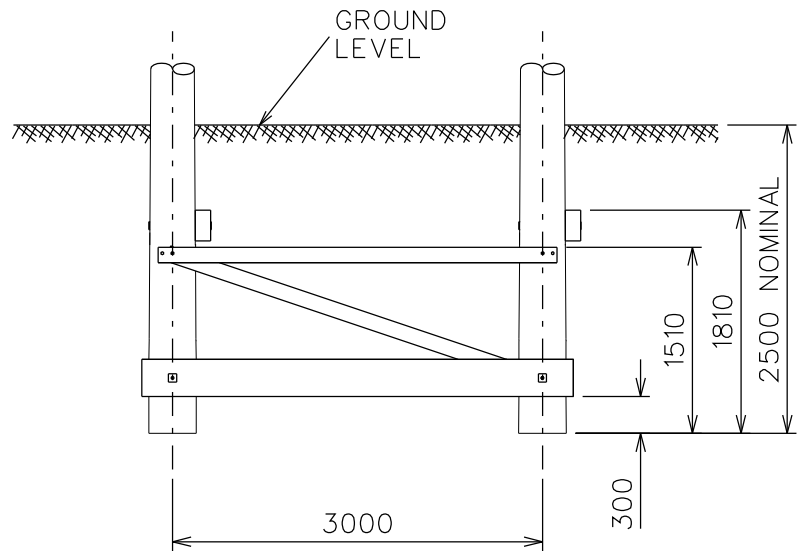

14M POLE FRONT ELEVATION

ITEM - DESCRIPTION	REFERENCE No.	QTY REQ'D	WEIGHT EACH (Kg)	REMARKS
1 Timber Baulk	LSTC/STD/PAR/601	2	135	Timber Baulk "D" in addition to LSTC/STD/GNA/546 & 547
2 M20 Bolts x Length To Suit Pole Diameter	LSTC/STD/GNA/555	2	2.0	M20 Bolts to attach additional Timber Baulk "D" to Foundation
3 Square Flat Washer	LSTC/STD/PAR/619	2	0.1	
Total Additional Calculated Weight = 85Kg				

GENERAL NOTES:

- ALL STEELWORK TO BE PROTOTYPE CHECK ERECTED PRIOR TO MASS PRODUCTION.
- ALL DIMENSIONS ARE IN MILLIMETRES.
- MATERIAL LIST INDICATES ADDITIONAL ITEMS REQUIRED WHEN "POOR" SOIL CONDITIONS ARE ENCOUNTERED. NOTE ONLY THE 14M POLES REQUIRE FOUNDATION BLOCKS & TIMBER BAULKS. FOUNDATIONS TO BE INSTALLED IN LEVEL GROUND ONLY.

READ IN CONJUNCTION WITH:

LSTC/STD/GNA/545, 546 & 547: 4 POLE TERMINAL
LSTC/STD/GNA/548: MATERIAL LIST
LSTC/STD/GNA/555: BOLT LENGTH DETERMINATION

- IMPORTANT: REFER TO LSTC/STD/GNA/779 SHEETS 1 TO 4 FOR FOUNDATION DESIGN CRITERIA.

SHT 1 : SOIL CLASSIFICATIONS & POLE EMBEDMENT DETAILS.
SHT 2 : FOUNDATION DETAILS / STRUCTURE TYPES.
SHT 3 : FACTORS OF SAFETY.
SHT 4 : OUTLINE DESIGN FOR "VERY POOR" SOIL FOUNDATIONS.

CLIENT PowerSystems	TITLE ADDITIONAL MATERIAL - 4 POLE TERMINAL POOR SOIL CONDITIONS	SCALE 1:60 (UNLESS OTHERWISE STATED) DATE 16/05/05 DRAWN R.F. DRAWING NUMBER LSTC/STD/GNA/813	ORIGINAL SIZE A4 CHECKED GS APPROVED PP REV 3	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Drifffield East Yorkshire YO25 5XA 01377 253617
SPECIFICATION OHL-03-132				