


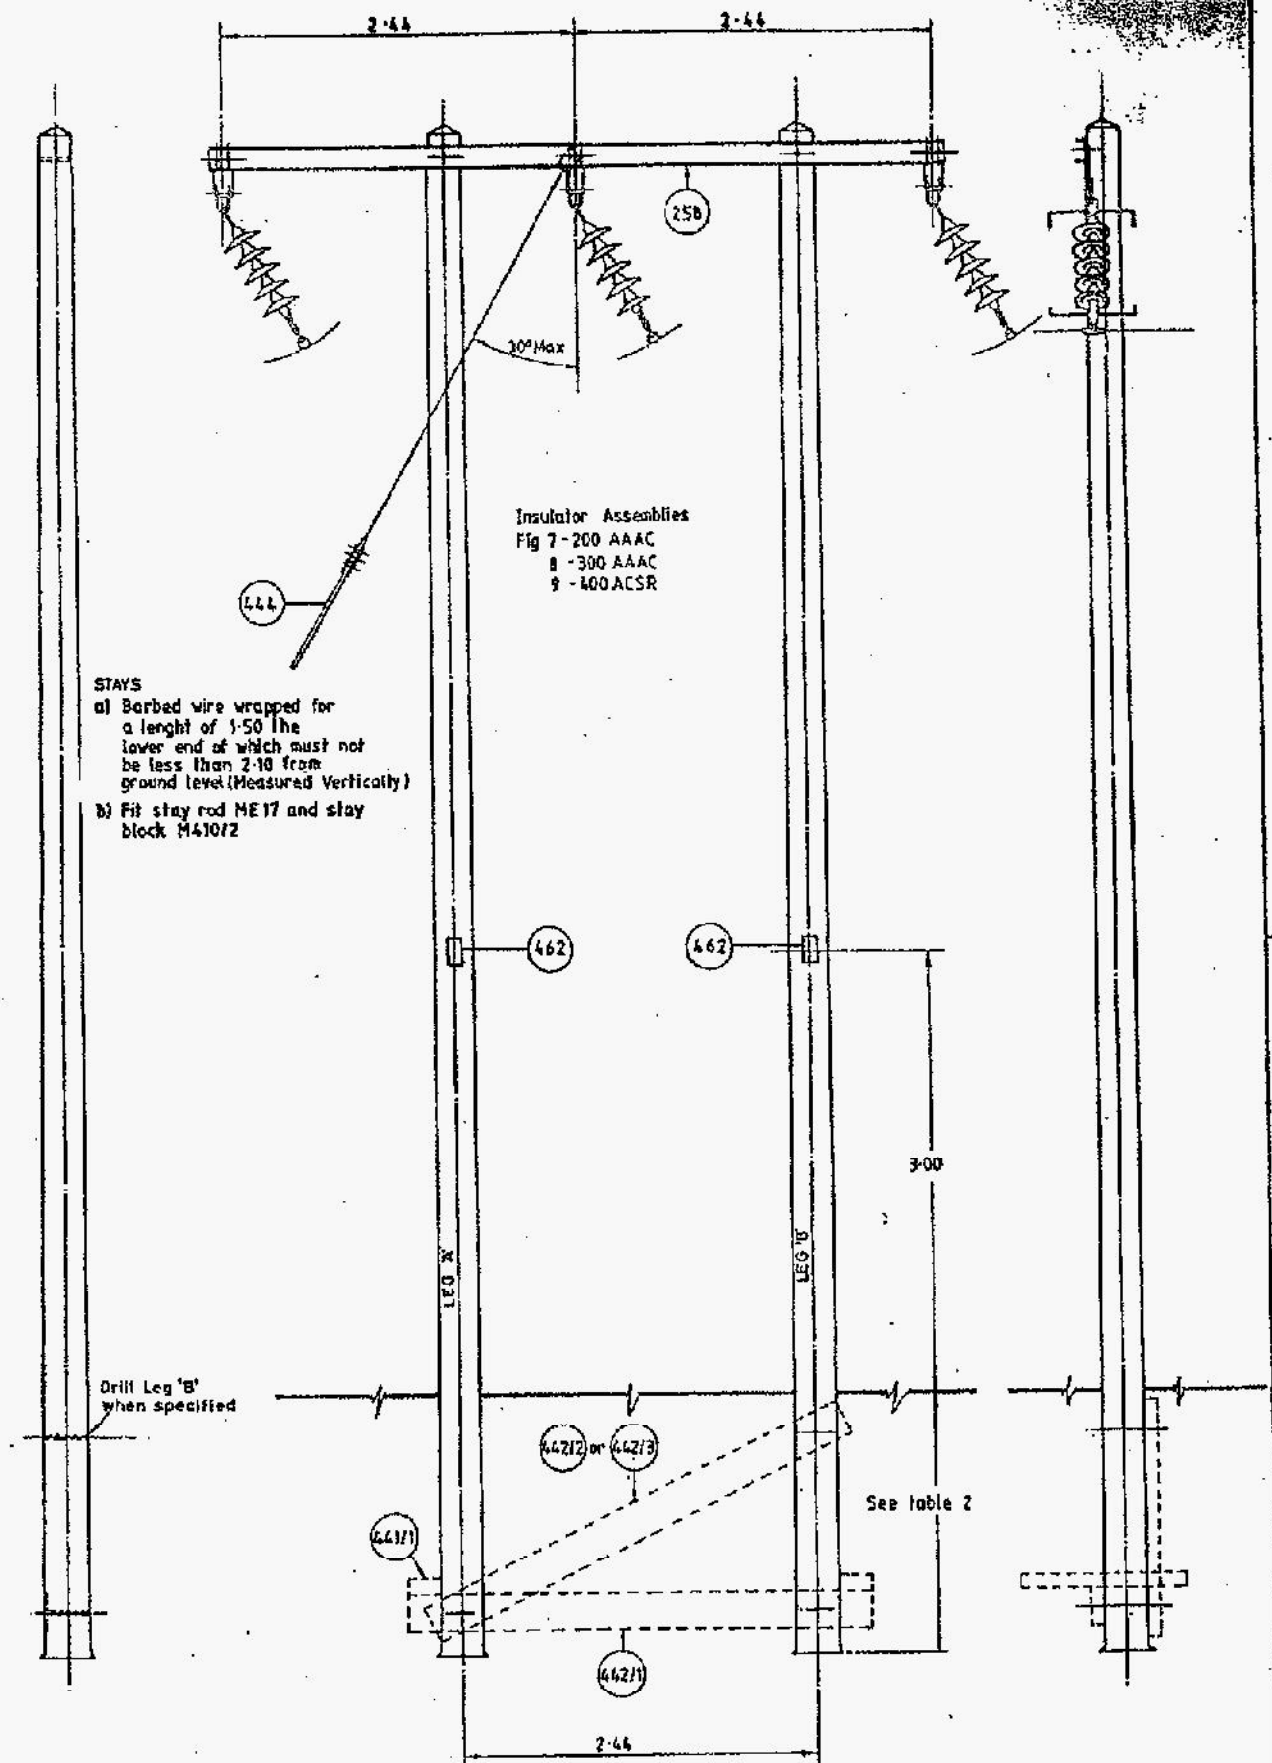

For Pole fabrication
see Fig 1(H)

AS ORG HP 14/2

66kV CONSTRUCTION 'H' SUSPENSION THRO' ANGLES

SCALE	
DATE	27.5.92
DRAWN	F. A. H.
TRACED	L. F. C.
CHECKED	
APPROVED	

MEB
Midlands Electricity plc

FIG. 3.

MATERIAL SCHEDULE FIG 3 (NF14/2)

ITEM	MIN	QUANTITY
Pole (size to be specified)	SPECIAL	2
Crossarm all Conductors	3452580	1
Gusset Plate	3451050	3
'U' Link	3451000	3
Ball Ended Eye Link 70KN MFL	3451330	3
Disc Insulator Porcelain 70KN MFL	3450851	) 15
Glass 70KN MFL	3450852	
Socket Tongue 70KN MFL	3450880	
Suspension Clamp 200 AAAC Conductors	3454931	) 3
300 AAAC Conductors	3454932	
400 ACSR Conductors	3454933	
Arc Horn Live End	3450891	3
Dead End	3450892	3
Safety Sign Dirs 3, 5 and 8	3454621	) 2
Dirs 1, 4 and 7	3454622	
Foundation Blocks (if required)		
1.25m x 250 x 100	3454412	2
3.5m x 250 x 100	3454421	1
3.23m x 250 x 100 Poles up to 14m	3454422	) 1
3.38m x 250 x 100 Poles over 14m	3454423	
Assembly Bolts M20 x 45	3452661	12
Pole Bolt - Crossarm - M20 x 26	3453633	2
Foundation Bolts (if required)		
M20 x 450	3453636	) 5
M20 x 530	3453637	
M20 x 610	3453638	
M20 x 760	3453639	
Square Flat Washer - M20 x 65	3453170	2-12*
Stay Terminating Strap	3451460	1
Stay Wire 19/3.55-700 Grade	3454562	AR
Dead End Stay Grip	3452703	4
Stay Insulator	3454450	1
Stay Rod	3450172	1
Stay Block	3454102	1
Stay Thimble	3451152	4
* With Foundation Blocks		