


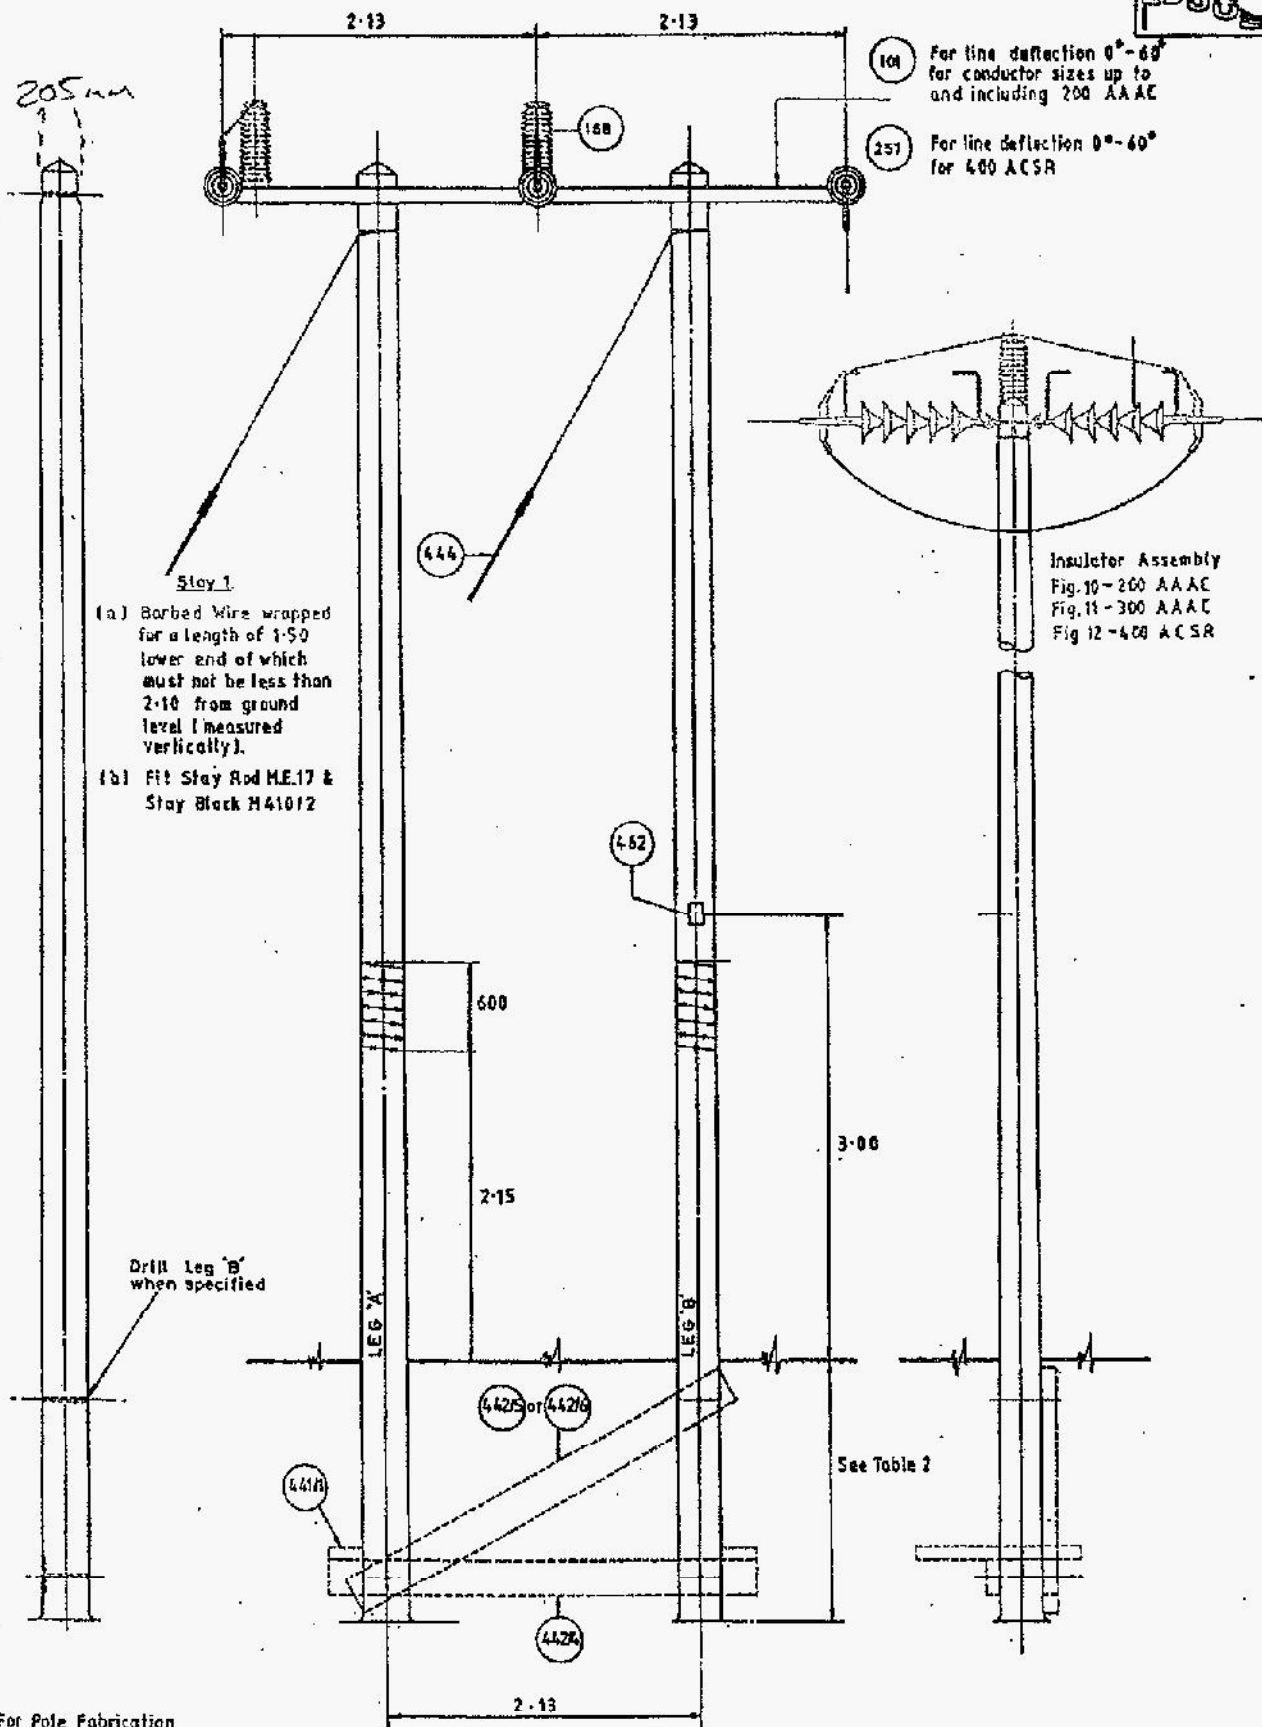

For Pole Fabrication
See Fig 1 (H)

AS DRG MP 1413

66 kV CONSTRUCTION
'H' SECTION POLE

SCALE	
DATE	27-5-92
DRAWN	E.A.H.
TRACED	J.P.
CHECKED	
APPROVED	

MEB
Midlands Electricity plc

FIG. 4.

MATERIAL SCHEDULE FIG 4 (MF14/3)

ITEM	MIN	QUANTITY
Pole (size to be specified)	SPECIAL	2
Crossarm 200 AAAC Conductors	3451010	) 1
300 AAAC Conductors)		) or
400 ACSR Conductors)	3452570	1
Insulator Assembly 200 AAAC		
Ball Ended Hook 70KN MFL	3450860	6
Disc Insulator Porcelain 70KN MFL	3450851	)
Glass 70KN MFL	3450852	) 30
Socket Tongue 70KN MFL	3450880	6
Arc Horn Live End	3450893	6
Dead End	3450894	6
Insulator Assembly 300 AAAC + 400 ACSR		
Shackle 125KN MFL	3452500	6
Ball Ended Eye Link 125KN MFL	3452490	6
Disc Insulator Porcelain 125KN MFL	3452541	30
300 AAAC Socket Tongue 125KN MFL	3452511	6
or 400 ACSR Socket Clevis 125KN MFL	3455100	6
+ Adaptor 125KN MFL	3453601	6
Arc Horn Live End	3452552	6
Dead End	3452551	6
Conductor Terminating Clamp 200 AAAC 70KN	3455681	)
300 AAAC 125KN	3455684	) 6
400 ACSR	3452531	)
Post Insulator 300 AAAC + 400 ACSR	3453140	) 2
Helical Tie 200 AAAC only	3454768	2
Safety Sign Dirs 3, 5 and 8	3454621	)
Dirs 1, 4 and 7	3454622	) 2
Foundation Blocks (if required)		
1.25m x 250 x 100	3454411	2
3.2m x 250 x 100	3454424	1
2.96m x 250 x 100 Poles up to 14m	3454425	)
or 3.12m x 250 x 100 Poles over 14m	3454426	) 1
Pole Bolt - Crossarm - M20 x 260	3453633	2
Foundation Bolts (if required)		
M20 x 450	3453636	)
M20 x 530	3453637	)
M20 x 610	3453638	) 5
M20 x 760	3453639	)
Square Flat Washer - M20 x 65	3453170	0-12*
Stays - Material/Stay		
Stay Wire - 19/3.55 - 700 Grade	3454562	AR
Stay Insulator	3454450	1
Dead End Stay Grip	3452703	3
Stay Thimble	3451152	3
Stay Rod	3450172	1
Stay Block	3454102	1

* With Foundation Blocks