


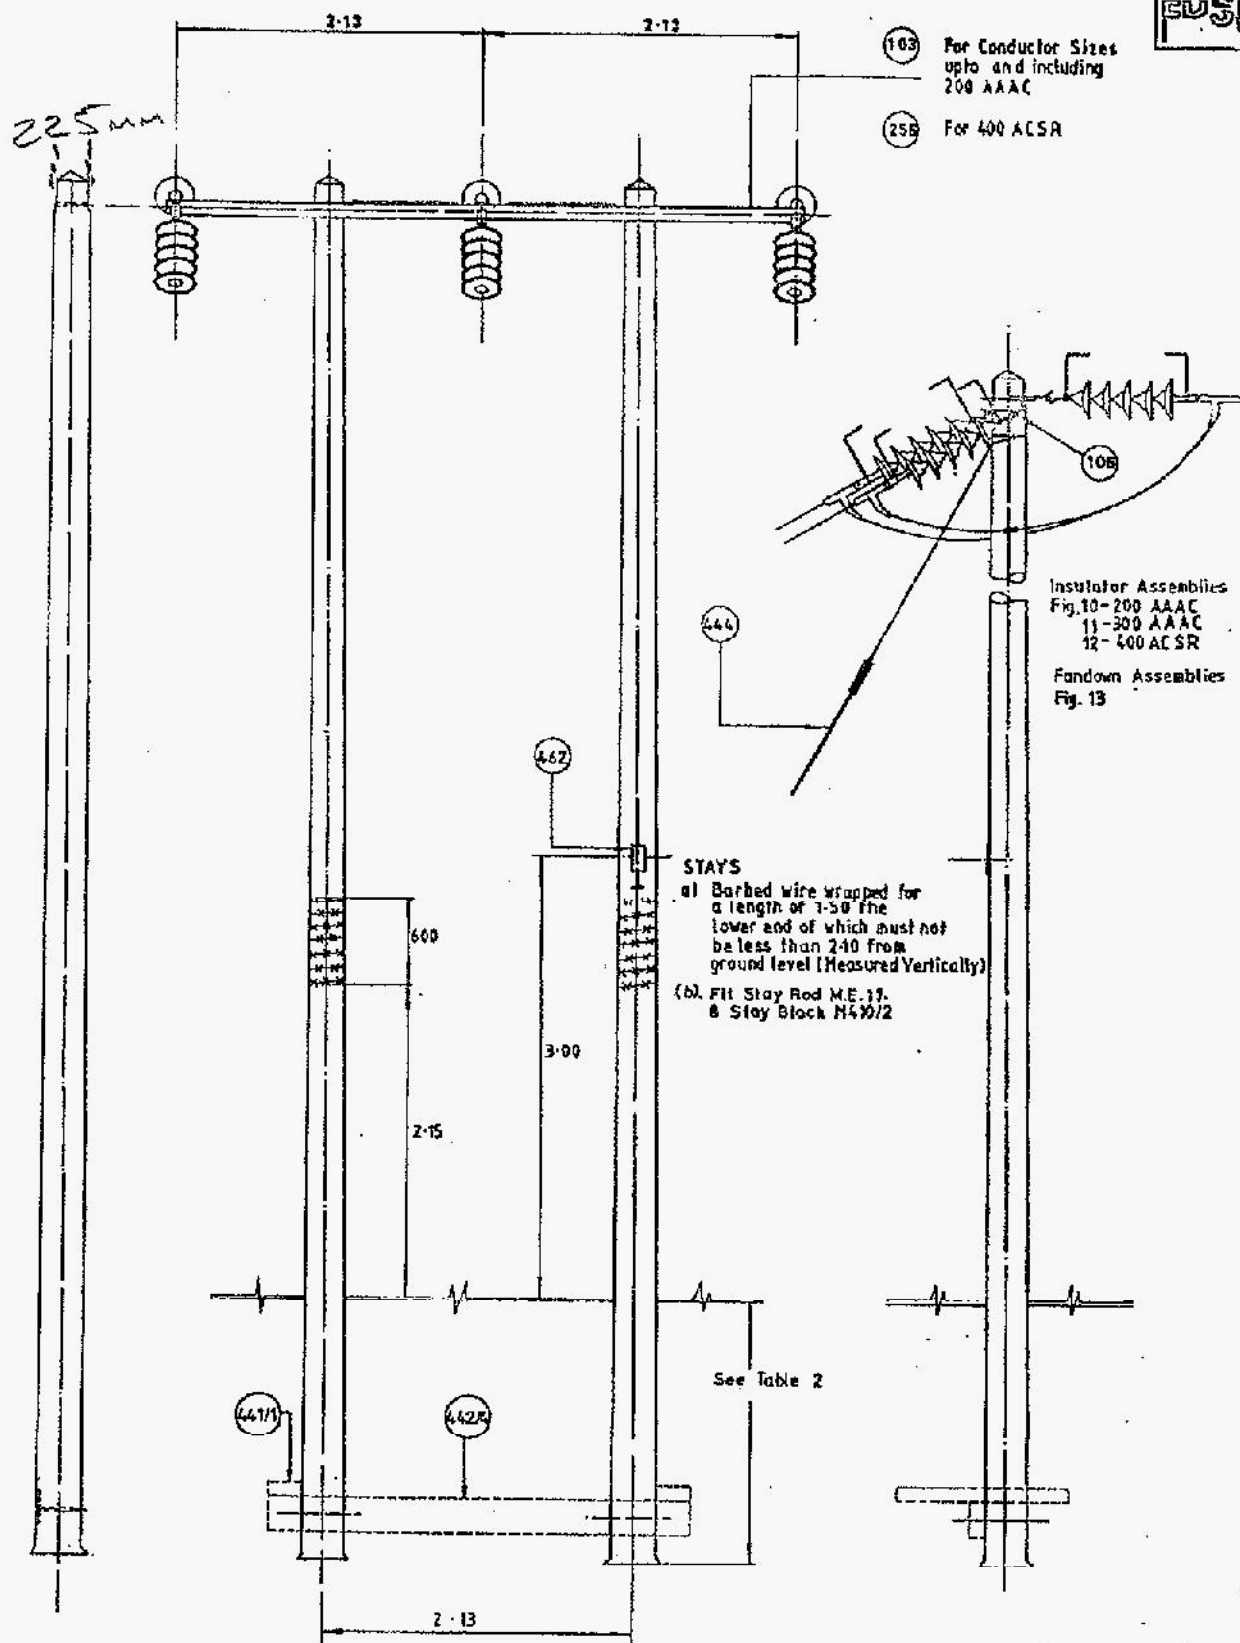

For Pole Fabrication
See Fig. 1(H)

AS DRG MP 1674

66kV. CONSTRUCTION
H. TERMINAL POLE

SCALE	
DATE	27.5.92
DRAWN	W. B.
TRACED	S. J. H.
CHECKED	
APPROVED	

m&B
Midlands Electricity plc

FIG 5

MATERIAL SCHEDULE FIG 5 (MF14/4)

ITEM	MIN	QUANTITY
Pole (size to be specified)	SPECIAL	2
Crossarm 200 AAAC Conductors	3451030	)
300 AAAC Conductors)		) 1
400 ACSR Conductors)	3452570	)
<u>Insulator Assembly 200 AAAC</u>		
Ball Ended Hook 70KN MFL	3450860	3
Disc Insulator Porcelain 70KN MFL	3450851	)
Glass 70KN MFL	3450852	) 15
Socket Tongue 70KN MFL	3450880	3
Arc Horn Live End	3450893	3
Dead End	3450894	3
<u>Insulator Assembly 300 AAAC + 400 ACSR</u>		
Shackle 125KN MFL	3452500	3
Ball Ended Eye Link 125KN MFL	3452490	3
Disc Insulator Porcelain 125KN MFL	3452541	15
300 AAAC Socket Tongue 125KN MFL	3452511	3
OR 400 ACSR Socket Clevis 125KN MFL	3455100	3
+ Adapter 125KN MFL	3453601	3
Arc Horn Live End	3452552	3
Dead End	3452551	3
Conductor Terminating Clamp 200 AAAC 70KN	3455681	)
300 AAAC 125KN	3455684	) 3
400 ACSR	3452531	)
NOTE: FANDOWN MATERIALS SEE FIG 13		
Safety Sign Dirs 3, 5 and 8	3454621	)
Dirs 1, 4 and 7	3454622	) 2
Foundation Blocks (if required)		
1.25m x 250 x 100	3454411	2
3.2m x 250 x 100	3454424	1
Pole Bolt - Crossarm M20 x 260	3453633	2
Foundation Bolts (if required)		
M20 x 450	3453636	)
M20 x 530	3453637	) 4
M20 x 610	3453638	)
Square Flat Washer - M20 x 65	3453170	0-8*
Stay Materials/Stay		
Stay Wire - 19/3.55 - 700 Grade	3454562	AR
Stay Insulator	3454450	1
Dead End Stay Grip	3452703	3
Stay Thimble	3451152	3
Stay Rod	3450172	1
Stay Block	3454102	1
* With Foundation Blocks		