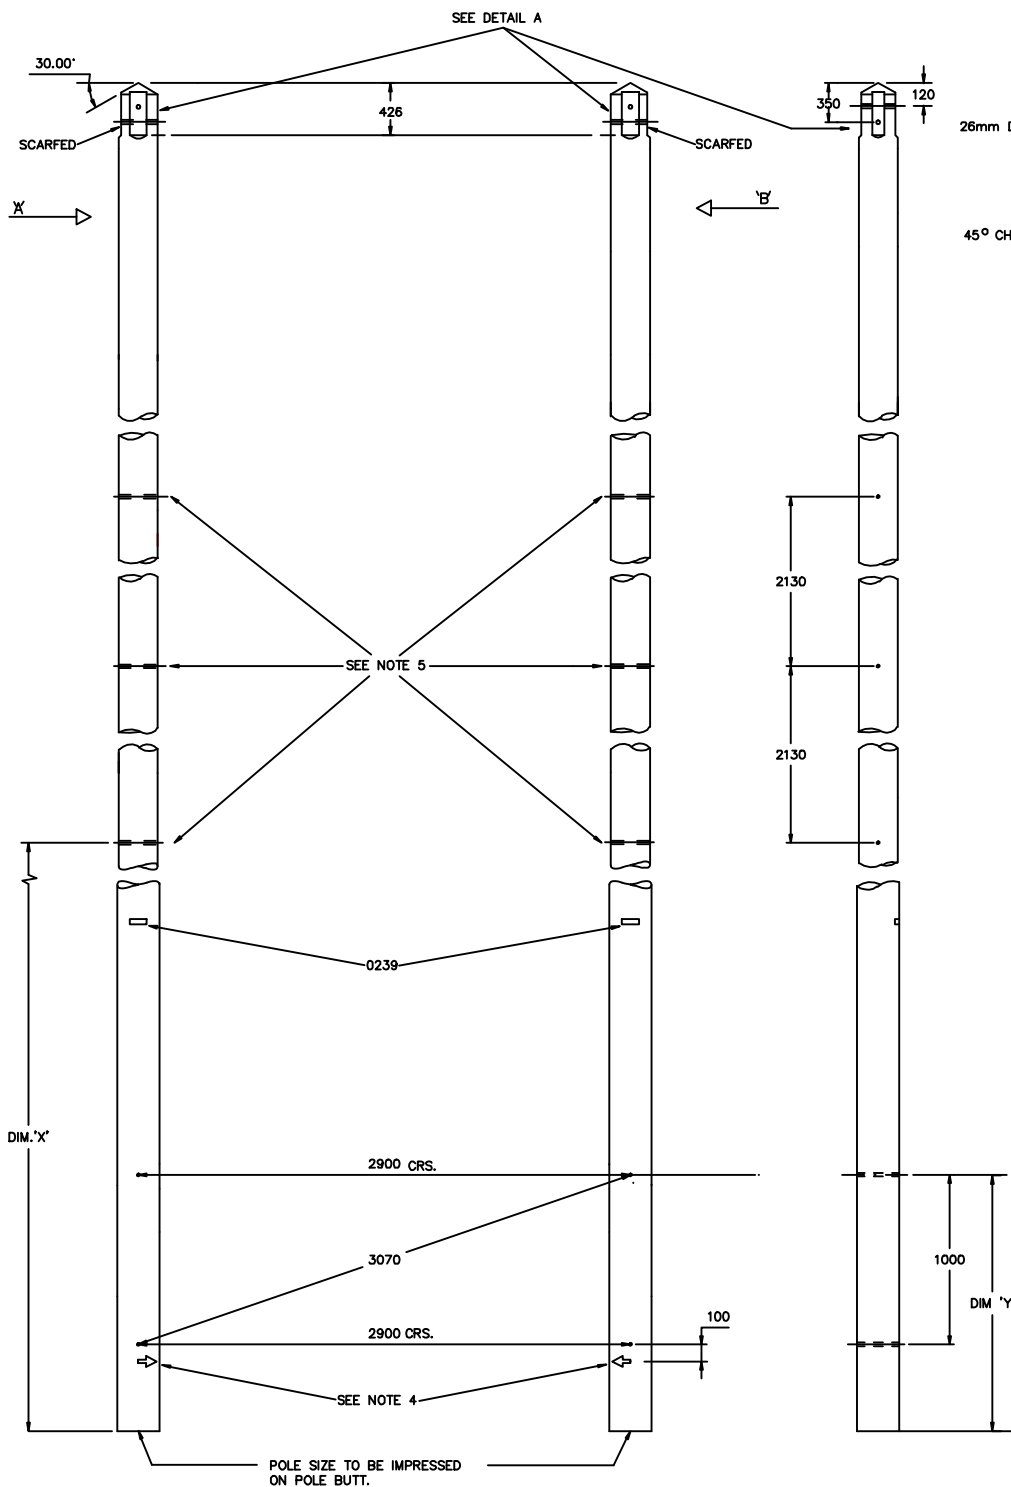


NOTES

- POLE LEGS TO BE MATCHED. POLE TOP MINIMUM DIAMETER BEFORE FABRICATION 'STOUT' - 250mm.
- HOLES TO BE 22mm DIA. EXCEPT AS SHOWN IN DETAIL 'A' (26mm) DRILLED AT RIGHT ANGLES TO VERTICAL CENTRE-LINE OF POLE. ALL DRILLING AND CUTTING TO BE DONE STRICTLY TO TEMPLATE PRIOR TO CREOSOTING.
- POLE BUTTS CUT AT RIGHT ANGLES TO AXIS OF POLE.
- 50x6x6 DEEP ARROW MARK POINTING TOWARDS OPPOSITE POLE LEG TO BE GOUGED ON BRACE BLOCK NOTCHING.
- 'H' POLES 18.0m AND OVER TO BE SUPPLIED COMPLETE WITH A DOUBLE PANEL OF CROSSBRACING TO DRG.No. 1.09.101.129.

All dimensions shown are in millimetres unless stated otherwise

POLE LENGTH	DIM 'X'	DIM 'Y'
UP TO AND INCLUDING 12.0m	—	1500
13.0m—15.0m INCLUSIVE	—	1700
16.0m AND 17.0m	—	1900
18.0m	7955	1900
20.0m	9255	2500
22.0m	10255	2500
24.0m	11255	2500

NEDL		NEDL, Manor House, Station Road, Houghton le Spring, DH4 7LA.	
132kV SINGLE CIRCUIT OVERHEAD LINES DRILLING, SCARFING AND MARKING FOR SECTION / ANGLE 'H' POLE.			
Prepared by S.B.	Org.No. 1 09 138 0003	Sheet No. 2	
Checked R.M.D.	Date Issued JUN '90	Revised JUNE 2000	Scale 1:20 & 1:5
Mod. <i>A/B/C</i>			