
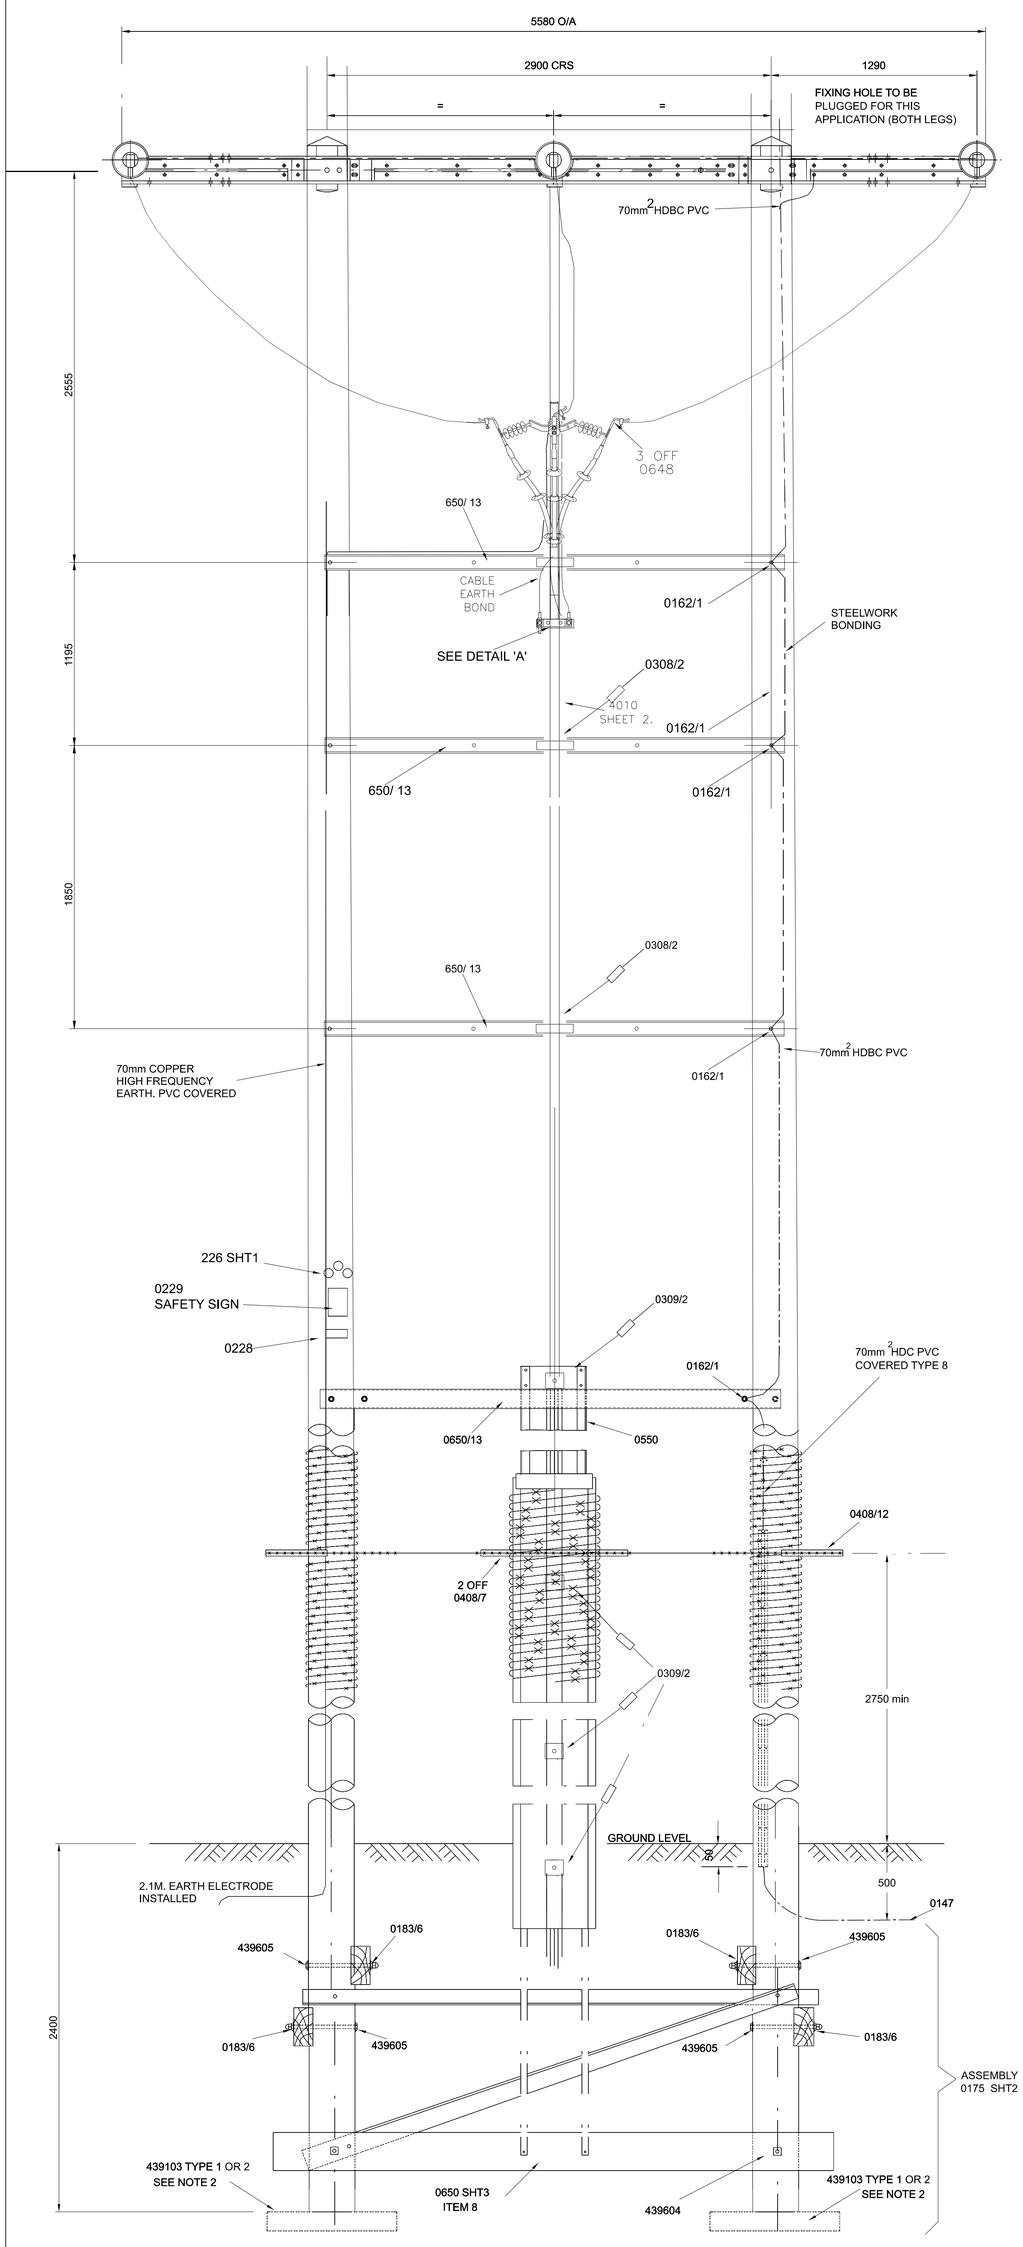
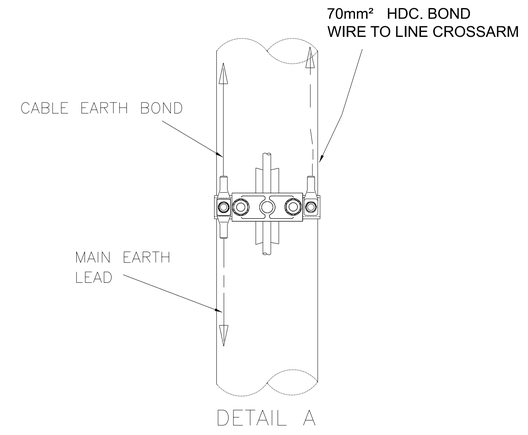
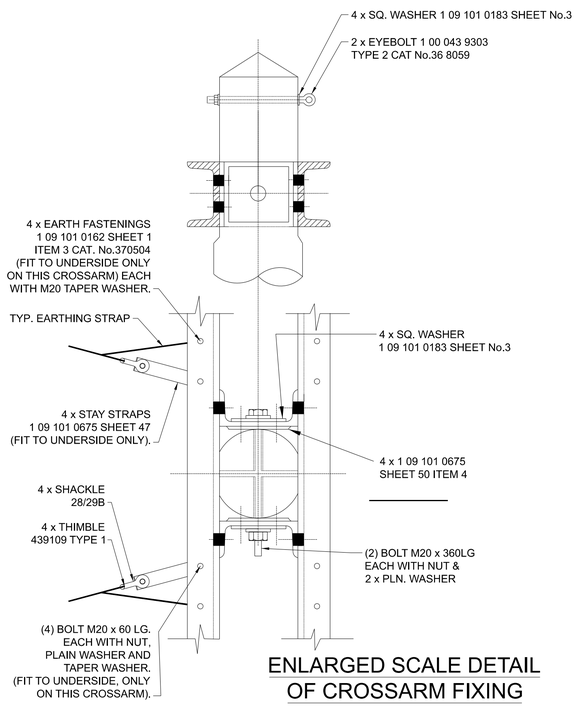
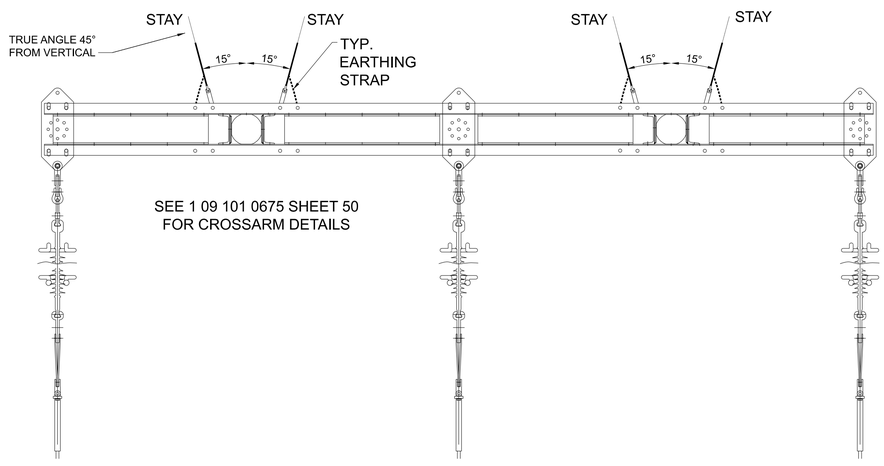



ENLARGED SCALE DETAIL
OF CROSSARM FIXING

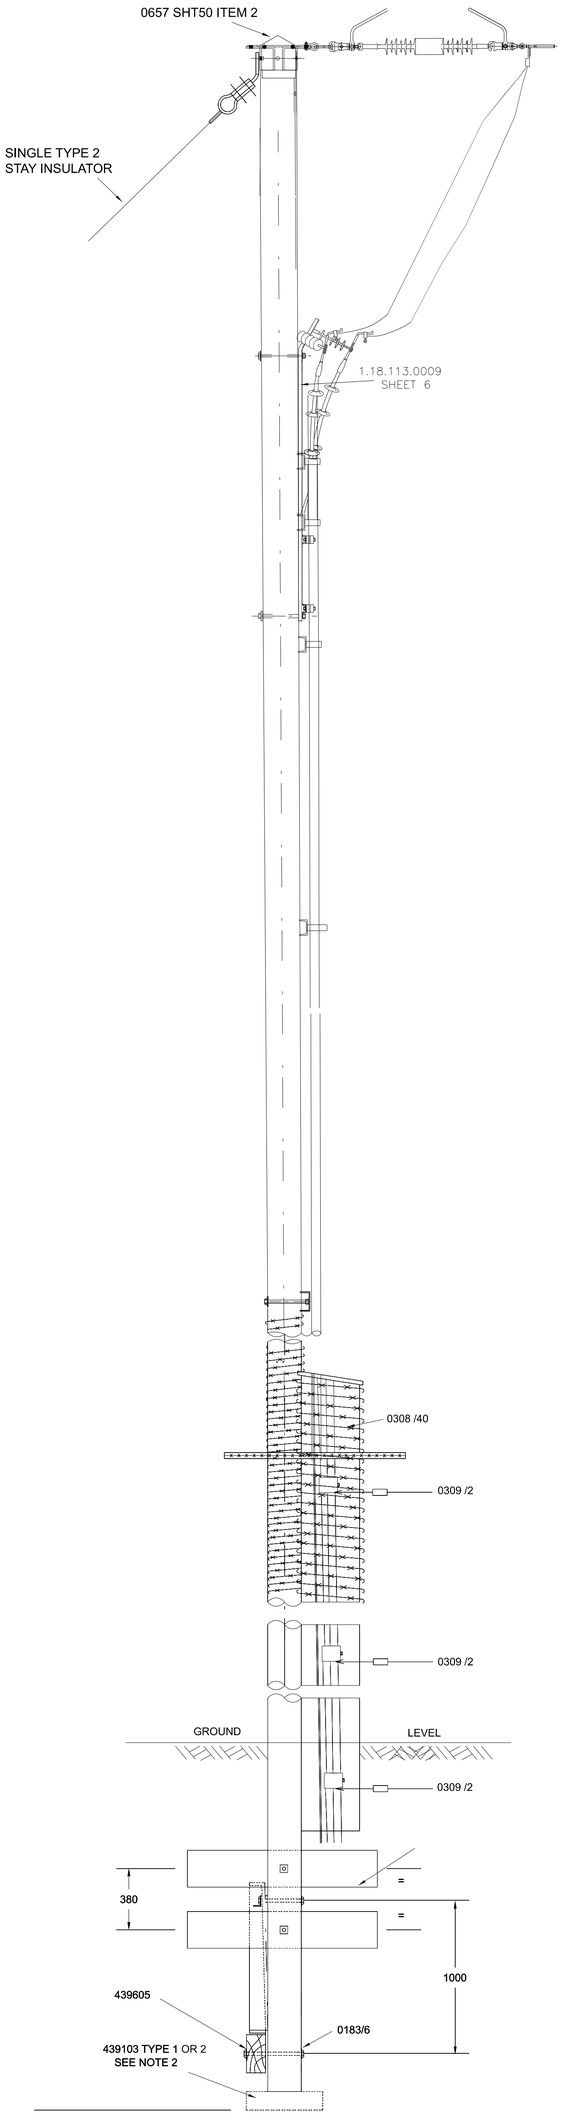


NOTES
1. ALL POLE BOLTS TO BE M20 UNLESS OTHERWISE STATED
2. FOOTING USED WHEN REQUIRED TO CONSIST OF 2 No WOOD BAULKS LAID TOGETHER TO FORM A 500 x 800 BASE AND INSTALLED AT EACH POLE LEG
3. DETAILED DRAWINGS ARE PREFIXED 43..... REFER TO ESI BASED DRAWINGS AND OTHER DETAILED DRAWINGS REFER TO 1.09.101..... SERIES
4. CLEARANCE BETWEEN PHASE AND STEEL WORK OR TIMBER TO BE 700 MIN. CLEARANCE BETWEEN DISSIMILAR PHASES TO BE 1500MIN.
5. ALL STEELWORK FIXING BOLTS TO BE COMPLETE WITH 1 No ROUND WASHER UNDER NUT AND 1 No ROUND WASHER UNDER BOLT HEAD UNLESS SPECIFIED OTHERWISE
6. REFERENCE CROSSSARM FIXING DETAIL INDICATES PLATES DEPLOYED UNDER NORMAL CONDITIONS
7. ARRANGEMENTS NOT NORMALLY USED FOR POLES OF GREATER THAN 17.0m LENGTH.
8. MINIMUM POLE LENGTH TO BE 12m
9. TO BE READ IN CINJUNCTION WITH SHEET 3 OF THIS DRAWING
10. A HIGH FREQUENCY EARTH SHALL BE INSTALLED LOOPED FROM EACH SURGE ARRESTOR DIRECTLY TO A 2.1m. EARTH ELECTRODE.
11. ⊣□⊢ DENOTES SUPPLIED BY CABLE CONTRACTOR.

ALL DIMENSIONS. SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE STATED

NORTHERN POWERGRID

Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF

Manufacturer Details

33KV SINGLE SUPPOERT CIRCUIT OVERHEAD LINES
TERMINAL SUPPORT WITH SINGLE ARRESTORS AND
COLD SHRINK CABLE TERMINATION
(WOODHOUSE MAST REPLACEMENT)

| | |
|---|---|
| Sheet No. 27 | Scale 1:20 |
| Prepared By W7Brian.James | Type OVERHEAD POLES |
| Revised 22/06/23 | Grid Reference |
| Date Issued 22/01/20 | Checked By M WILSON |
| Ref No. C1089483SM | Historic Drg.No. 1091231173 |
| Revision A | Notes EARTH BOND CHANGED TO 70MM, TENSION SET REMOVED, INSULATOR TYPE CORRE |