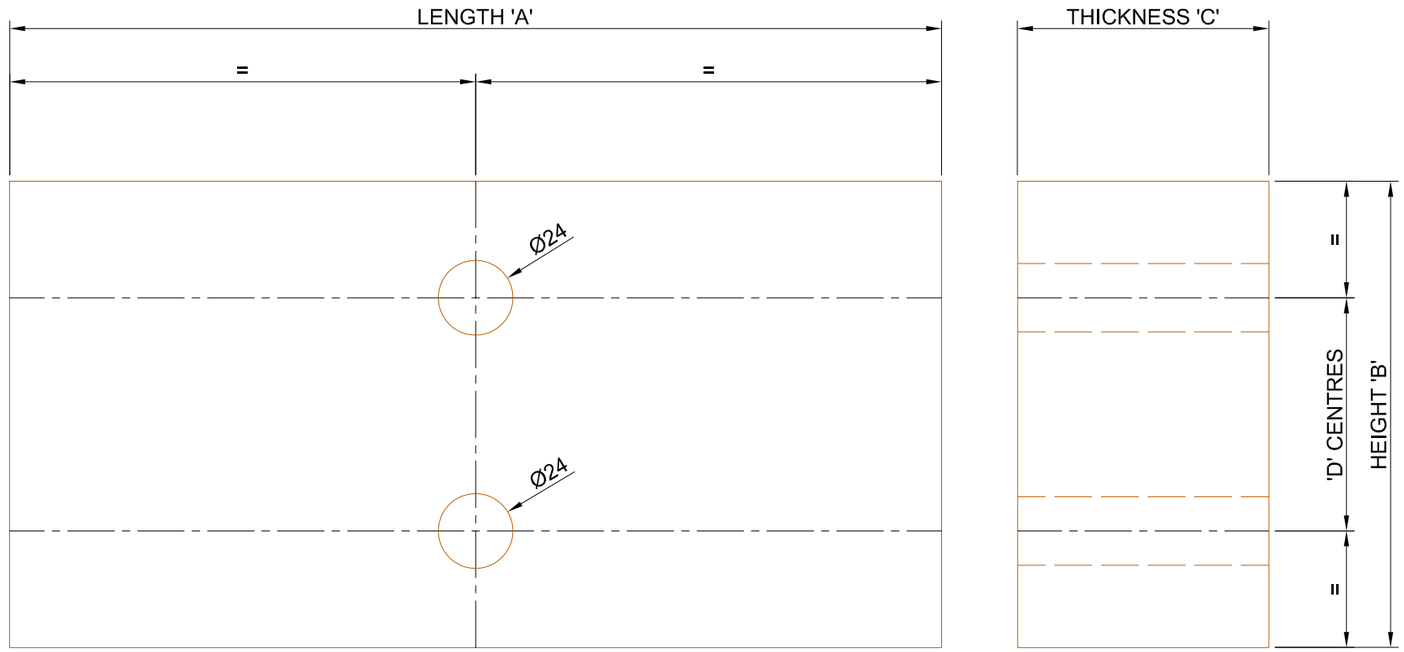


ITEM No.	LENGTH 'A'	HEIGHT 'B'	THICKNESS 'C'	'D' CENTRES	MATERIAL
1	175	300	100	150	ANGELIM PEDRA
2	175	250	100	86	ANGELIM PEDRA
3	1300	250	125	86	PINUS SYLVESTRIS
4	2500	250	125	86	PINUS SYLVESTRIS
5	1300	250	125	150	PINUS SYLVESTRIS
6	2500	250	125	150	PINUS SYLVESTRIS
7	240	300	130	150	ANGELIM PEDRA
8	210	300	130	150	ANGELIM PEDRA
9	2500	250	125	150	PINUS SYLVESTRIS
10	1300	250	125	150	PINUS SYLVESTRIS
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.

NOTES

1. SEE MATERIAL COLUMN IN TABLE. A SUITABLE ALTERNATIVE MAY BE USED PROVIDED IT IS OF SUITABLE STRENGTH & DURABILITY.
2. BLOCKS TO BE CUT FROM SAWN TIMBER.
3. TIMBER GRAIN TO BE LONGITUDINALLY ALONG LENGTH 'A'.
4. LONGITUDINALLY CUT SURFACES TO BE STRAIGHT & CLEAN & ANNUALAR GROWTH RINGS SHALL BE APPROX. PARALLEL.

CE Electric UK

Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF

Manufacturer Details

132kV OVERHEAD LINES
RUTTER TYPE POLE
SHEAR BLOCK SCHEDULE

Sheet No. 30	Scale N.T.S.
Prepared By TREVOR R. WILKIN	Type OVERHEAD
Revised 2/11/07 - TRW	Grid Reference
Date Issued 24/01/06	Checked By DAVE MARSHALL

DOCUMENT_SUB_CLASS

Ref No. 62470B

Historic Drg.No. 1 09 101 0675

Revision 4 Notes ITEMS 7, 8, 9 & 10 ADDED