


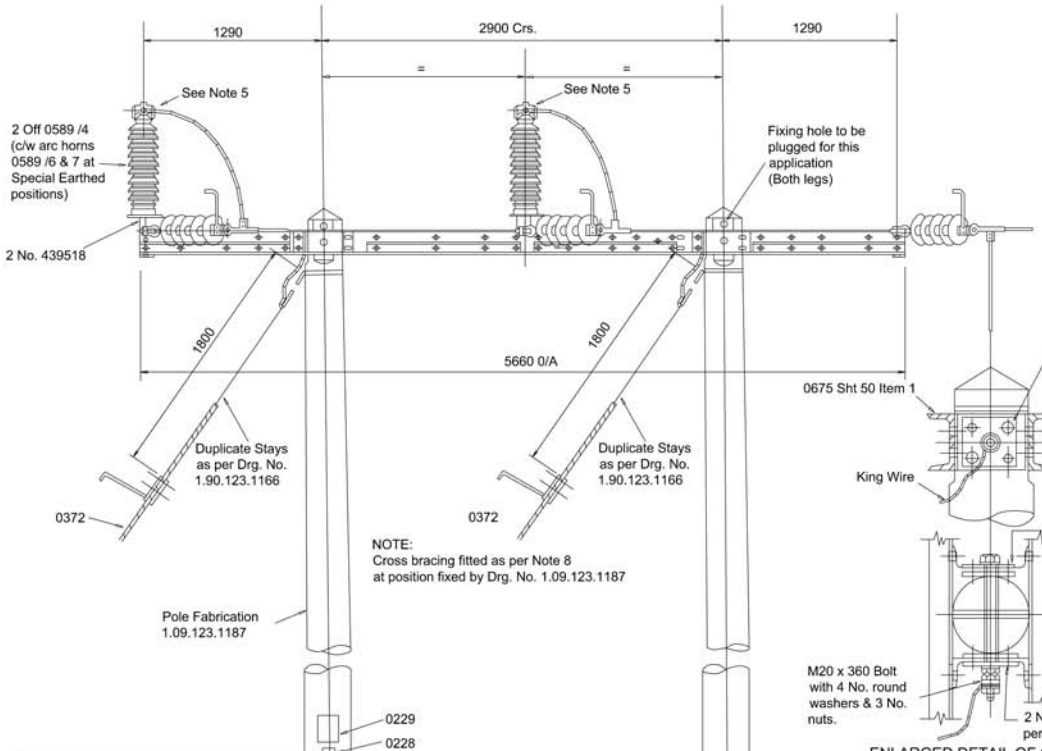


ENLARGED DETAIL OF CROSSARM FIXING
SCALE 1:7.5

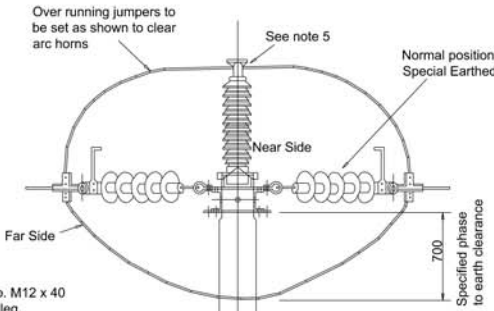

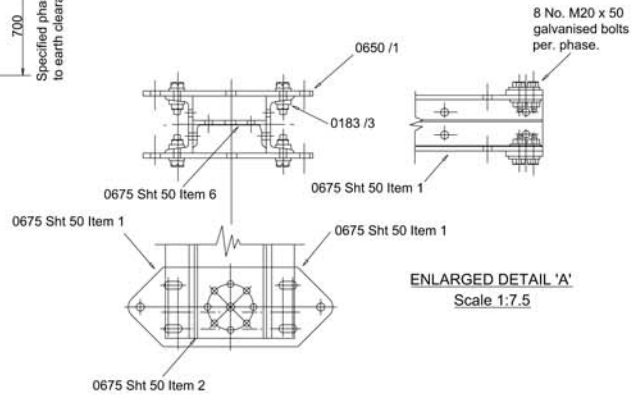

ENLARGED DETAIL 'A'
Scale 1:7.5

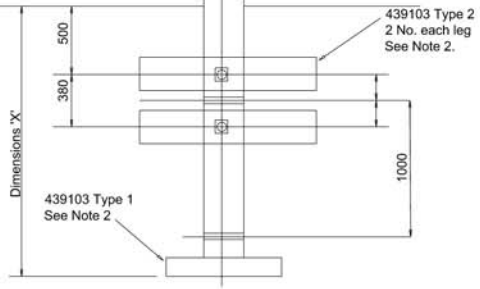

To be read in conjuction with sheet 3 of this drawing.

NOTES:

1. All pole bolts to be M 20 unless otherwise stated.
2. Lower timber baulks may be omitted where good ground conditions warrant it. Footings used when required, to consist of 2 No. Wood Baulks laid together to form 500 x 850 base and installed at each pole leg.
3. Detailed Drgs. prefixed 43.... refer to E.S.I. based drawings and other detailed Drgs. refer to 1. 09. 101 series.
4. Clearance between phase & steelwork or timber to be 700 min. Clearance between dissimilar phases to be 1500 min.
5. Conductor to be taped against chafing over length of clamp at head if Insulator.
6. All steelwork fixing bolts to be complete with 1 No. round washer under nut & 1 No. round washer under bolt head unless specified otherwise.
7. Reference crossarm fixing detail indicates plates deployed under normal conditions.
8. Poles 18.0m and over to be fitted with a double panel of cross - bracing to Drg. No. 1.09.101.0129

POLE LENGTH	Dim 'X'
11.0m and 12.0m	2.0m
13.0m to 15.0m inclusive	2.2m
16.0m and 17.0m	2.4m

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE STATED

Work Spec. No. 04 /228

CE Electric UK
Manufacturer Details

Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF

66KV SINGLE CIRCUIT OVERHEAD LINES
LARGE SECTION ANGLE 'H'
NEW CONSTRUCTION

Sheet No. 4	Scale 1:20	Type OVERHEAD	STANDARDS
Prepared By Joan.Oakley			
Revised 04/06/10	Grid Reference	Ref No. C987604	Historic Drg.No. 1091231162
Date Issued 04/06/10	Checked By G HAMMEL	Revision Notes	