


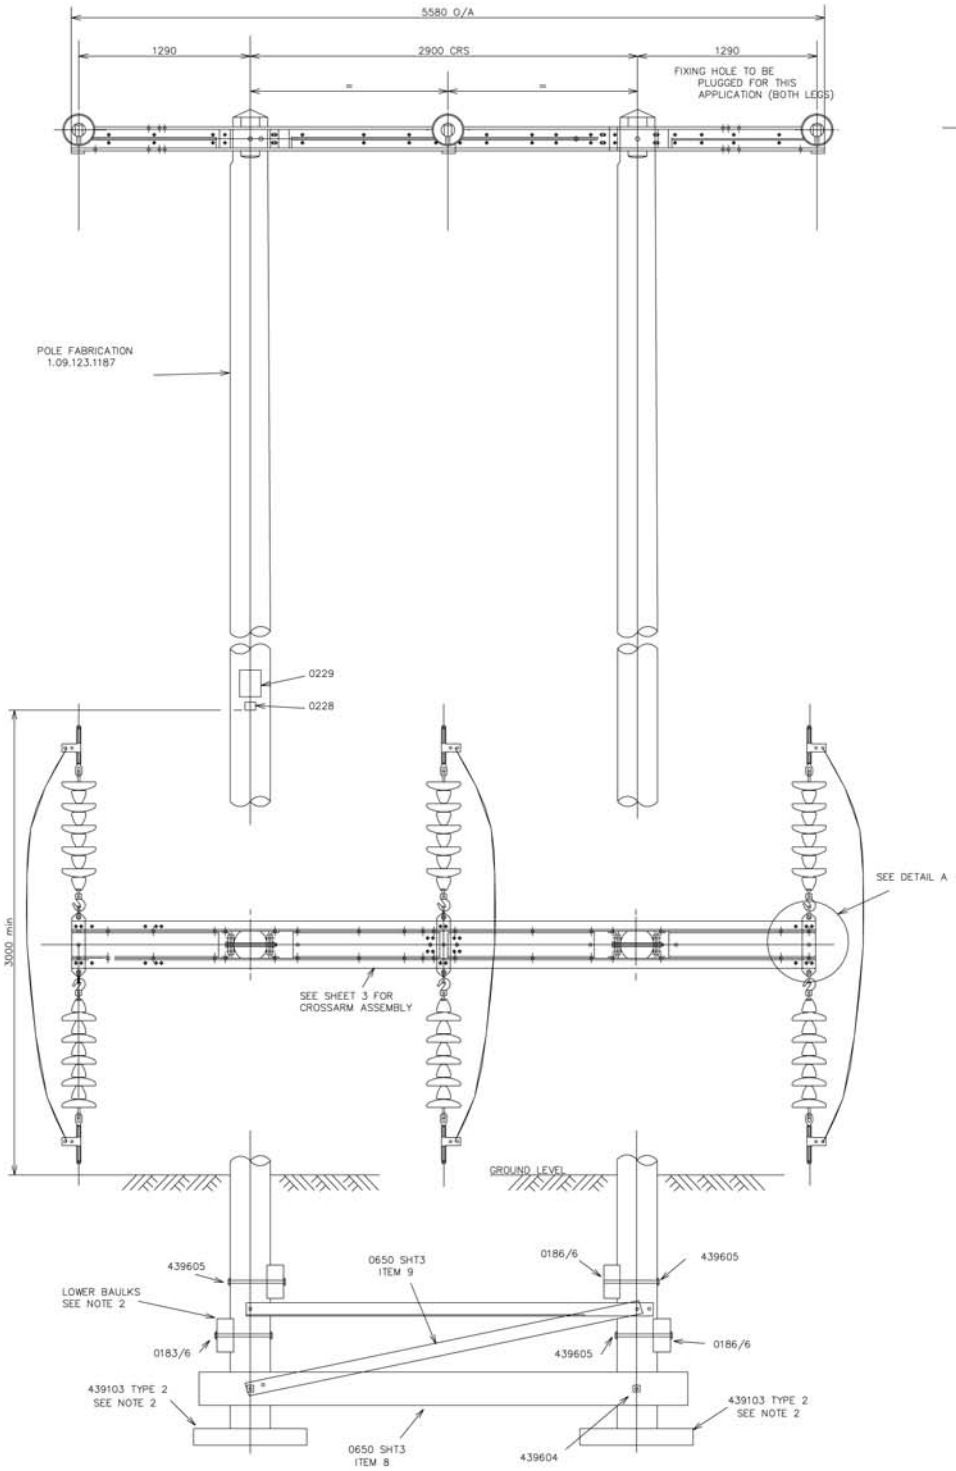


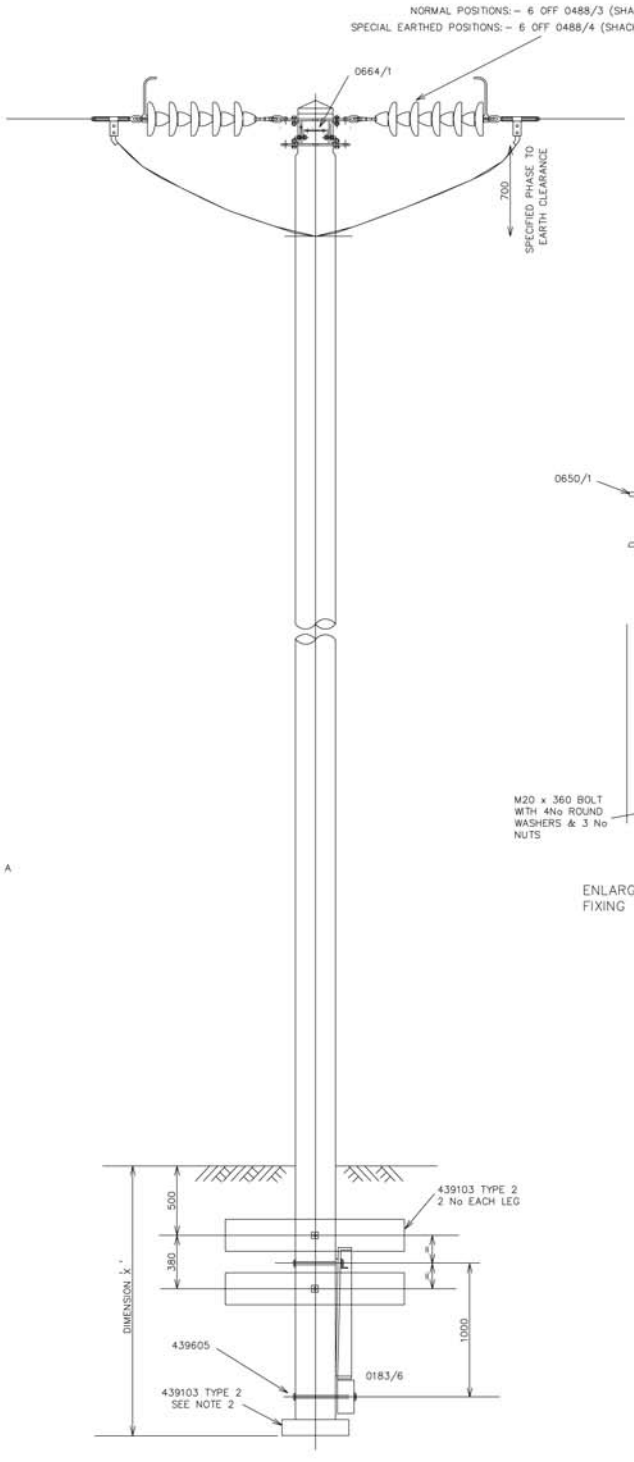

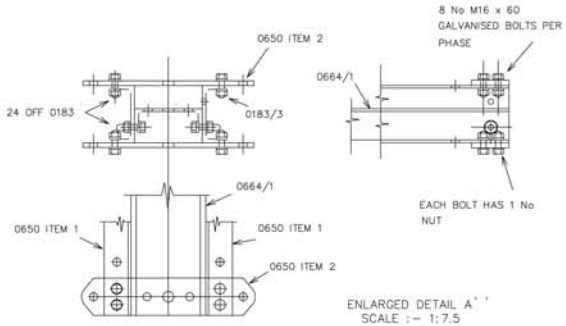

ENLARGED DETAIL 'A'
SCALE :- 1:7.5

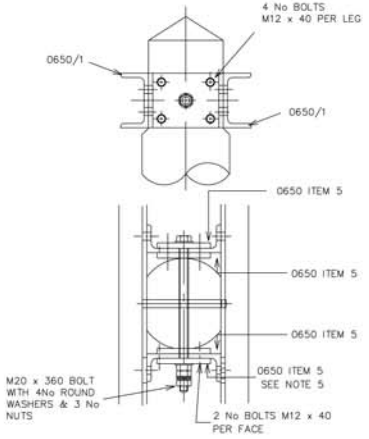

ENLARGED DETAIL OF CROSSARM FIXING SCALE 1:75

NOTES
1. ALL POLE BOLTS TO BE M20 UNLESS OTHERWISE STATED
2. FOOTING USED WHEN REQUIRED TO CONSIST OF 2 No WOOD BAULKS LAID TOGETHER TO FORM 500 x 850 BASE AND INSTALLED AT EACH POLE LEG.
3. DETAILED DRGS PREFIXED 43...REFER TO ESI BASED DRAWINGS AND OTHER DETAILED DRGS REFER TO 1.09.101 SERIES.
4. CLEARANCE BETWEEN PHASE AND STEELWORK OR TIMBER TO BE 700 MIN. CLEARANCE BETWEEN DISSIMILAR PHASES TO BE 1500 MIN.
5. ALL STEELWORK FIXING BOLTS TO BE COMPLETE WITH 1 No ROUND WASHER UNDER NUT AND 1 No ROUND WASHER UNDER BOLT HEAD UNLESS SPECIFIED OTHERWISE.
6. REFERENCE CROSSARM FIXING DETAIL INDICATES PLATES DEPLOYED UNDER NORMAL CONDITIONS.
7. ARRANGEMENTS NOT NORMALLY USED FOR POLES OF GREATER THAN 17.0M LENGTH.

POLE LENGTH	DIM. X
UP TO AND INCLUDING 12.0m	2.0m
13.0m TO 15.0m INCLUSIVE	2.2m
16.0m TO 18.0m INCLUSIVE	2.4m

TO BE READ IN CONJUNCTION WITH SHEET 3 OF THIS DRAWING.

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE STATED.

WORK SPEC No 04/226

NORTHERN ELECTRIC & GAS DISTRIBUTION

Northern Electric Distribution Limited, Carliol House, Newcastle Upon Tyne, NE1 6NE.

66kV SINGLE CIRCUIT OVERHEAD LINES
STRAIGHT LINE SECTION 'H' SUPPORT
NEW CONSTRUCTION

Prepared by S.B.
Checked M.W.
Date Issued

Drg.No. 1 09 123 1163
Mods. A M N

Sheet No. 1
Revised SEP'99(RC)
Scale 1:20