

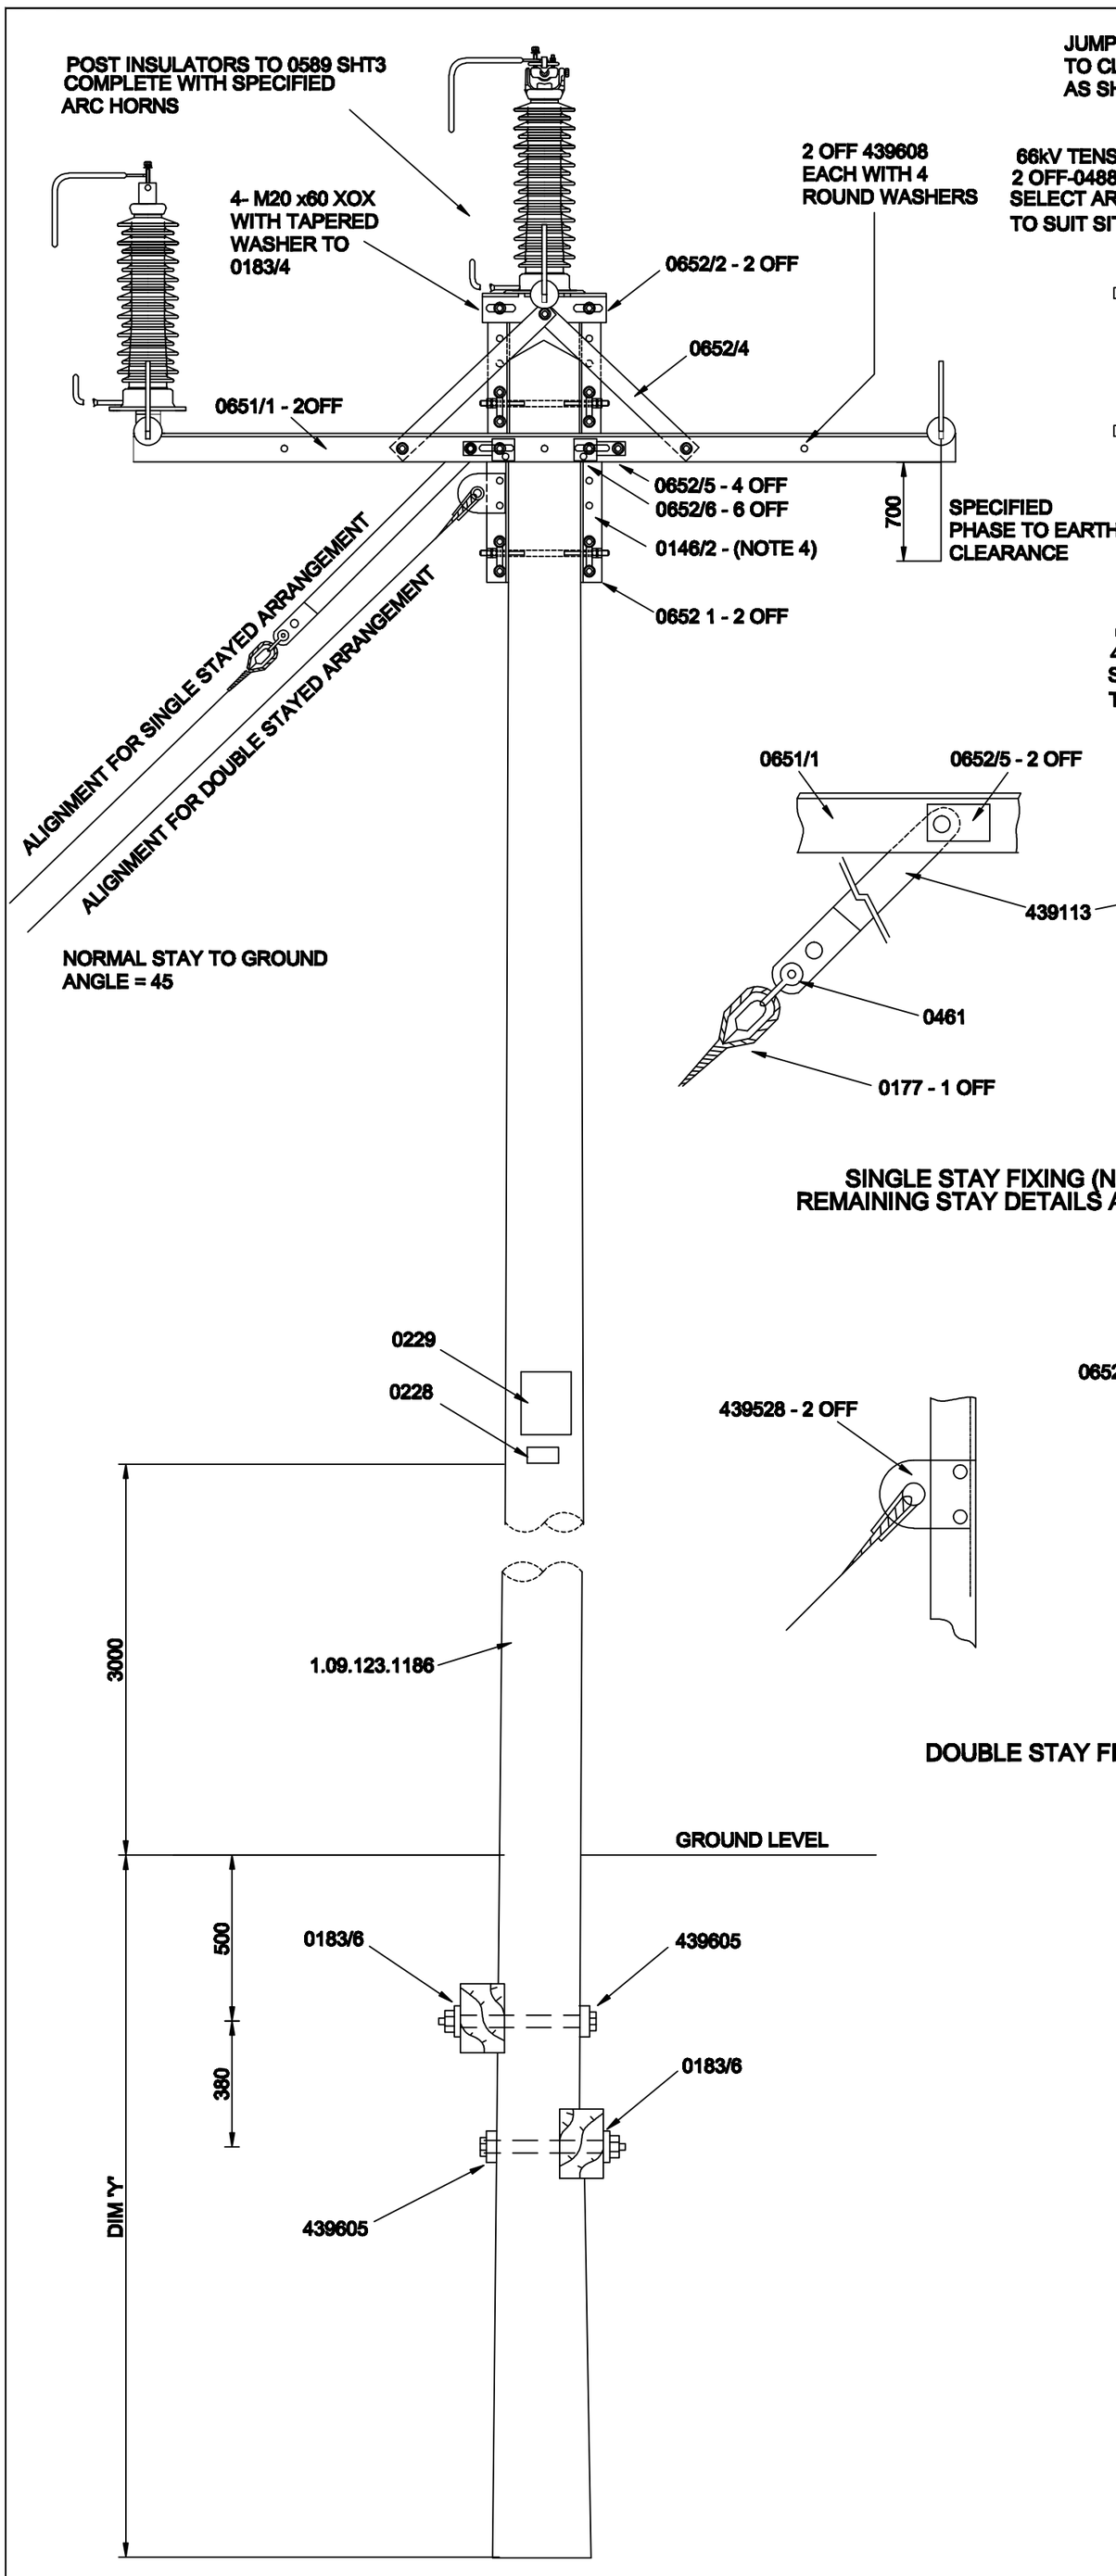


SINGLE STAY FIXING (N.T.S.)
REMAINING STAY DETAILS AS PER 1166

DOUBLE STAY FIXING (N.T.S.)

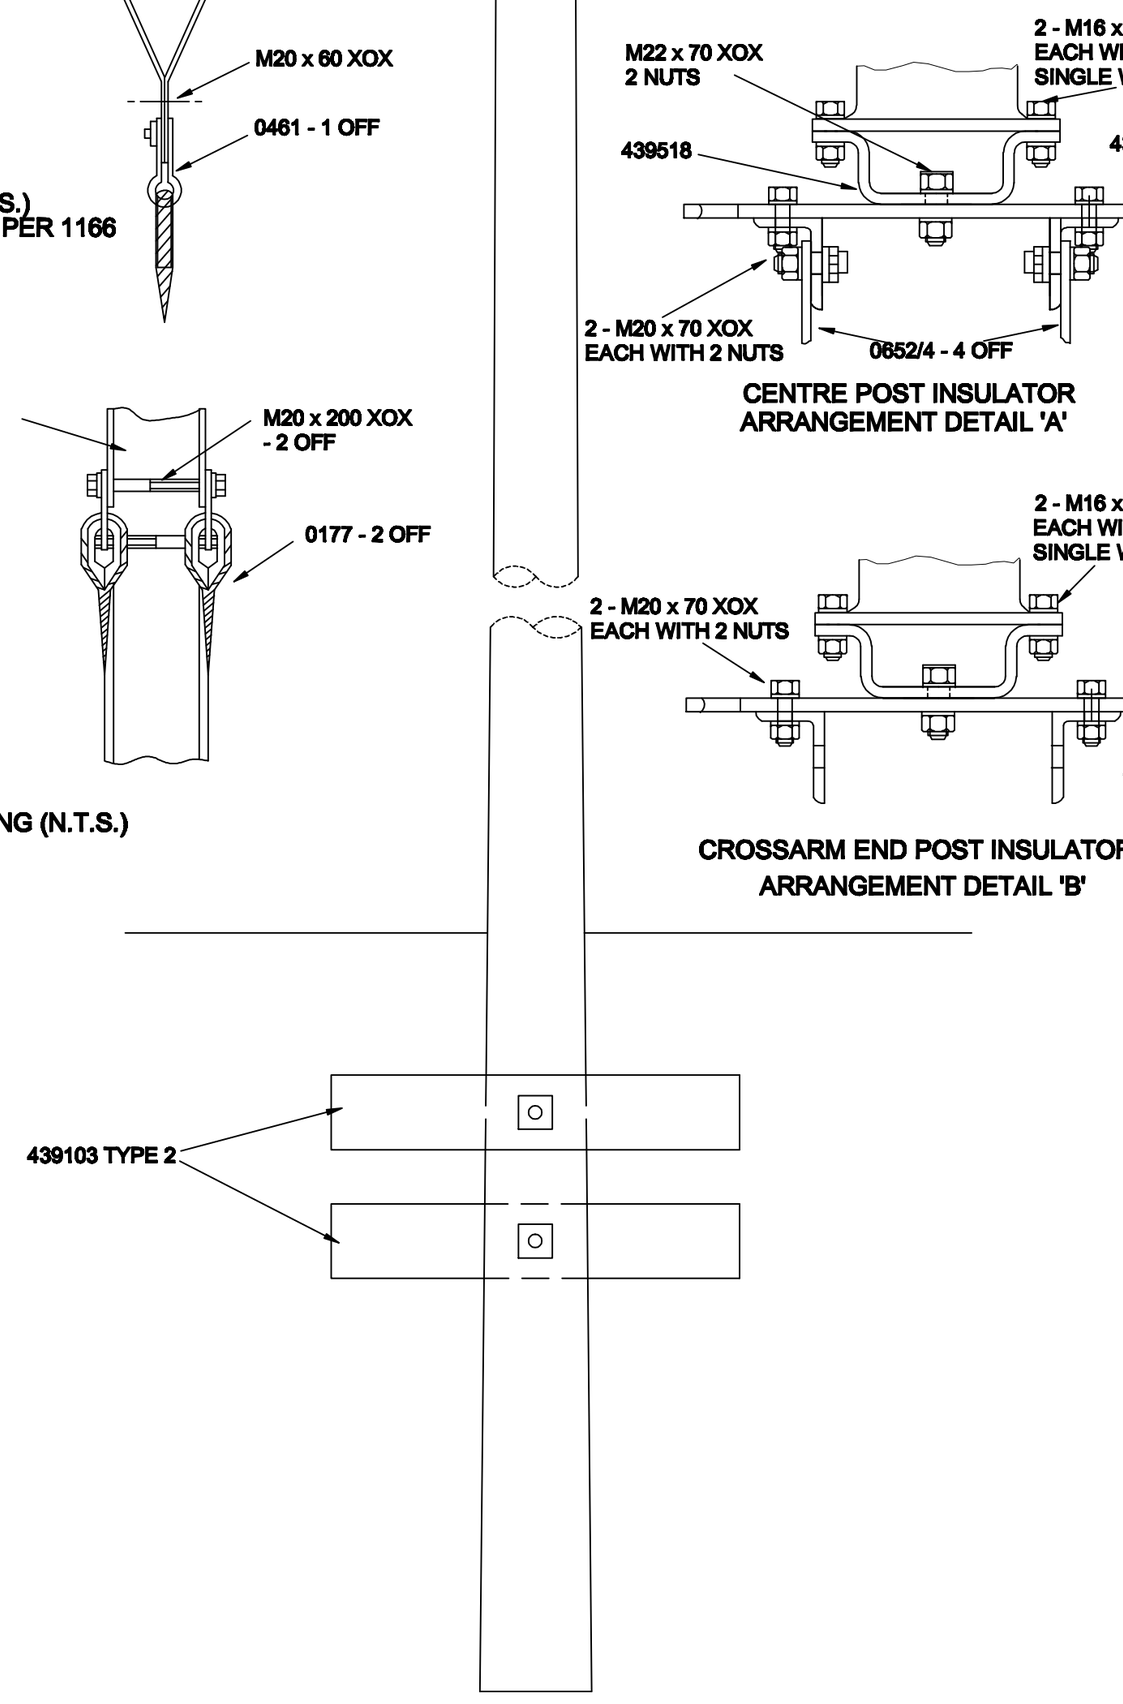

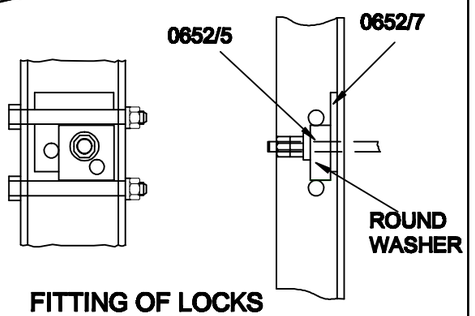

FITTING OF LOCKS
(SEE NOTE 7)

CENTRE POST INSULATOR
ARRANGEMENT DETAIL 'A'

CROSSARM END POST INSULATOR
ARRANGEMENT DETAIL 'B'

NOTES

1. TIE RODS TO BE 439608/2 FOR SINGLE STOUT POLES AND FOR SINGLE EXTRA STOUT.
2. DETAIL DRAWINGS PREFIXED 43 REFER TO ESI DRAWINGS, OTHER DETAIL DRAWINGS REFER TO 1.09.101 SERIES
3. ALL STEELWORK FIXING BOLTS TO BE COMPLETE WITH 1 ROUND WASHER UNDER NUT, 1 ROUND WASHER UNDER BOLT HEAD EXCEPT WHERE SPECIFIED OTHERWISE.
4. **WHERE IT IS NECESSARY TO PROVIDE EARTHED STEELWORK, THE REQUIRED COMPRESSION LUG TO BOLTED THROUGH 22mm DIA. HOLE IN VERTICAL CHANNEL COMPRESSION LUG TO BE** VPCL 1.4 (22)
5. CROSSARM PACKS AS FOLLOWS :-
 0652/5 ON CHANNEL FIXING IMMEDIATELY BEHIND CROSSARM
 0652/3 ON TIE STRAP AND CHANNEL FIXING
 A-IN FRONT OF CROSSARM AND 0652/6 RESPECTIVELY ON STOUT POLES
 B-BEHIND CROSSARM AND 0652/5 RESPECTIVELY ON EXTRA STOUT POLES
6. LOCKS TO BE ROTATED/FITTED TO ENSURE CONTACT BETWEEN OUTER FACE AND 0652 ITEM 5
7. LOCK 0652 ITEM 7 TO BE ROTATED/FITTED TO LOCK TIE ROD BETWEEN CHANNEL SIDES WHILST MAINTAINING CHANNEL PLUMB AND CENTRAL POLE FACE.
 LOCK 0652 ITEM 6 TO BE ROTATED/FITTED TO LOCK TIE ROD BETWEEN 2-M20 BOLTS WHILST PROVIDING LEVEL MOUNTING FOR POST ANGLES

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE STATED

POLE LENGTH	DIM. 'Y'
8.5m - 12.0m INCLUSIVE	2.0m
13.0m - 15.0m INCLUSIVE	2.2m
16.0m - 18.0m INCLUSIVE	2.4m
20.0m - 24.0m INCLUSIVE	3.0m

WORK SPEC. 04/242

CE Electric UK

Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF

Manufacturer Details

Sheet No. 1	Scale 1:20
Prepared By Joan.Oakley	
Revised 24/08/10	Grid Reference
Date Issued 10/08/10	Checked By G HAMMEL

66KV SINGLE CIRCUIT LINE
SINGLE POLE ARRANGEMENT, NORMAL SPAN
MEDIUM APPLICATION

Type OVERHEAD POLES

Ref No. C989971 Historic Drg.No. 1091231192

Revision Notes