



Scottish & Southern
Electricity Networks

SP-NET-OHL-007

Overhead Lines

Specification for Wood Poles, Blocks and Associated Components



SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

	Name	Title
Author	Abdallah Abdaelbaset	Overhead lines Policy Engineer
Checked by	Andrej Kujikis	Asset Standards and Investigations Manager
Approved by	Rodger Yuile	Head of Strategic Planning and Policy

Contents

1	Introduction	3
2	References	3
3	General.....	3
4	Sourcing and Selection of Raw Timber	3
5	Size Requirements	4
6	Fabrication	4
7	Preservative Treatment	5
8	Softwoods for Purposes other than Poles	5
9	Hardwoods for Purposes other than Poles.....	5
10	Trussing Tackle and Fasteners	6
11	Quality Requirements.	6
12	Bleeding Poles.....	7
13	Information Regarding Stock Numbered and Special Order-Items.....	7
14	Revision History	8
Appendix A	Stock Numbered Item Listing.....	9
Appendix B	Standard Pole Sizes	16
Appendix C	Drawing List and Description	18
Appendix D	Drawings.....	20

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

1 Introduction

This document covers the supply of specification of timber for poles, stay blocks, and other ancillary timbers and equipment for overhead line use.

2 References

The documents detailed in Table 2.1 - British Standards and ISO Standards, and Table 2.2 - ENA Standards below should be read in conjunction with this document.

Table 2.1 - British Standards and ISO Standards

Reference	Title
BS EN 14229:2010	Structural timber. Wood poles for overhead lines
BS 4978:2007	Visual strength grading of softwood. Specification
BS 6001-1: 2011	Sampling procedures for inspection by attributes. Sampling schemes indexed by acceptance quality limit (AQL) for lot-by-lot inspection

Table 2.2 - ENA Standards

Reference	Title
ENATS 43-88 Issue 7 2021	Selection and treatment of wood poles and associated timber for overhead lines
ENATS 43-96 Issue 2 1986	Fasteners and washers for wood pole overhead lines

Table 2.3 - SSEN Specifications

Reference	Title
SP-NET-OHL-003	Specification for fasteners bolts and washers for use in wood pole lines

3 General

- 3.1 All suppliers shall confirm compliance with the terms of this specification and ENA TS 43-88:2021.
- 3.2 Suppliers shall provide a self-certification and conformance declaration as per Annex H of ENA TS 43-88:2021.
- 3.3 Should a supplier identify a deviation from this specification or ENA TS 43-88 then this shall be highlighted at the tender stage and approved, or otherwise, by SSEN in the form of a caveat as part of the tender application

4 Sourcing and Selection of Raw Timber

- 4.1 Species for poles

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
			✓	
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

The preferred species of timber is Scots Pine. Other suitable species and grading requirements may be acceptable as agreed between SSEN and the supplier and as referred to in ENA TS 43-88 section 4.1.

4.2 Timbers for products other than for poles

Softwoods and hardwoods for use, other than as poles, are referred to in clause 8 of this Specification.

4.3 Growing conditions

The supplier shall provide details on their sourcing of raw material, the growing conditions, how these are maintained and monitored and how the quality of the raw material is guaranteed and maintained throughout the contract period.

5 Size Requirements

5.1 Sizes

The poles shall comply with the sizes given in ENA TS 43-88:2021 Annex A and Appendix 2 of this document, after dressing, and be of uniform taper.

5.2 Large pole heads

Where specified large pole heads are required in accordance with Appendix 2.

5.3 Large pole heads are an SSEN specific requirement and the dimensions are detailed in the table in Appendix 2.

6 Fabrication

6.1 Fabrication of poles will be as per ENA TS 43-88:2021 section 9 and in accordance with this specification. Fabrication drawings are detailed in the appendices annexed to this document.

6.2 Drilling

All holes shall be drilled to SSEN dimensions and the drawings referenced below in the appendices 3 and 4 below.

6.3 Scarfing

All scarfing shall be to SSEN dimensions and the drawings referenced below in the appendices 3 and 4 below.

6.4 Marking

All marking shall be completed by **gouging, branding, stamping, or routing**. The marking will follow ENA TS 43-88:2021 section 8 and annex D. Large pole heads will be indicated by a + (plus) next to the height stamped on the butt.

6.5 Sawing and Machining

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
			✓	
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

In the case of 'A' poles and strut poles, all slotting dimensions and details can be found in attached SSEN drawings in appendices 3 and 4 below.

7 Preservative Treatment

- 7.1 Treatment preservative accepted for wood poles is **Creosote** (Subject to UK Health and Safety Executive granting extension for use of Creosote) and the alternative **Copper Oil preservative** on the condition that it meets the requirements stipulated in clause 5.7.2 of BS EN 14229.
- 7.2 Alternative treatment methods can be submitted by the supplier. These will have to be assessed separately by SSEN.
- 7.3 With all treatment methods, the supplier shall demonstrate adherence to health, safety, and environment legislation applicable at the time of tender.

8 Softwoods for Purposes other than Poles

- 8.1 Stay and brace blocks shall comply with ENA TS 43-88:2021 section 13.
- 8.2 Stay and brace blocks may, be fabricated from French Maritime Pine (*Pinus pinaster*), *Pinus sylvestris/nigra* or if necessary, Douglas fir or as agreed with SSEN. Blocks shall be in accordance with Grade GS to BS 4978 with wane permitted on one face only but unrestricted on both edges, and as agreed by SSEN.
- 8.3 Drilled holes shall be positioned to avoid knots or shakes.
- 8.4 Guards and mounting boards

These components to be inspected, prior to purchase, to ensure that the timber is free of defects and suitable for the use they are designed for.

Species of Timber

Dutch Elm (*Ulmus hollandica*).

European Oak (*Quercus robur*) or other species as agreed with SSEN.

Fabrication

Copies of dimensioned component drawings must be provided by the pole supplier.

9 Hardwoods for Purposes other than Poles

Hardwoods shall comply with ENA TS 43-88:2021 section 14.

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
			✓	
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

10 Trussing Tackle and Fasteners

10.1 Trussing Tackle

- Trussing tackle will be supplied in accordance with the appropriate pole fabrication drawing (please check appendix 4 below). The completed assembly must be matched to the relevant 'H' pole before despatch.

10.2 Fasteners:

- Pole bolts and nuts shall be supplied in accordance with the current issue of ENA TS 43-96 and SSEN specification document SP-NET-OHL-003
- Washers shall be supplied in accordance with the current issue of ENA TS 43-96 and SSEN specification document SP-NET-OHL-003.
- Square flat washers to table 6 of 43-96, and square curved washers to drawing 439605 of 43-96:1986 to be supplied with every pole bolt and nut assembly

11 Quality Requirements.

11.1 Suppliers shall provide a self-certification conformance declaration as per ENA TS 43-88 Annex H.

11.2 Suppliers shall be able to demonstrate certification in both ISO9001 and ISO14001 or alternatively produce a detailed flowchart and procedure document(s) outlining how quality and environmental safety are managed within their premises.

11.3 In addition to providing the declaration as detailed in 11.1 above, supplier shall provide for inspection, if not covered in that declaration, documentation listed below:

- Checks and records on species of timber
- Felling records, including dates, country of origin and location of felling
- Date of arrival at suppliers works
- Stacking records, including monitoring of stacks for moisture content and records of when that moisture content exceeds 25%
- Records to show conformity to sizes specified
- Record conformity of fabrication to the various fabrication requirements
- Records confirming that the temperature of timber prior to treatment
- Details of creosote treatment cycle
- Details on checks and test borings after treatment

11.4 Suppliers shall provide certification for any instruments used, calibration records and any other details.

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

- 11.5 Suppliers will also need to demonstrate adequate training and experience of their workforce involved in manufacturing of wood poles and their accessories.
- 11.6 Sampling size for checking penetration of the preservative shall follow requirements stipulated in BS 6001-1 and sample sizes as detailed in table 11.1 below.

Table 11.1 - Batch Size, Sample Size Requirements for Preservative Penetration

Batch size	Sample size	Allowable failures
1-15	3	0
16-25	5	0
26-50	8	0
51-90	13	0
91-150	20	0
151-280	32	0
281-500	50	1
>501	80	1

12 Bleeding Poles

- 12.1 Bleeding poles must not be dispatched.
- 12.2 Poles that subsequently bleed before erection must be returned for re-treatment.
- 12.3 The re-treatment of bleeding poles shall be carried out on a charge compromising bleeding poles only.
- 12.4 Re-treated Poles shall be stored within supplier's premises for no less than 3 weeks prior to shipment to SSEN.

13 Information Regarding Stock Numbered and Special Order-Items

- 13.1 Appendix 1 details SSEN stock coded items together with their associated drawing reference. These drawings give the fabrication details and details of any blocks, bolts, nuts, washers, and trussing gear. This listing may be subject to variation following tender award.
- 13.2 Not all items are stock coded. Items which do not have stock numbers will be treated as a special order. The method of ordering will be subject of agreement between the supplier and the SSEN Procurement Department.
- 13.3 Appendix 3 provides a list of drawings for all types, including those that are not stock coded. Suppliers can provide their own drawing references if required.

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

13.4 Drawings are shown in appendix 4.

14 Revision History

No	Overview of Amendments	Previous Document	Revision	Authorisation
01	Document transferred to current SSEN template and nomenclature.	SP-PS-103	1.00	Rodger Yuile
02				

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Appendix A Stock Numbered Item Listing

This section covers items for which there is an SSEN Stock Number.

L: Light
M: Medium
S: Stout

DRAWING HO/37/4032

Description

BLX Narrow Construction HV Pole Scarfed on both sides and supplied with kicking block, pole bolt, nut, and washers.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Number
10	M	054151
10	S	060673
10.5	M	060674
10.5	S	060675
11	S	060676
11.5	M	054041
11.5	S	054054
12	M	054096
12	S	054067

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Number
13	M	054119
13	S	054070
14	S	054135
15	S	060677
16	S	060678
17	S	060679

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

DRAWING HO/37/4031

Description

BLX Narrow Construction HV Pole Scarfed on one side and supplied with kicking block, pole bolt, nut, and washers.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
10	M	054148
10.5	M	060680
11	M	060681
11.5	M	054009
11.5	S	054012
12	M	054083
12	S	054025
13	M	054106
13	S	054038
14	S	054122

DRAWING A1001

Description

11kV light construction pole, scarf one side.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
8.5	M	060682
9	M	056014
9	S	060683
9.5	M	056027
10	L	060684
10	M	056030
10.5	M	060607
11	L	060686
11	M	056043
11.5	S	060687
12	M	060689

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

DRAWING HO/37/1201

Description

LV ABC pole drilled with 1 hole for ABC or 2 wire service.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code		Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
7	L	053011		10.5	S	057633
8.5	L	053037		11	M	057646
9	L	053040		11.5	M	057565
9	M	057510		11.5	S	053273
9.5	L	053053		12	M	057578
9.5	M	060710		12	S	053286
9.5	S	057617				
10	L	060711				
10	M	057536				

DRAWING A3002

Description

LV pole no scarf and drilled for 4 bolt holes at 300mm centres.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code		Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
8	L	053066		10.5	M	054203
8.5	L	053079		10.5	S	054245
8.5	M	054164		11	M	054216
9	L	053082		11	S	054258
9	M	054177		11.5	M	054217
9.5	L	053095		11.5	S	054261
9.5	M	054180		12	M	054218
9.5	S	054229		12	S	054274
10	L	053105		13	M	054219
10	M	054193				
10	S	054232				

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

DRAWING HO/37/2001

Description

HV pole single scarf supplied complete with kicking block and pole bolts, nuts, and washers.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
10	S	056056
11	S	056069
12	S	056072
13	S	056085
14	S	056098
15	S	060712
16	S	060713
17	S	060714

DRAWING HO/37/2010

Description

"H" pole, supplied as a complete item, two matching poles with double scarfed, with trussing tackle, brace block, pole bolts, nuts, and washers.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
10.5	S	056108
11	S	056111
11.5	S	060715
12	S	060716
13	S	060717
14	S	060718
15	S	060719
16	S	060720

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

DRAWING 501/1109/0205

Description

43-40 single HV pole.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code		Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
8.5	L	060362		11	L	060379
8.5	M	060380		11	M	060385
8.5	S	060237		11	S	060242
9	L	060376		11.5	S	060627
9	M	060381		12	M	060287
9	S	060238		12	S	060243
9.5	L	060377		13	M	060219
9.5	M	060382		13	S	060245
9.5	S	060239		14	M	060322
10	L	060378		14	S	060246
10	M	060383		15	S	060260
10	S	060240				
10.5	M	060384				
10.5	S	060241				

DRAWING 501/1109/0206

Description

43-40 "H" Pole supplied as a complete item two matching poles, with brace block and pole blocks, nuts & washers.

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
9	M	060669
9	S	060672
9.5	M	060685
9.5	S	060698
10	S	060708

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Pole Height (m)	Pole Grade (L/M/S)	SSEN Stock Code
10.5	S	060630
11	S	060643
12	S	060656
13	S	060721
14	S	060722
15	S	060723
16	S	060724

Accessories

Drawing Reference and description as detailed.

Accessories: Drawing Reference and description as detailed.

SSEN Drawing No	SSEN Stock Code	Description
	191186	Cable Covers
	191187	Bog Shoes
HO/38/317	174112	1.3 m stay/kicking block
HO/38/331	174264	1.75 m Stay Block
HO/38/516	191173	2.5 m Kicking Block for twin poles
HO/38/513	191144	Brace Block for "H" poles at 1.83 m centres
HO/38/514	191157	Brace Block for "H" poles at 2.1 m centres
HO/38/515	191160	Brace Block for "H" poles at 2.5 m centres
	191161	3.0 m Brace Block for COP 7 "H" poles

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

SSEN Drawing No	SSEN Stock Code	Description
	191162	3.4 m Brace Block for COP 7 "H" poles
	191163	3.5 m Brace Block for COP 7 "H" poles
HO/38/508	191092	12mm Pole plugs pk 50
HO/38/509	191102	20mm Pole plugs pk 50
	191103	22mm Pole plugs pk 50
HO/38/510	191115	24mm Pole plugs pk 50

H POLE TRUSSING TACKLE STEELWORK

Drawing Reference HO/39/172

Description as detailed below:

SSEN Stock Code	Description
"H" Pole Trussing Tackle Single Sets	
191199	H Pole bracing 1.830m centre x 2.440 m long
191209	H Pole bracing 2.130m centre x 2.440 m long
191212	H Pole bracing 2.440m centre x 2.440 m long
191225	H Pole bracing 2.500m centre x 2.440 m long
"H" Pole Trussing Tackle Double Sets	
191241	H Pole bracing 1.830m centre x 2.440 m long
191254	H Pole bracing 2.130m centre x 2.440 m long
191267	H Pole bracing 2.440m centre x 2.440 m long
191270	H Pole bracing 2.500m centre x 2.440 m long

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Appendix B Standard Pole Sizes

Pole sizes generally to ENA TS 43-88, except where specified. **Note large head poles are an SSEN specific requirement.**

Pole Height m	Normal head pole Diameter at top [mm]	Large head pole Diameter at top [mm]	Diameter at 1.5m from butt [mm]
Light Poles			
6	125		150
7	125		160
8	125		170
8.5	125		180
9	125		180
9.5	125		185
10	125		185
10.5	125		190
11	125		195
11.5	125		200
12	125		200
13	130		210
Medium Poles			
7	140	170	200
8	145	180	210
8.5	150	180	215
9	150	180	220
9.5	150	180	225
10	150	185	230
10.5	150	190	235
11	150	190	240
11.5	150	190	245
12	150	190	250
13	160	200	260
14	160	205	275
15	165	210	290
16	170	215	305

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Pole Height m	Normal head pole Diameter at top [mm]	Large head pole Diameter at top [mm]	Diameter at 1.5m from butt [mm]
17	180	220	320
18	180	220	330
20	180	230	360
22	190	240	380
Stout Poles			
8.5	190	240	265
9	190	240	275
9.5	190	245	280
10	190	245	285
10.5	190	250	290
11	190	250	295
11.5	190	250	300
12	190	250	305
13	195	255	320
14	195	255	335
15	195	260	350
16	200	265	365
17	200	265	375
18	200	265	390
20	200	265	415
22	200	265	435
24	200	265	470

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Appendix C Drawing List and Description

This section details the drawing number and associated description. Where an alternative drawing number is shown this can also be used as the fabrication drawing.


Fabrication Drawing			Alternative Drawing	
Drawing Number	Issue/Date	Description	Drawing Number	Issue/Date
A1000	2/May 88	Single Pole with Double Crossarm		
A1009	3/May 88	Single Vertical Pole		
HO/37/1019	2/Jul 93	Single Pole (Undrilled) with block		
A1020	3/May 88	H pole 1830 centres		
A1029	1/Sept 86	H pole 1830 centres (undrilled)		
HO/37/2009 sheet 3	1/Mar 93	33kV Single Circuit Vertical Pole		
HO/37/2021 sheet 3	1/Feb 97	33kV H Terminal Pole (Polymeric cable)		
HO/37/2910	1/Mar 93	Single Circuit Intermediate Twin Pole Heavy Construction		
A3003-2	1/Sep 86	LV Strut Pole		
HO/37/4000	2/Apr 93	Single Pole Scarfed one side		
HO/37/4001	2/Apr 93	Single Pole Scarfed both sides		
HO/37/4010	1/Mar 93	11kV S.C. H Pole Intermediate 1830 centres		
HO/37/4014	1/Mar 93	11kV S.C. H Pole Section 1830 centres		
HO/37/6002 sheet 3	1/Mar 93	33kV Double Circuit Intermediate H pole 1800 spacing		
HO/37/6004 sheet 3	1/Oct 92	33kV Double Circuit Section H pole 1800 spacing		
HO/37/6005 sheet 5	1/Mar 93	33kV Double Circuit H terminal pole		
HO/37/4032	21/Apr 1998	Single Pole Scarfed both sides 11kV narrow construction		
HO/37/4031	31/Jul 1995	Single Pole Scarfed one side 11kV narrow construction		
A1001	3/May 88	Single Pole with Single Crossarm		

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Fabrication Drawing			Alternative Drawing	
Drawing Number	Issue/Date	Description	Drawing Number	Issue/Date
HO/37/1201	5/Apr 93	2 wire L.V. Distribution and Service Poles		
A3002	2/Sep 86	4 wire L.V. Distribution Pole		
HO/37/2001	1/Mar 93	Pole Drilling Single Pole	HO/37/4000	1/Apr 93
HO/37/2010	1/Mar 93	33kV H pole 1830 centres	HO/37/4014	1/Mar 93
501/1109/0205	1/Sep 91	COP 7 Single Pole Drilling, Scarfing and Marking		
501/1109/0206	1/Sep 91	COP 7 'H' Pole Member, Drilling, Scarfing and Marking		
HO/38/317	4/May 92	Wooden Stay/Kicking/Compression block 1300mm		
HO/38/331	2/Dec1994	Wooden Kicking Block 1750mm		
HO/38/516	2/Oct 1992	Wood Kicking Block for Twin Poles		
HO/38/513	2/Oct 1992	Wood Brace Block for 'H' Poles 1830mm centres		
HO/38/514	1/Sep 1986	Wood Brace Block for " pole 2130mm centres		
HO/38/515	1/Sep 1986	Wood Brace Block for " pole 2500mm centres		
HO/38/508	3/Jun 1993	Creosoted Pole Plug		
HO/38/509	2/ Jun 1993	Creosoted Pole Plug		
HO/38/510	2/ Jun 1993	Creosoted Pole Plug		
191186	2/ Feb 2004	Cable Backboard for 33kV Terminal Poles		

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
			✓	
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	


Appendix D Drawings

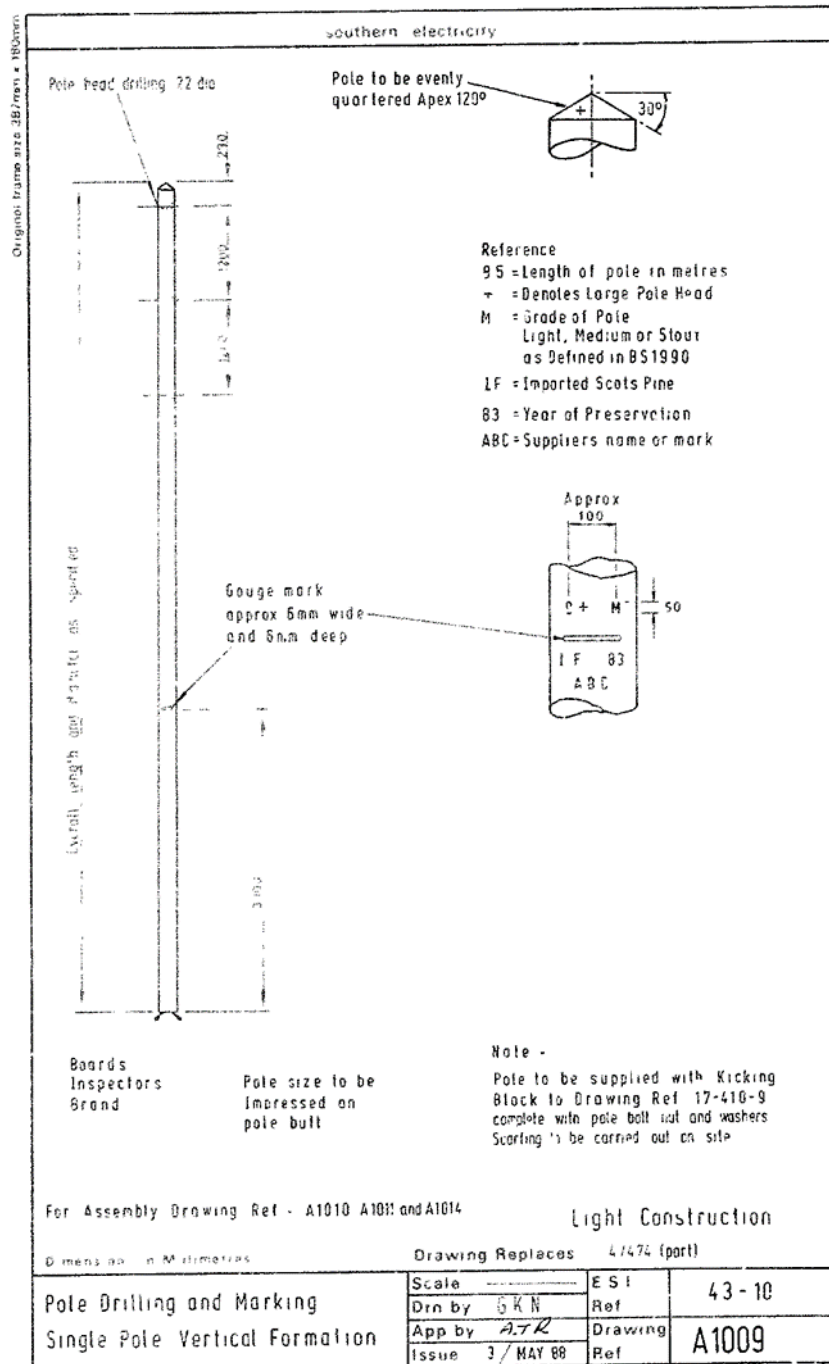


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

POLE MARKING AND ROOFING TO DRAWING No. HO/39/4407 * KICKING BLOCK:- EACH POLE IS TO BE SUPPLIED WITH, SCARFING, 22mm DIAMETER BOLT HOLE, BLOCK TO DRG No HO/38/331 AND COMPLETE WITH POLE BOLT, NUTS AND WASHERS. GOUGE MARK APPROX 6mm WIDE AND 6mm DEEP. * SCARFING CUT TO GIVE 100mm FACE * DRILLING 22mm DIAMETER OVERALL LENGTH AND DIA AS SPECIFIED 3000 255 INSPECTOR'S STAMP POLE SIZE TO BE IMPRESSED ON POLE BUTT.		Original Issue Date:- SEPT 86 ISSUE 2 REDRAWN ON CAD AMENDED TO MUP A.J.S. / W.C.S. 21.JUL.1993																
		<table border="1"> <thead> <tr> <th>POLE LENGTH (m)</th> <th>PLANTING DEPTH (m)</th> <th>DIMENSION 'A'</th> </tr> </thead> <tbody> <tr> <td>8.5 TO 10.5</td> <td>1.8</td> <td>1300</td> </tr> <tr> <td>11 TO 14</td> <td>1.8</td> <td>1300</td> </tr> <tr> <td>OVER 14</td> <td>2.1</td> <td>1600</td> </tr> </tbody> </table>		POLE LENGTH (m)	PLANTING DEPTH (m)	DIMENSION 'A'	8.5 TO 10.5	1.8	1300	11 TO 14	1.8	1300	OVER 14	2.1	1600			
POLE LENGTH (m)	PLANTING DEPTH (m)	DIMENSION 'A'																
8.5 TO 10.5	1.8	1300																
11 TO 14	1.8	1300																
OVER 14	2.1	1600																
APPLICATION:- HO/37/8932, HO/37/8933 SCHEDULE A1019 LIGHT CONSTRUCTION SUPERSEDES DRG REF:- A1019																		
This drawing is protected by copyright and the information contained therein is confidential. The drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRIC plc © 1987 2		SOUTHERN ELECTRIC																
SINGLE POLE (UNDRILLED) WITH BLOCK		<table border="1"> <tr> <td>Scale:-</td> <td>N.T.S.</td> <td>Dimensions in millimetres</td> </tr> <tr> <td>Des. by:-</td> <td>D.K.W.</td> <td>Drawing no.</td> </tr> <tr> <td>Iss. by:-</td> <td>A.J.S.</td> <td>HO /37 /1019</td> </tr> <tr> <td>Chk. by:-</td> <td>W.C.S.</td> <td>C.A.D. Reference. HO1019.37</td> </tr> <tr> <td>App. by:-</td> <td>W.C.S.</td> <td></td> </tr> </table>		Scale:-	N.T.S.	Dimensions in millimetres	Des. by:-	D.K.W.	Drawing no.	Iss. by:-	A.J.S.	HO /37 /1019	Chk. by:-	W.C.S.	C.A.D. Reference. HO1019.37	App. by:-	W.C.S.	
Scale:-	N.T.S.	Dimensions in millimetres																
Des. by:-	D.K.W.	Drawing no.																
Iss. by:-	A.J.S.	HO /37 /1019																
Chk. by:-	W.C.S.	C.A.D. Reference. HO1019.37																
App. by:-	W.C.S.																	
AAP		DATE PLOTTED \$\$\$\$date\$\$\$																


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

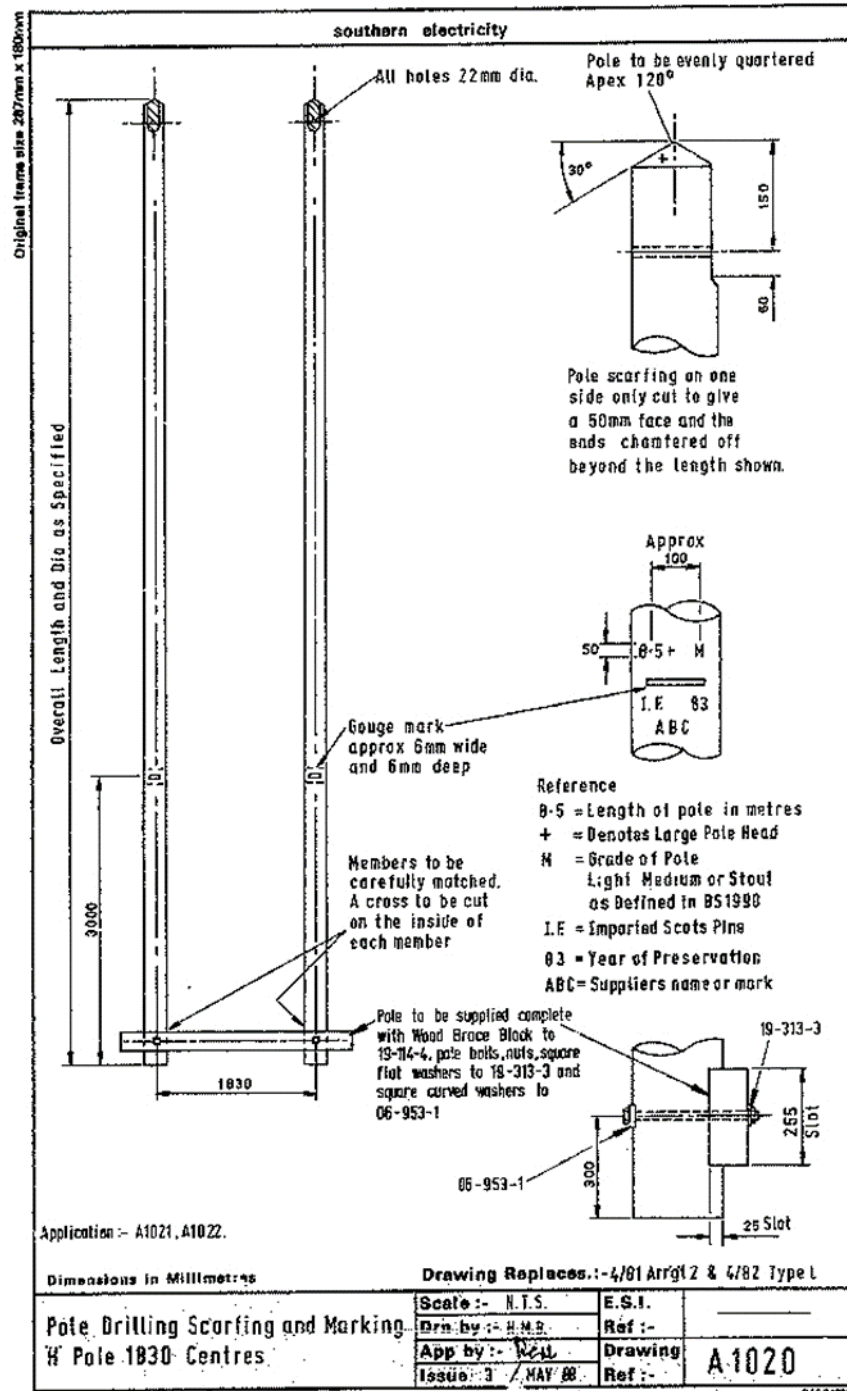


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

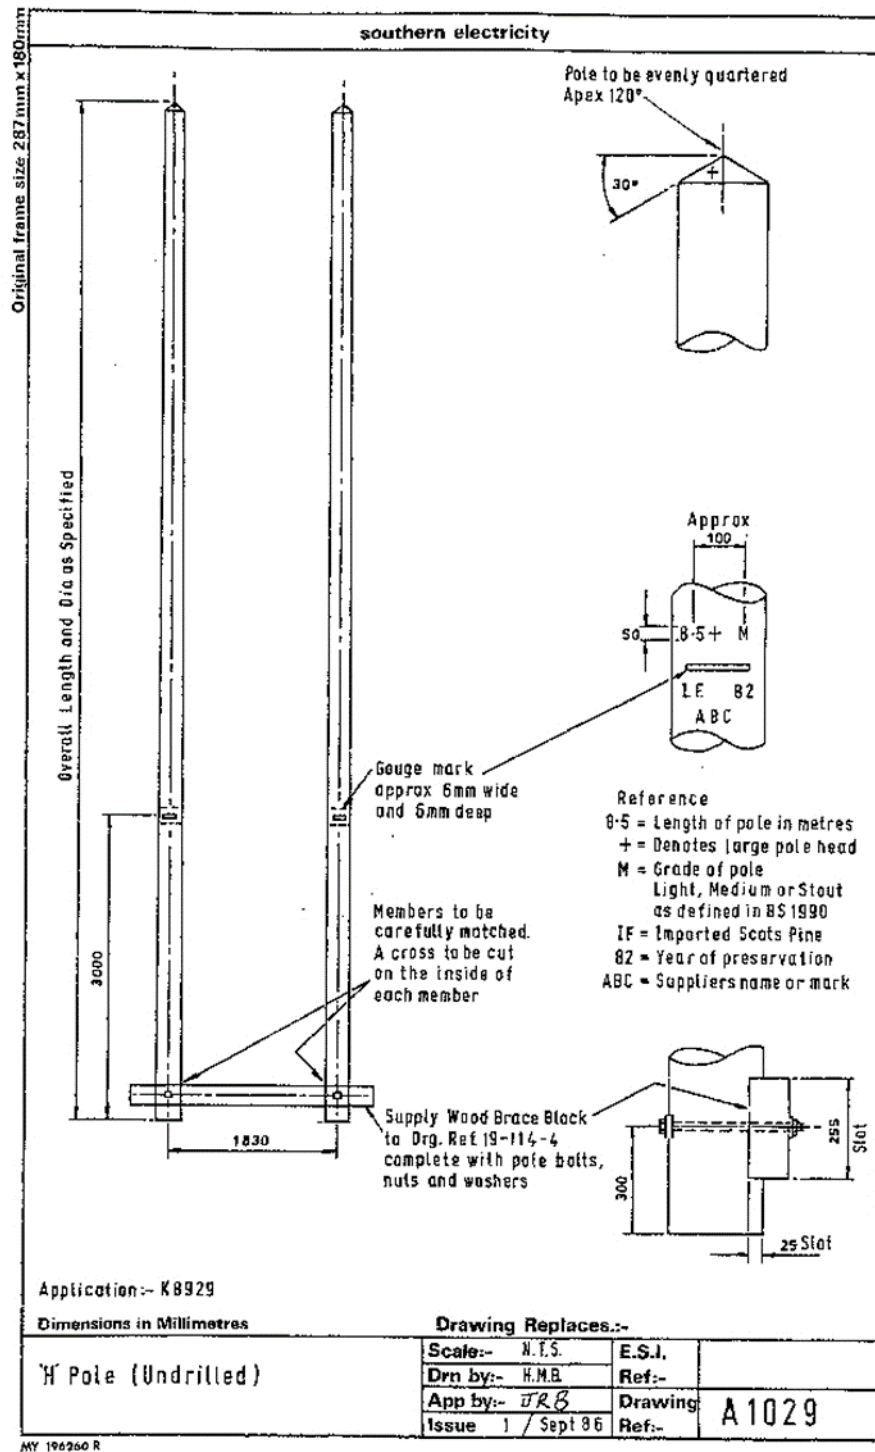


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components	Applies to	
		Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029

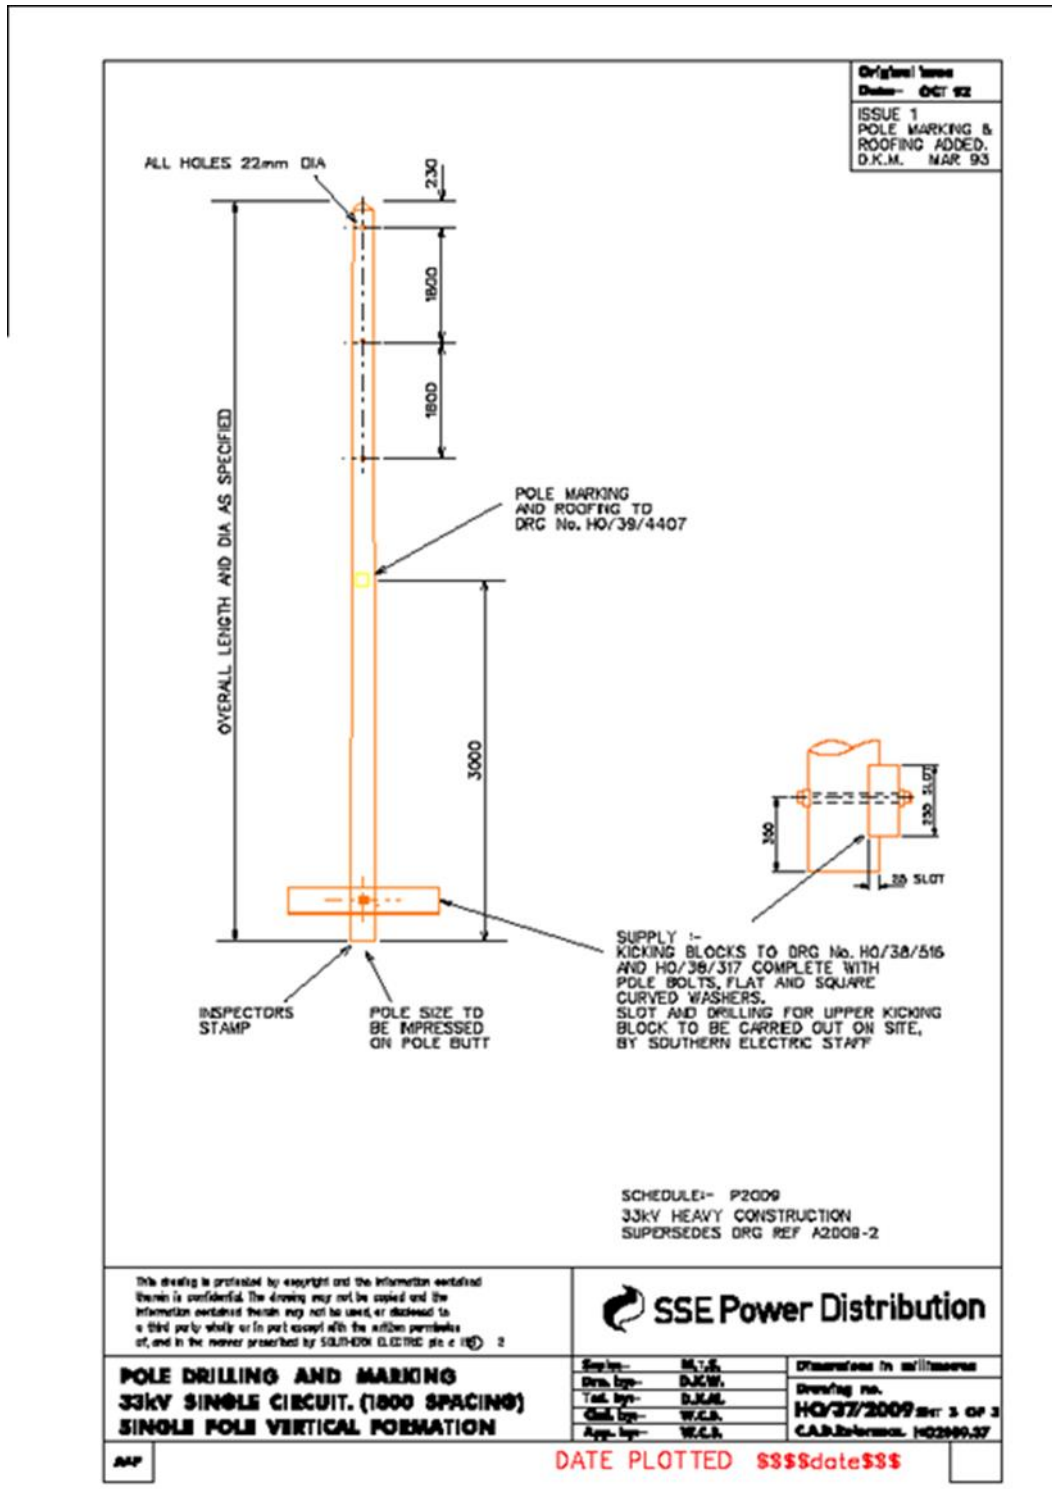


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

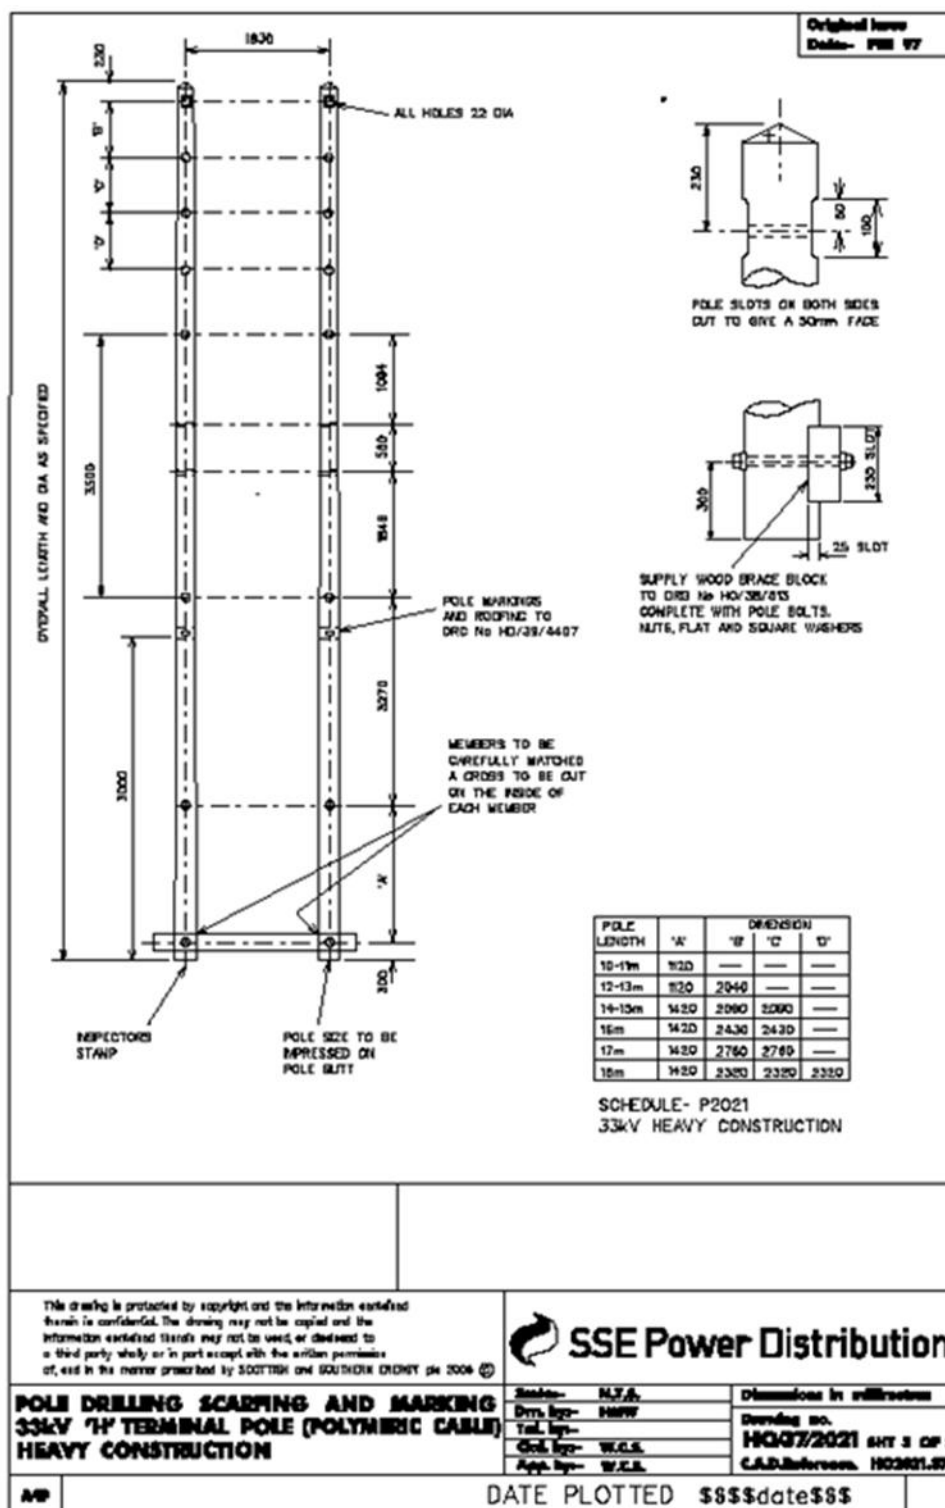


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

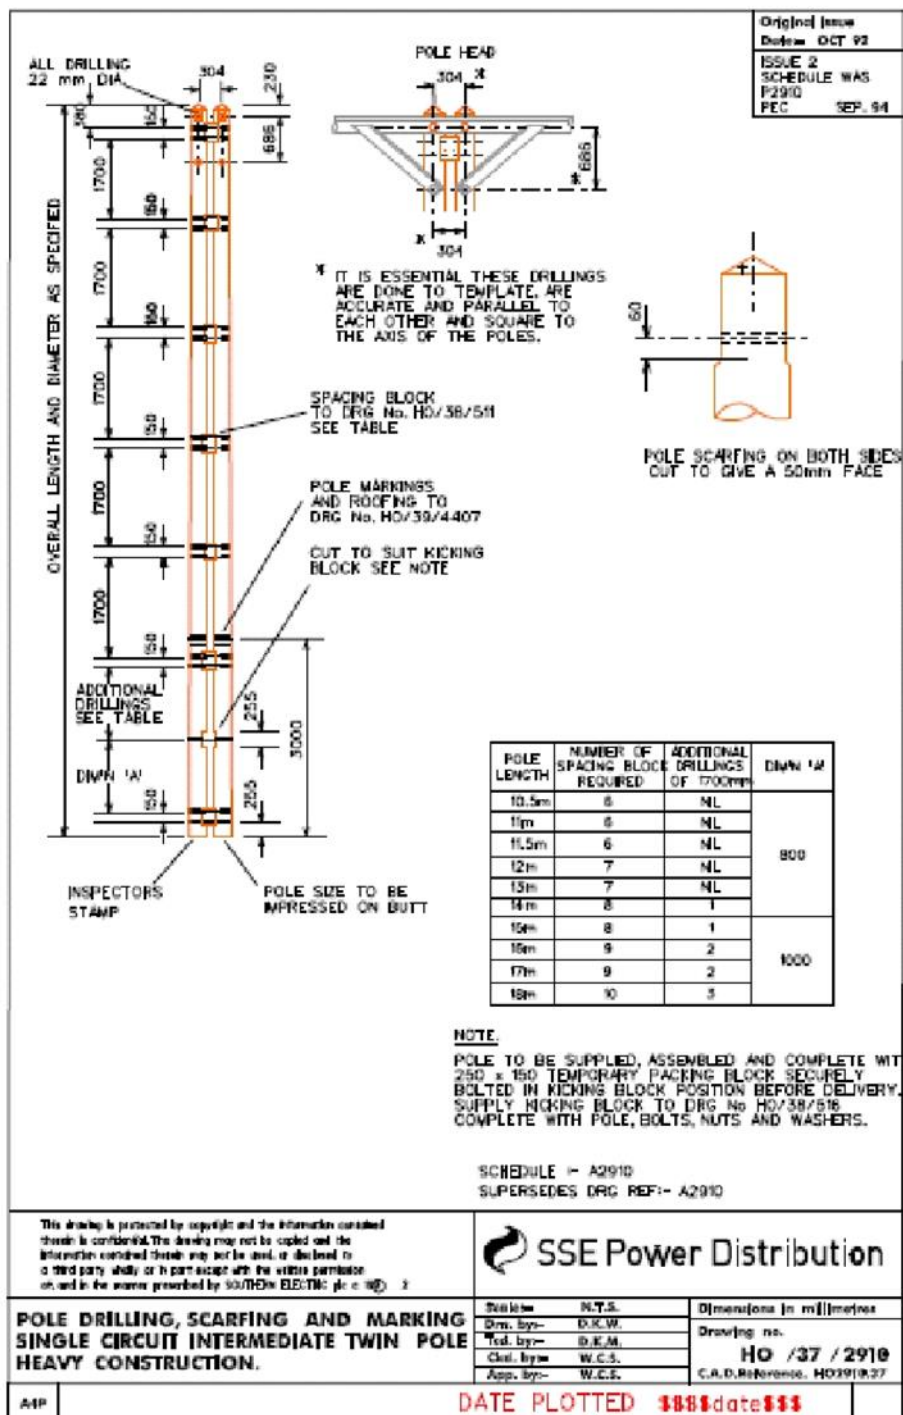


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

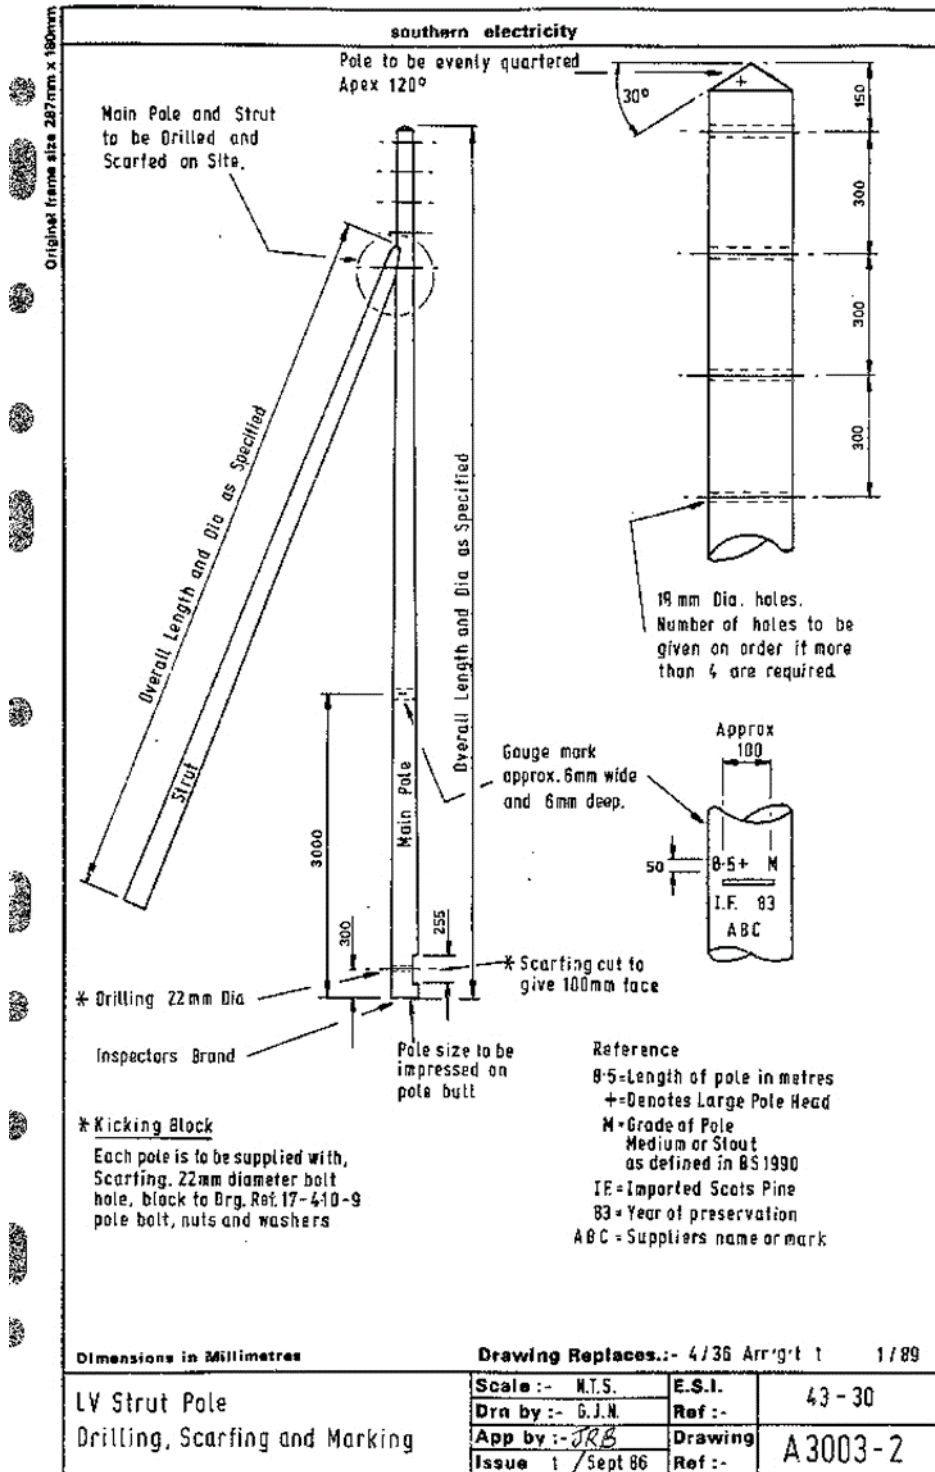


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

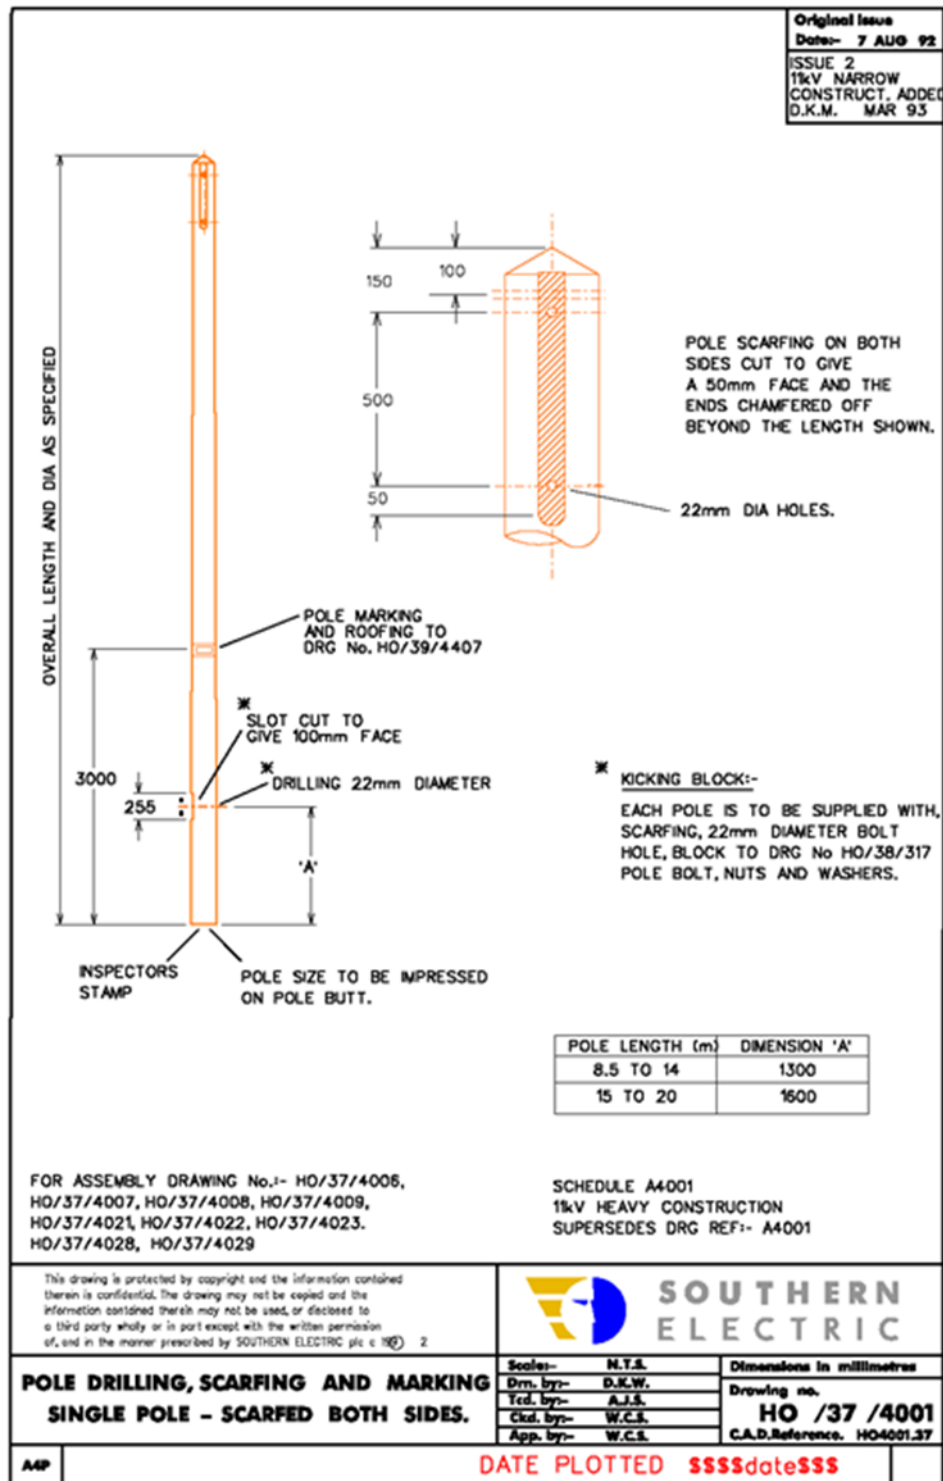


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

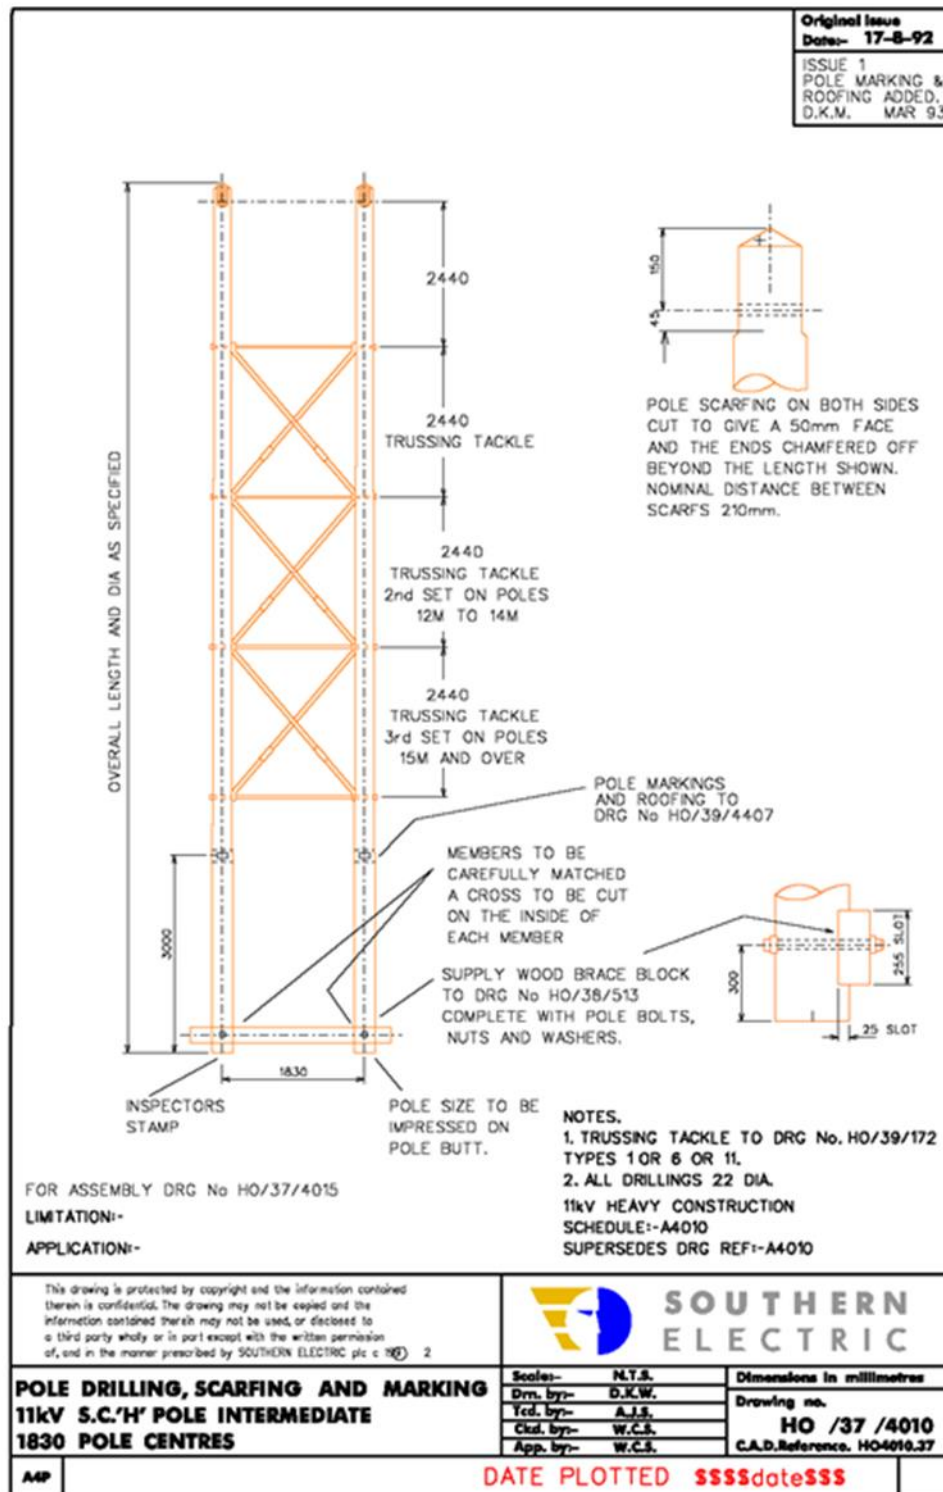


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components	Applies to	
		Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029

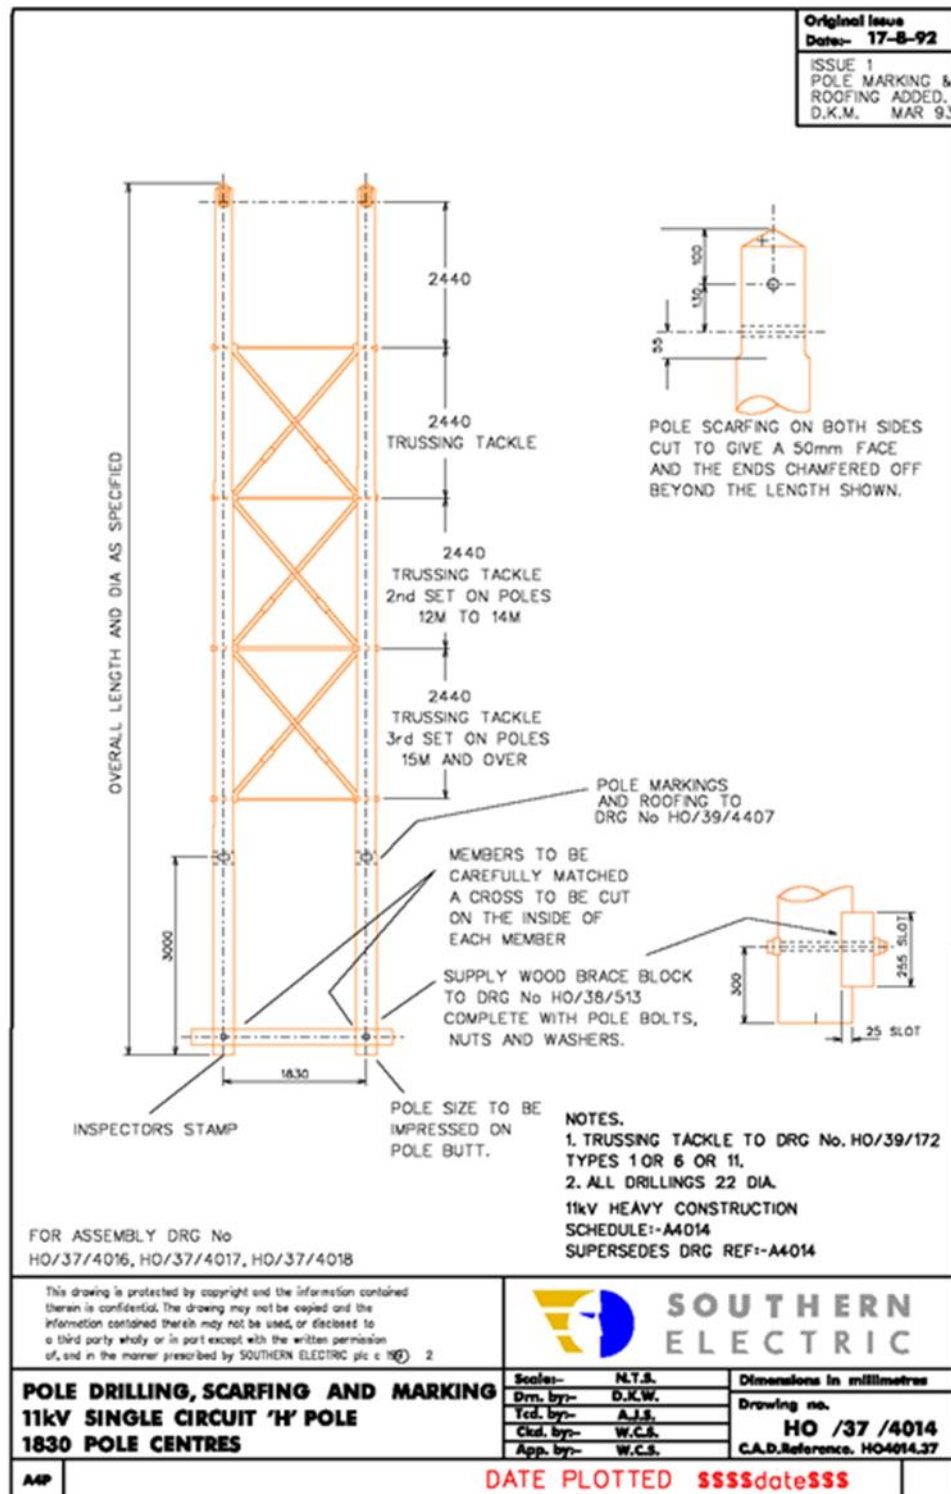


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components	Applies to	
		Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029

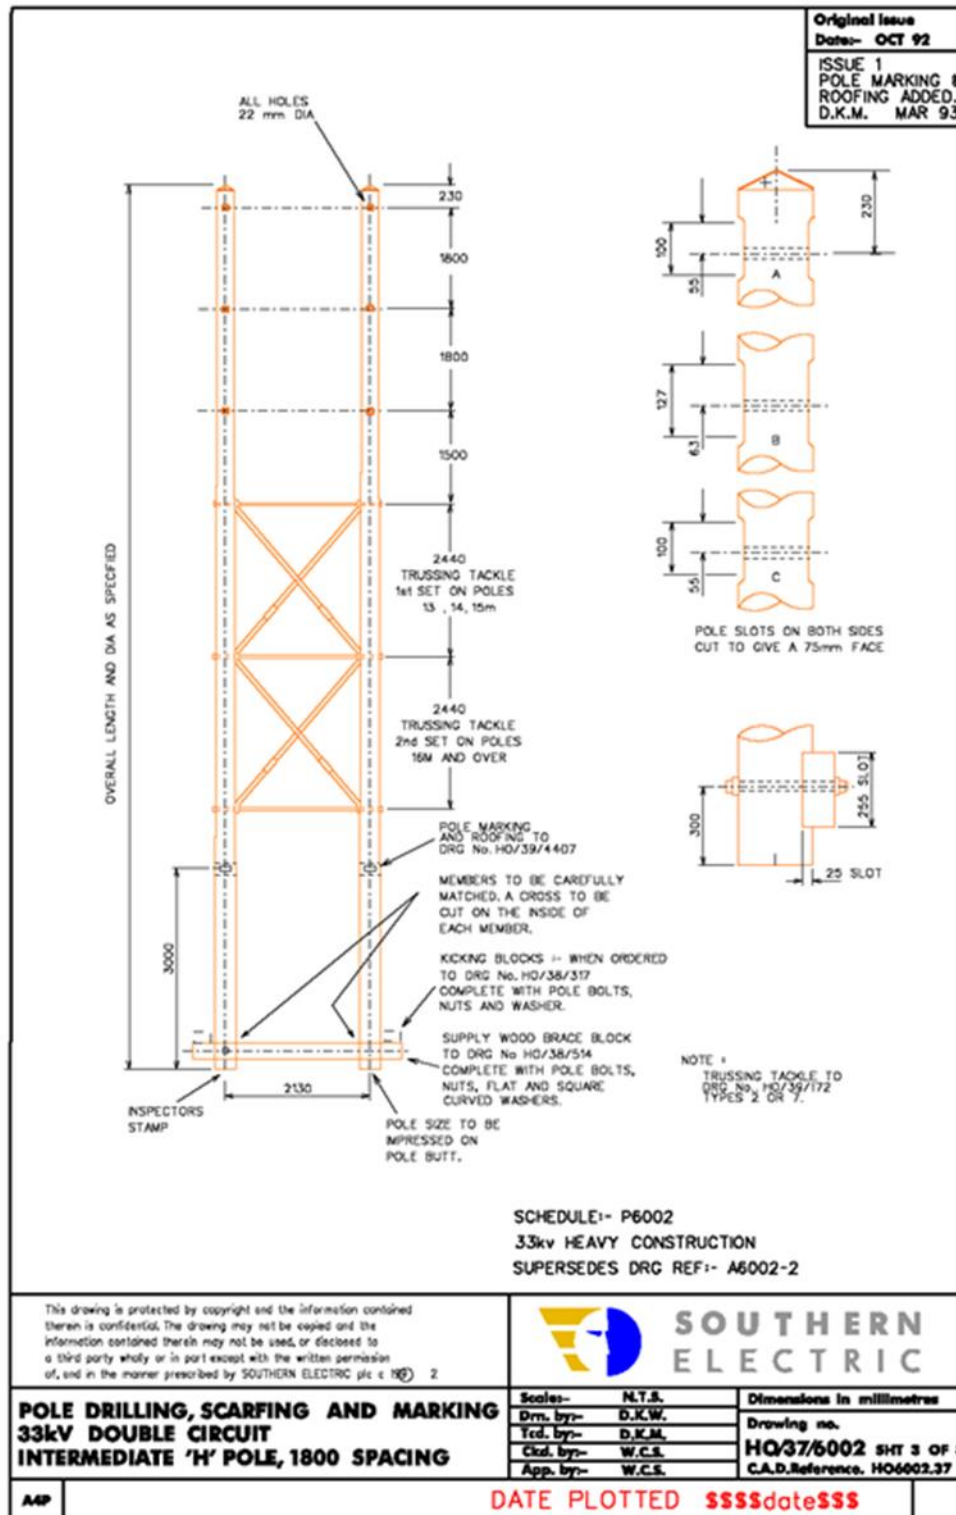

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components	Applies to	
		Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029

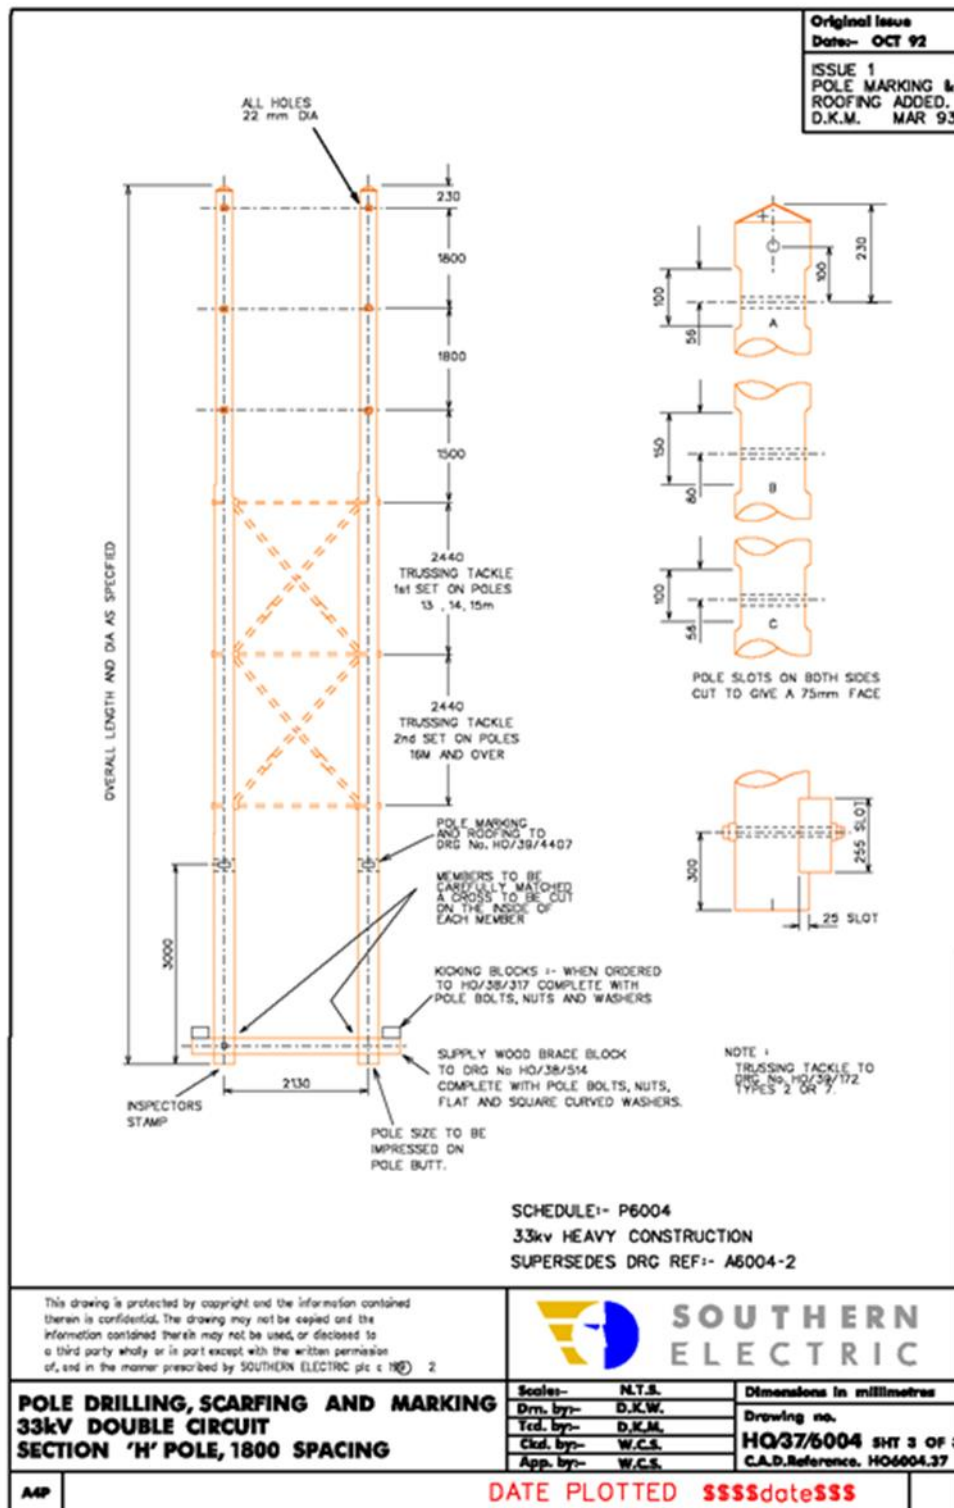


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

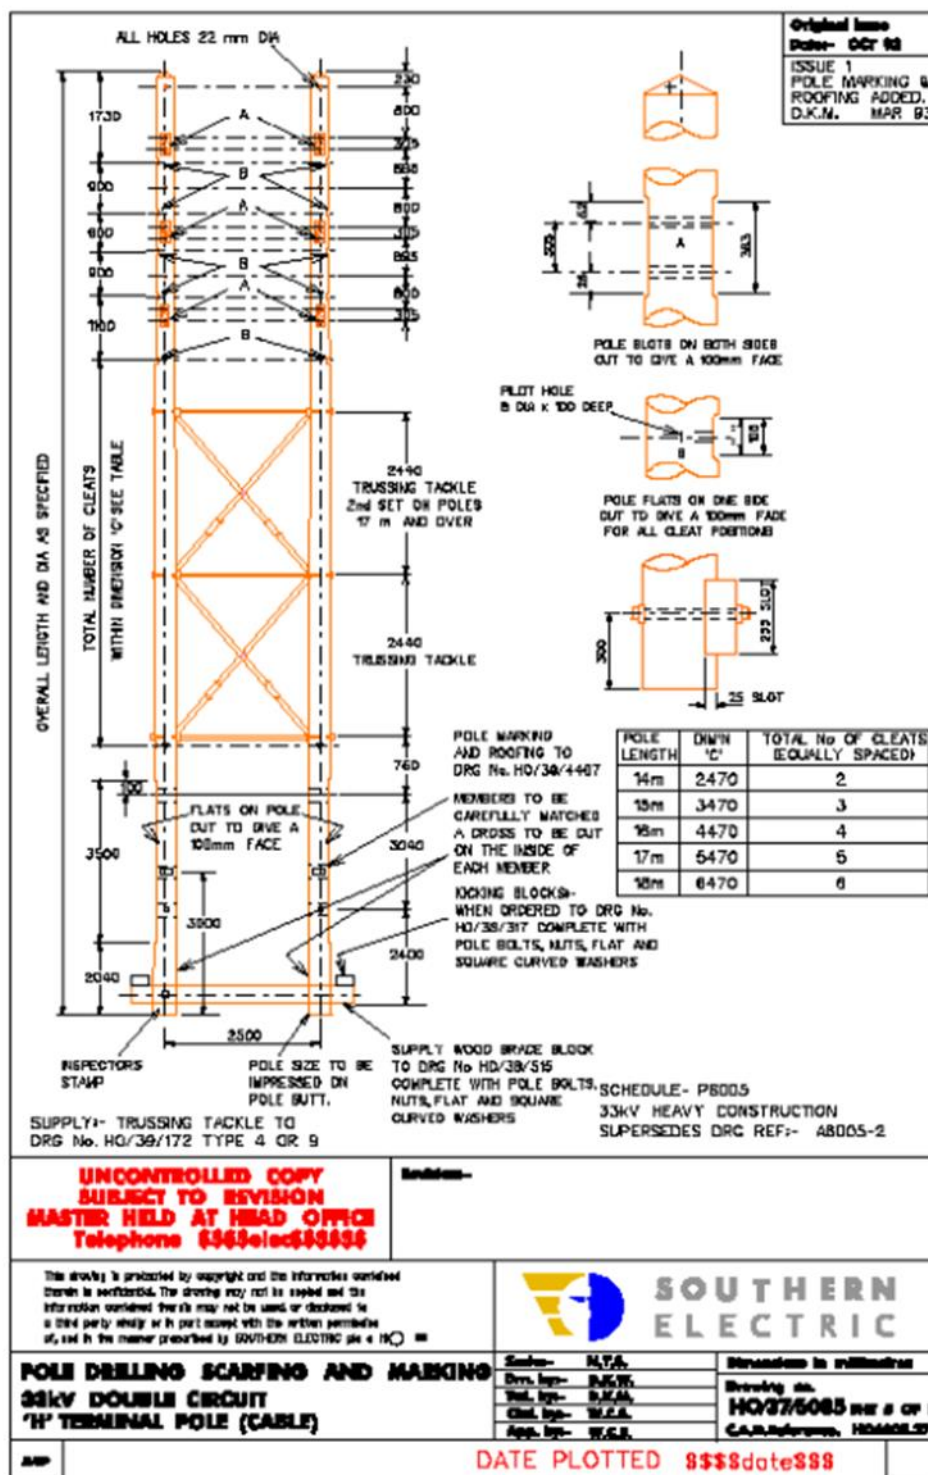

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

		Original Issue Date:- 22 MAR 1995 Issue 1 PAINTED NUMERALS ON BUTT PEC / WCS 31 JUL 1995												
OVERALL LENGTH AND DIA AS SPECIFIED 3000 255 150 320 50 POLE SCARFING ON ONE SIDE ONLY AND CUT TO GIVE A 50mm FACE AND THE ENDS CHAMFERED OFF BEYOND THE LENGTH SHOWN. 22mm DIA HOLES. POLE MARKING AND ROOFING TO DRAWING No. HQ/39/4407 SLOT CUT TO GIVE 100mm FACE DRILLING 22mm DIAMETER INSPECTOR'S STAMP POLE SIZE TO BE IMPRESSED ON POLE BUTT AND NUMERALS 31 PAINTED ON BUTT		KICKING BLOCK EACH POLE TO BE SUPPLIED WITH, SCARFING, 22mm DIAMETER BOLT HOLE, BLOCK TO DRG No HQ/35/17 POLE BOLT, NUTS AND WASHERS <table border="1"> <thead> <tr> <th>POLE LENGTH (m)</th> <th>DIMENSION 'A'</th> </tr> </thead> <tbody> <tr> <td>8.5 TO 14</td> <td>1300</td> </tr> <tr> <td>15 TO 20</td> <td>1600</td> </tr> </tbody> </table>	POLE LENGTH (m)	DIMENSION 'A'	8.5 TO 14	1300	15 TO 20	1600						
POLE LENGTH (m)	DIMENSION 'A'													
8.5 TO 14	1300													
15 TO 20	1600													
FOR ASSEMBLY DRAWING No.: HQ/37/4019, HQ/37/4020.		SCHEDULE A:4031 11KV NARROW CONSTRUCTION												
UNCONTROLLED COPY SUBJECT TO REVISION														
This drawing is protected by copyright and the information contained therein is confidential. The drawing may not be copied or the information contained therein may not be used, or disclosed to third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRICITY plc © 1995		SSE Power Distribution												
POLE DRILLING, SCARFING AND MARKING SINGLE POLE - SCARFED ONE SIDE. 11KV NARROW CONSTRUCTION		<table border="1"> <tr> <td>Scale:-</td> <td>N.T.S.</td> <td>Dimensions in millimetres</td> </tr> <tr> <td>Des. by:-</td> <td>PEC</td> <td>Drawing no.</td> </tr> <tr> <td>Iss. by:-</td> <td>WCS</td> <td>HO / 37 / 4031</td> </tr> <tr> <td>App. by:-</td> <td>WCS</td> <td>C.A.D Reference: HQ4031.37</td> </tr> </table>	Scale:-	N.T.S.	Dimensions in millimetres	Des. by:-	PEC	Drawing no.	Iss. by:-	WCS	HO / 37 / 4031	App. by:-	WCS	C.A.D Reference: HQ4031.37
Scale:-	N.T.S.	Dimensions in millimetres												
Des. by:-	PEC	Drawing no.												
Iss. by:-	WCS	HO / 37 / 4031												
App. by:-	WCS	C.A.D Reference: HQ4031.37												
A4P														


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components	Applies to	
		Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029

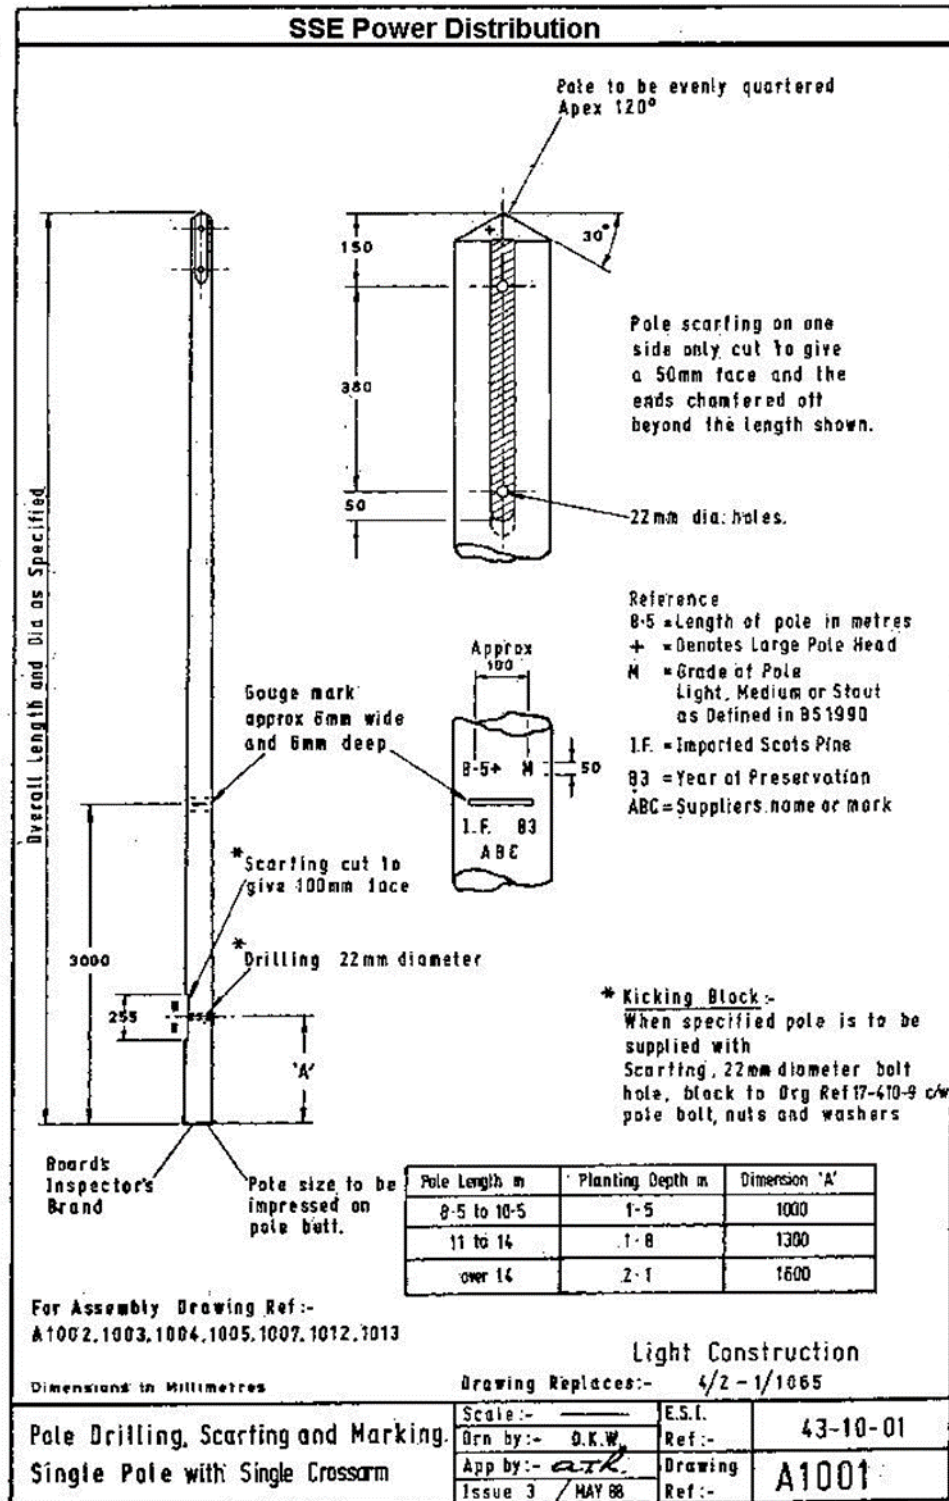


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

		Original issue:- 1 Date:- NOV-88 Issue 5 Apr 93 H0/39/4407 WAS H0/39/4406 PEC G. Chevrons.	
		Application:- Aerial Bundled Conductors L.V. Distribution and Service Poles.	
Sch. A1201		Drawing replaces: A3001. A3002.	
Drawing no. H0/37/1201 A4			This drawing is protected by copyright and the information contained therein is confidential. The drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRIC plc © 1991
	DRILLING AND MARKING L.V. DISTRIBUTION AND SERVICE POLES		Scale:- N.T.S. Drn. by:- D.K.W. Tcd. by:- H.M.W. App. by:- G. Chevrons
		Dimensions in millimetres Drawing no. H0/37/1201 4326-690 OXALUD (UK) LTD.	


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

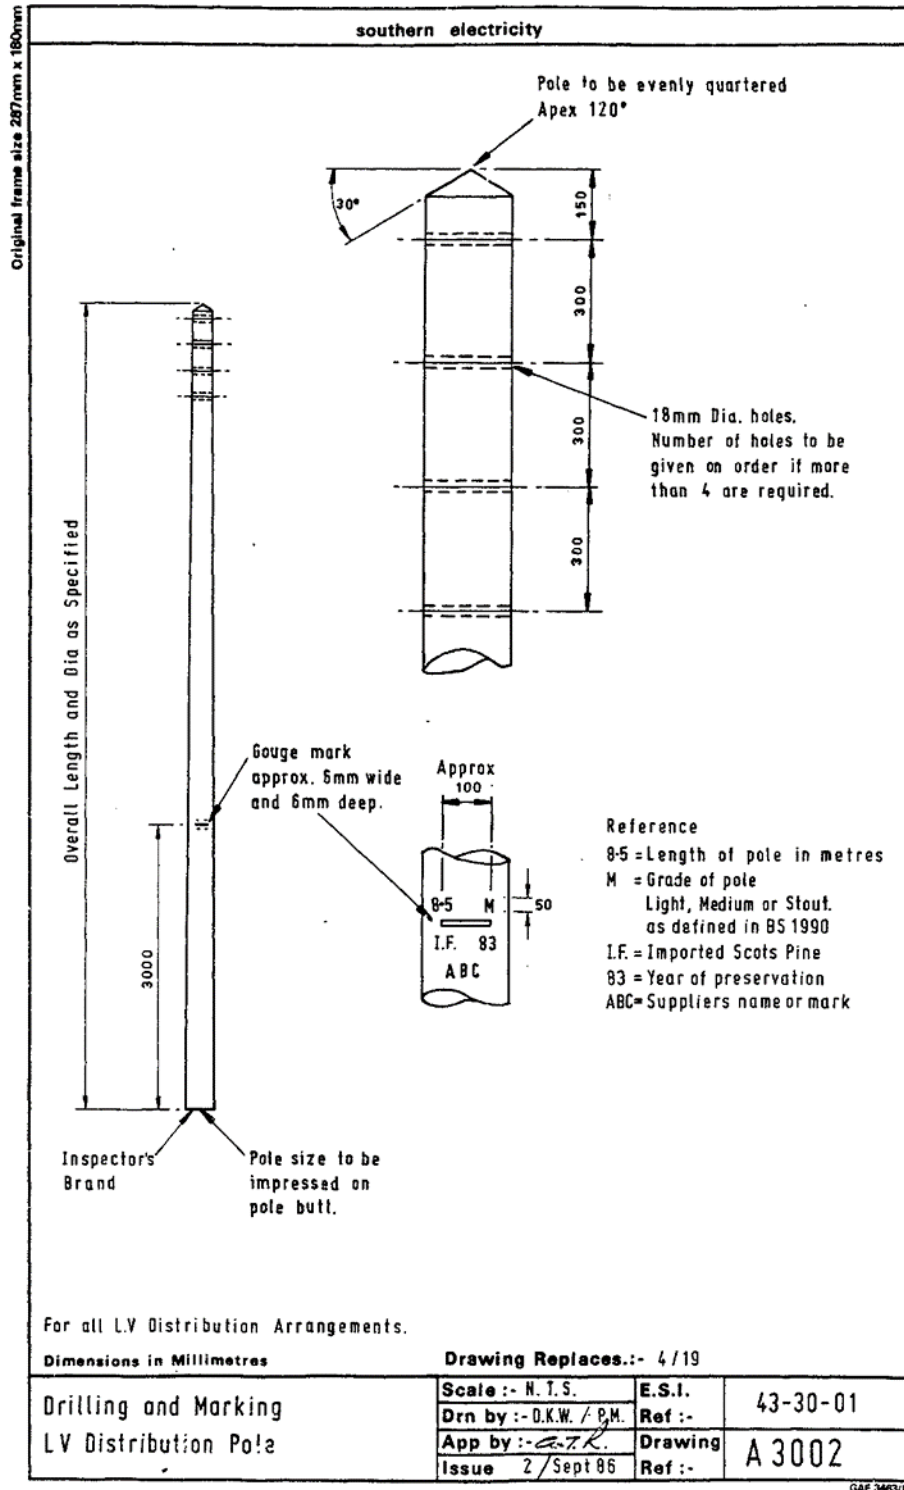


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

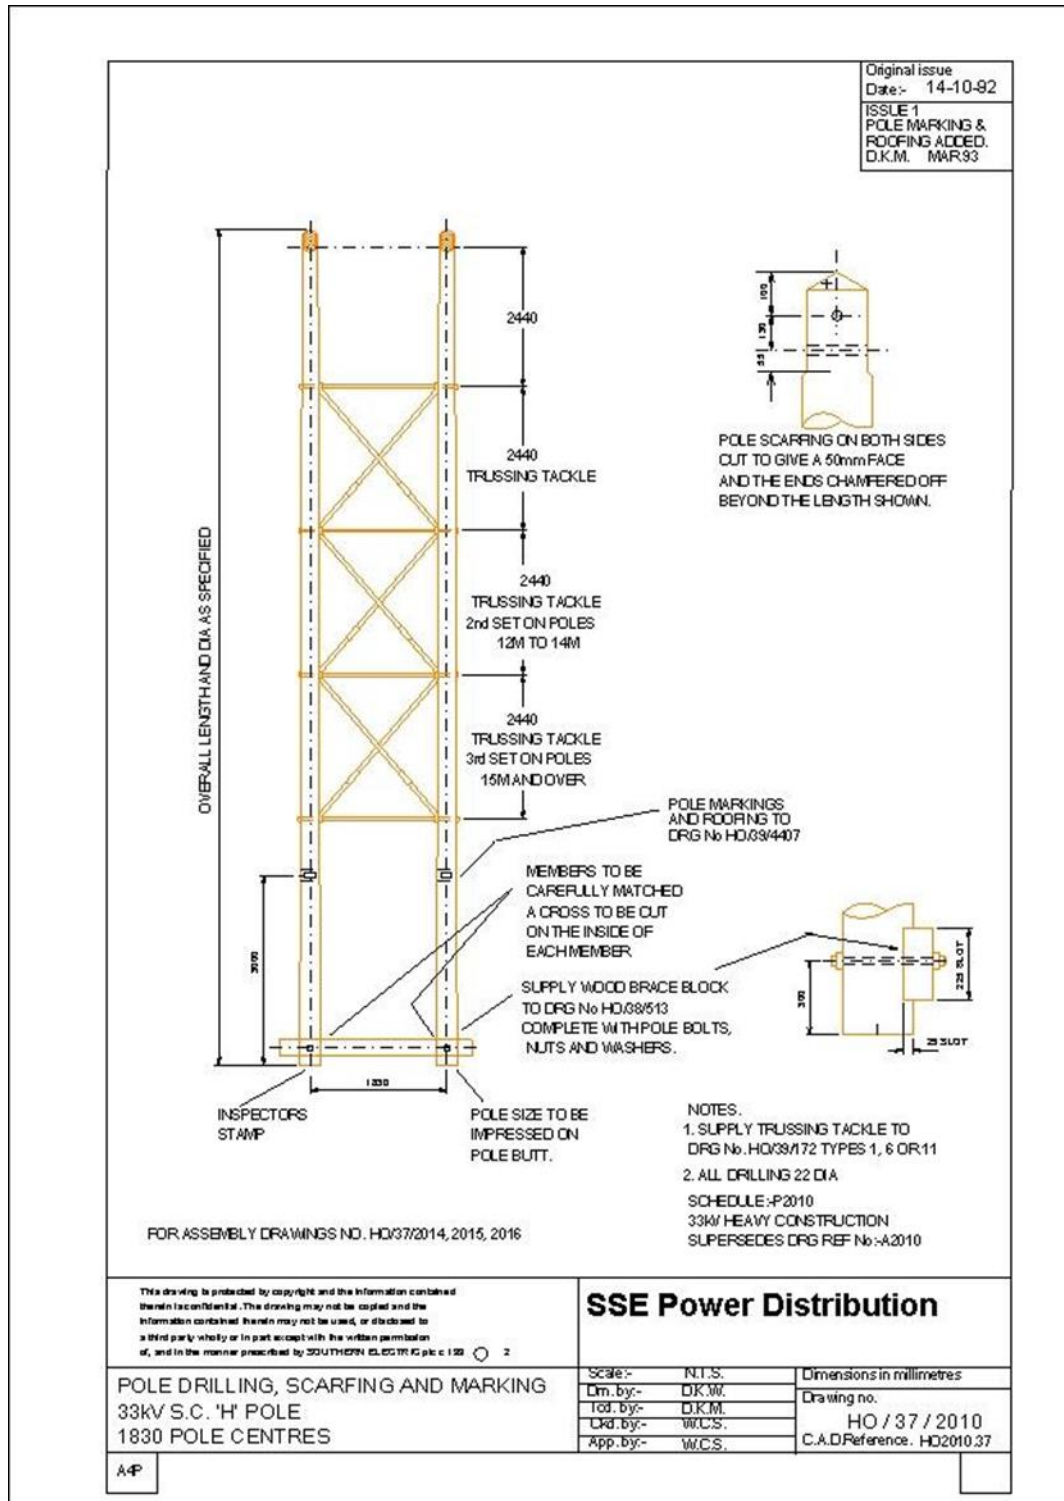

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

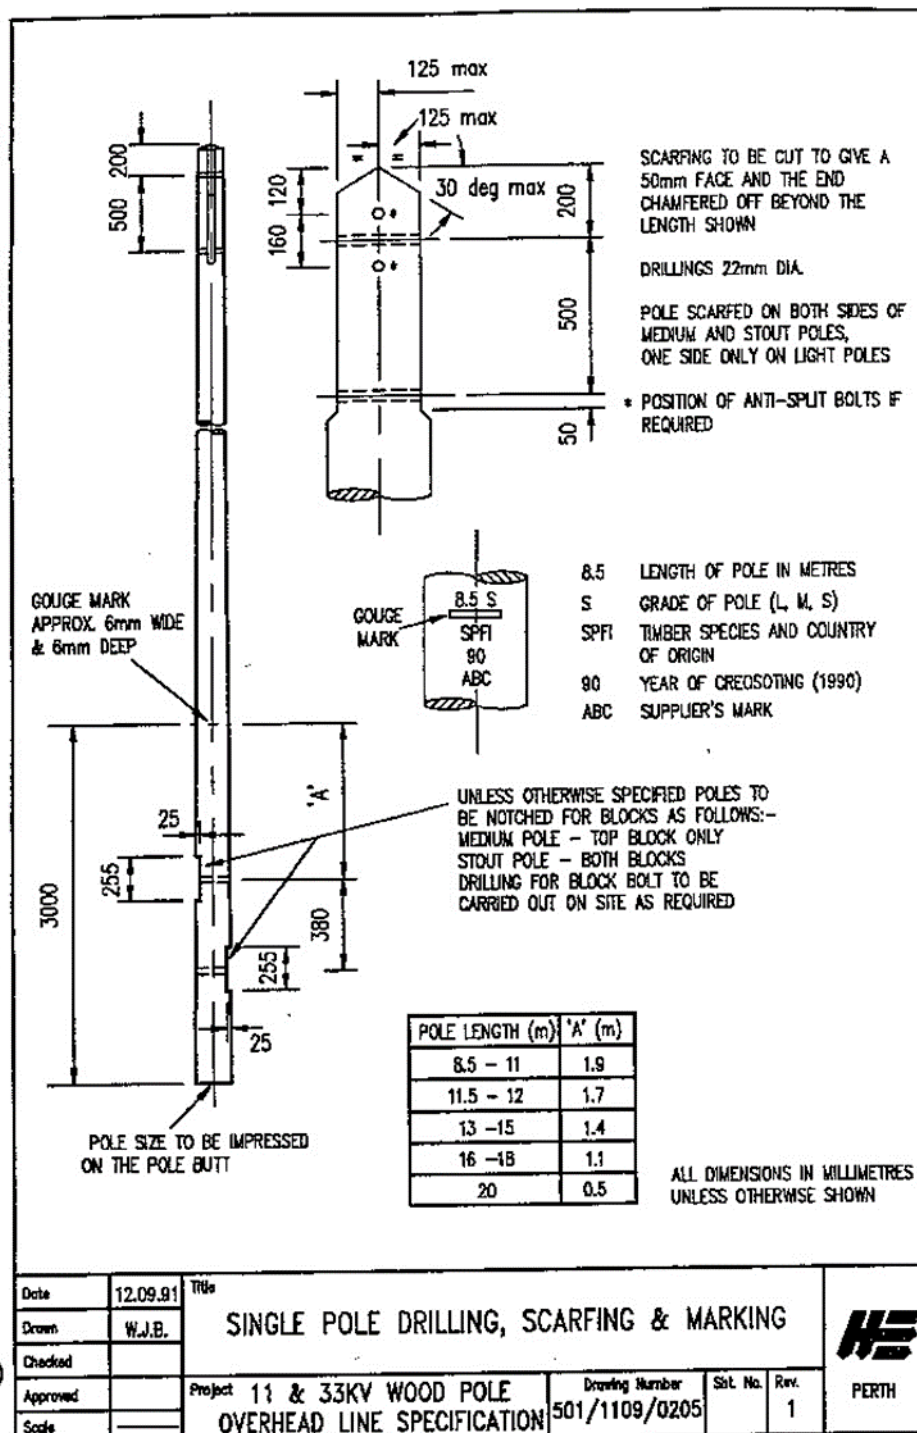

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	✓	Review Date: September 2029

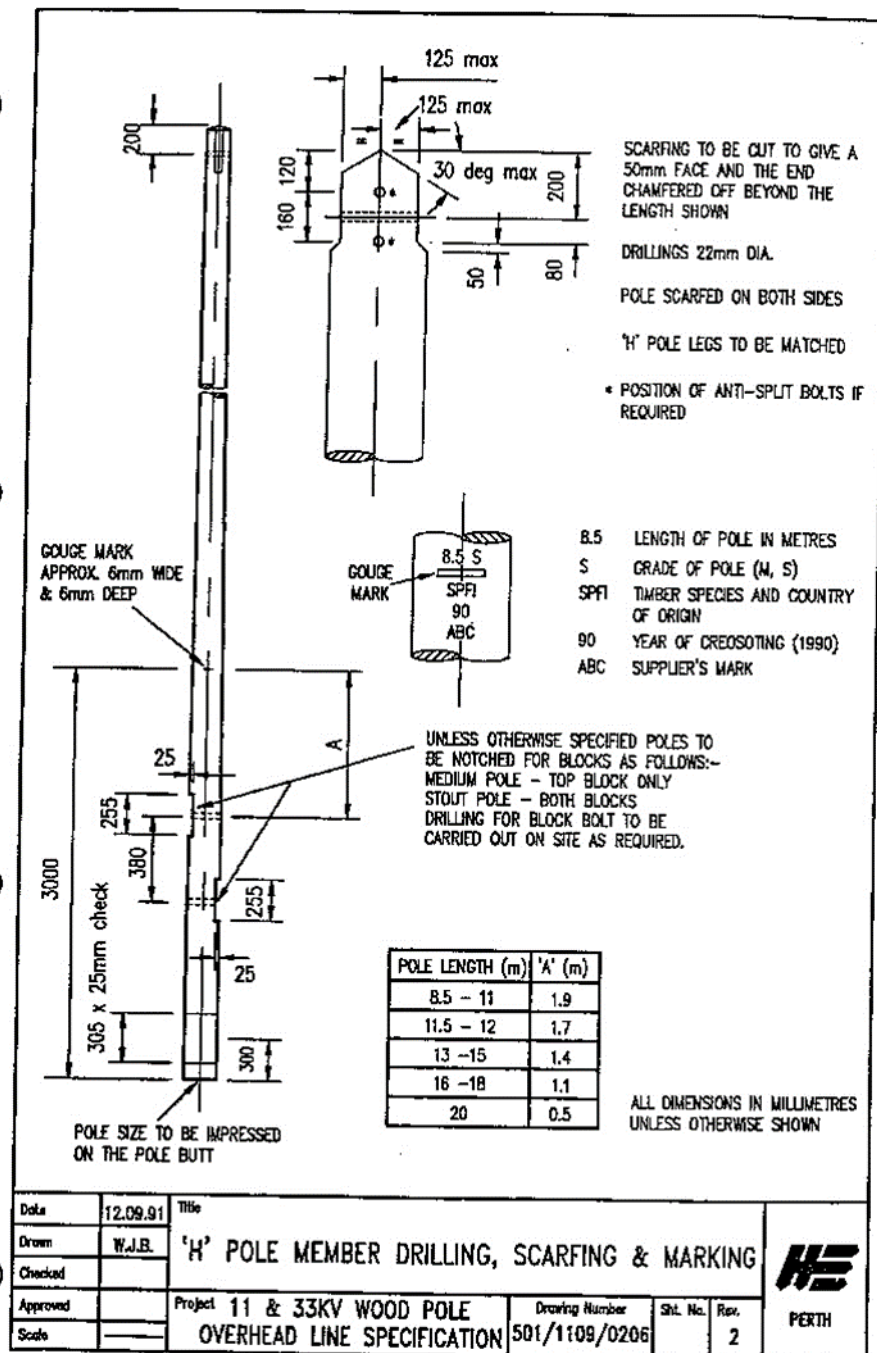


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Original Issue:- 1 Date:- May 82 Issue. 4 Redrawn H.M.W. May 92	
Ordering Details:- When ordered as a Kicking Block with Pole supply N20 Bolt, Nut, Washer, Square Flat Washer to Commodity Code 06-953-1 Application:- For use with Stay Rod to Commodity Code 17-620-8 and various Pole Structures. Material / Spec:- ESI Technical Specification 43-88	
Commodity Code 17-410-9	
Drawing no. H0/38/317	SOUTHERN ELECTRIC Wooden Stay / Kicking / and Compression Block (1300mm) Light / Heavy Construction
This drawing is protected by copyright and the information contained therein is confidential. The drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRIC plc © 1992	
Scale:- N. T. S. Dim. by:- Tcd. by:- H.M.W. App. by:-	Dimensions in millimetres Drawing no. H0/38/317

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

Original Issue 1 Date:- 22 MAY 1992 Issue 2 REDRAWN ON C.A.D. LENGTH AND COMMODITY CODE CHANGED. PEC /WCS 5 DEC. 1994																
ORDERING DETAILS :- FOR KICKING BLOCK APPLICATION SUPPLY POLE WITH M20 BOLT, NUT, WASHER AND SQUARE FLAT WASHER TO COMMODITY CODE 06-953-1 APPLICATION :- FOR USE AS KICKING BLOCK. MATERIAL /SPEC :- ESI TECHNICAL SPECIFICATION 43 - 88 COMMODITY CODE 17-426-4																
UNCONTROLLED COPY SUBJECT TO REVISION																
This drawing is protected by copyright and the information contained therein is confidential. The drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part without the written permission of SSE Power Distribution.																
WOODEN KICKING BLOCK (1750mm)																
SSE Power Distribution <table border="1"> <tr> <td>Scale:-</td> <td>NTS</td> <td>Dimensions in millimetres</td> </tr> <tr> <td>Des. by:-</td> <td>HMB</td> <td>Drawing no.</td> </tr> <tr> <td>Trd. by:-</td> <td></td> <td>HO /38 / 331</td> </tr> <tr> <td>Ckd. by:-</td> <td></td> <td>C.A.D Reference. HO0331.28</td> </tr> <tr> <td>App. by:-</td> <td>WCS</td> <td></td> </tr> </table>		Scale:-	NTS	Dimensions in millimetres	Des. by:-	HMB	Drawing no.	Trd. by:-		HO /38 / 331	Ckd. by:-		C.A.D Reference. HO0331.28	App. by:-	WCS	
Scale:-	NTS	Dimensions in millimetres														
Des. by:-	HMB	Drawing no.														
Trd. by:-		HO /38 / 331														
Ckd. by:-		C.A.D Reference. HO0331.28														
App. by:-	WCS															
A4P																


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

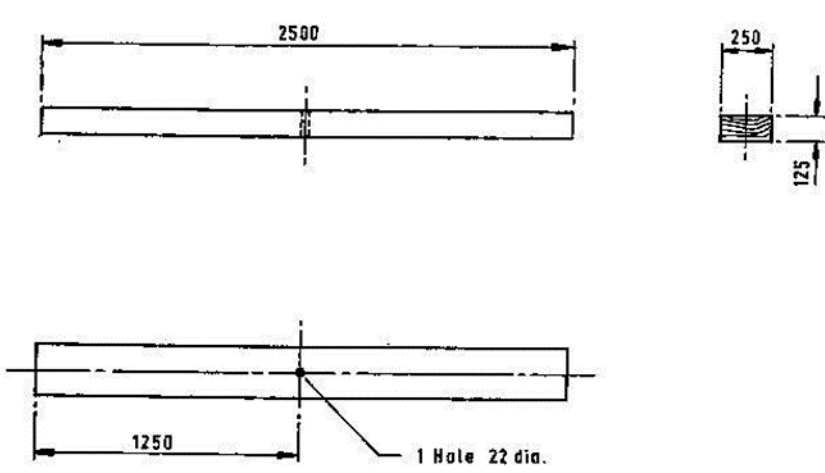		Original Issue:- 1 Date:- Sept. 92 Issue 2 Oct. 92 Redrawn and Modified PEC
Ordering Details : When ordering with Pole, Block to be supplied with M20 Bolt, Nut and Washer. Washer, Square, Flat, Drg. No. H0/38/075 Washer, Square, Curved, Drg. No. H0/38/559		
Application : Twin Poles Double Circuit Material/Spec : E.S.I. Standard 43-88 and 43-91		
		Comm Code 19-117-3
		Supersedes Drg. Ref. 19-117-3
Drawing no. H0/38/516	SSE Power Distribution	This drawing is protected by copyright and the information contained therein is confidential. This drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRIC plc © 1992 Scale:- NTS Dwn. by:- D K W Tcd. by:- P E C App. by:- R C H
	Wood Kicking Block for Twin Poles	
At		Dimensions in millimetres Drawing no. H0/38/516 4326-650 DEARL (UK) LTD.


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

		Original issue:- 1 Date:- Sept. 86 Issue 2 Oct. 92 Redrawn and Modified P.E.C.
Ordering Details: When ordering with Pole, Block to be supplied with M20 Bolts, Nuts and Washers Washer, Square, Flat, Drg. No. H0/38/075 Washer, Square Curved, Drg. No. H0/38/559		
Application: 'H' Poles Single Circuit Material / Spec: ES1 Standard 43-88 and 43-91		
Comm. Code 19-114-4 Supersedes Drg Ref 19-114-4		
Drawing no. H0/38/513 A4	SSE Power Distribution	This drawing is protected by copyright and the information contained therein is confidential. The drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRIC plc © 1992
	Wood Brace Block for 'H' Pole (1830 Pole Centres)	Scale:- 1:1 Dm. by:- HMB Tcd. by:- P.E.C. App. by:- A.T.R.
	Dimensions in millimetres	Drawing no. H0/38/513
	4326-690 DEALING UNIT LTD.	

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

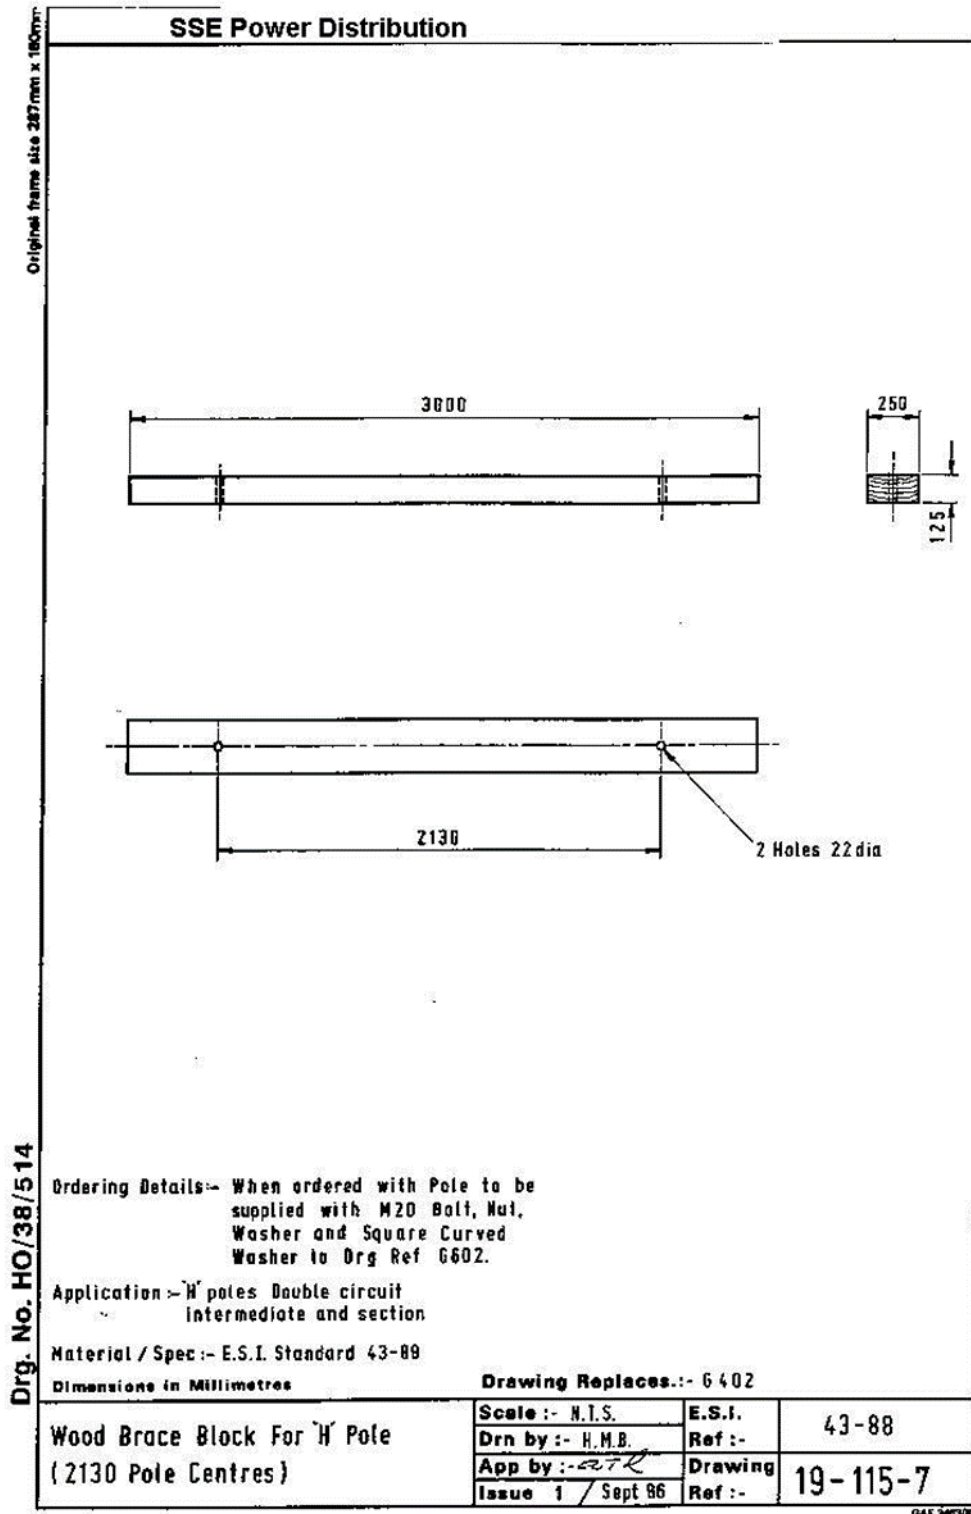

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

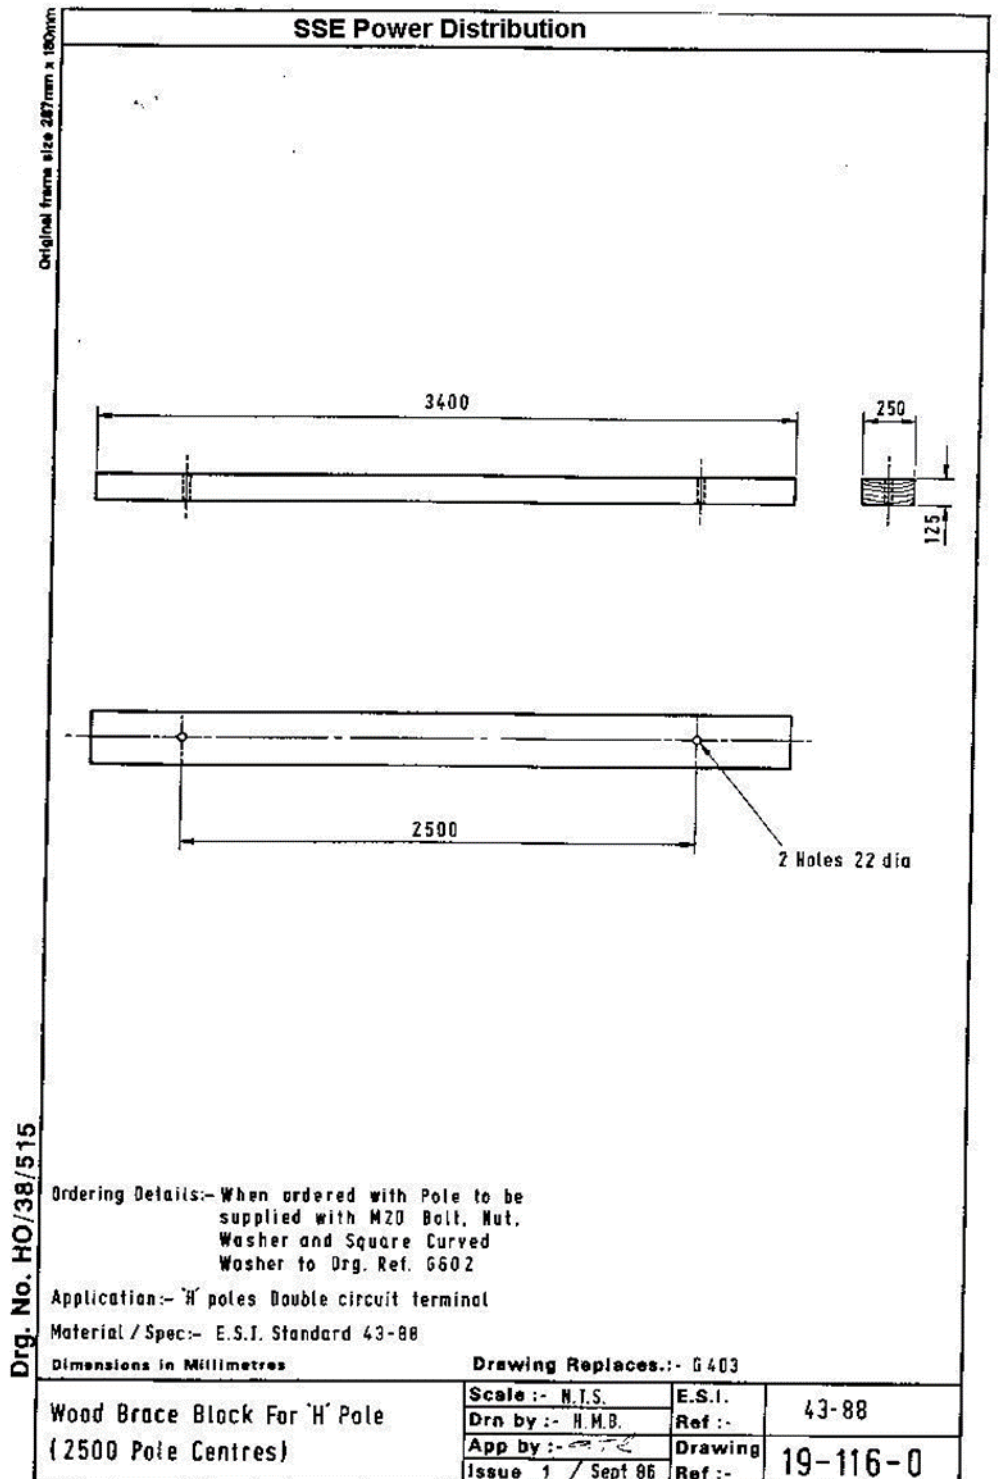


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

		Original issue 1 Date:- SEP.1986 ISSUE 3 REDRAWN ON CAD APPLICATION & MATERIAL AMENDED A.J.S./W.C.S. 18.JUN.1993	
		GENERAL TOLERANCE +1mm DIAMETER, +5mm LENGTH. APPLICATION:- FOR PLUGGING HOLE MADE WITH THE MATTSON BORER SIZE No.3 INCREMENT BORER. MATERIAL:- SEASONED HARDWOOD SPEC:- EA TECHSPEC 43-88 COMMODITY CODE 19-109-2	
UNCONTROLLED COPY SUBJECT TO REVISION			
This drawing is protected by copyright and the information contained therein is confidential. This drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRICITY plc c 19		SSE Power Distribution	
CREOSOTED POLE PLUG		Scale:- 1:1 Dim. by:- D.K.W. Red. by:- A.J.S. Ckd. by:- W.C.S. App. by:- W.C.S.	Dimensions in millimetres Drawing no. HO / 38 / 508 C.A.D. Reference: HO080838
A4P			


SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

		Original issue 1 Date:- SEPT.1996 ISSUE 2 REDRAWN ON CAD APPLICATION & MATERIAL AMENDED A.J.S./W.C.S. 18.JUN.1993	
GENERAL TOLERANCE +1mm DIAMETER, +5mm LENGTH. APPLICATION:- FOR PLUGGING UNUSED L.V. POLE HOLES. (11/16 INCH OR 18mm DIAMETER) MATERIAL:- SEASONED HARDWOOD SPEC:- EA TECHSPEC 43-88 COMMODITY CODE 19-110-2			
UNCONTROLLED COPY SUBJECT TO REVISION			
This drawing is protected by copyright and the information contained therein is confidential. This drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRICITY plc. 19		SSE Power Distribution	
CREOSOTED POLE PLUG		Scale:- 1:1 Des. by:- D.K.W. Rev. by:- A.J.S. Dra. by:- W.C.S. App. by:- W.C.S.	Dimensions in millimetres Drawing no. HO/38/509 C.A.D Reference: HO050938
A4P			

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

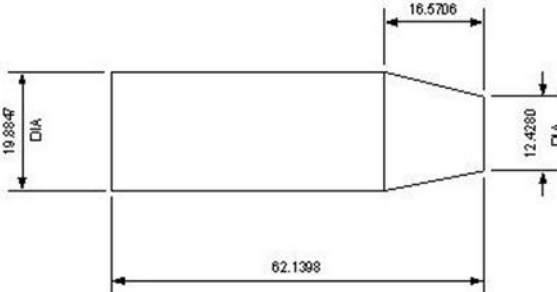		Original issue 1 Date:- SEPT.1986 ISSUE 2 REDRAWN ON CAD APPLICATION & MATERIAL AMENDED A.J.S./W.C.S. 18.JUN.1993	
		GENERAL TOLERANCE + 1mm DIAMETER, + 5mm LENGTH. APPLICATION:- FOR PLUGGING UNUSED H.V. OR L.V. POLE HOLES. (13/16 INCH OR 22mm DIAMETER) MATERIAL:- SEASONED HARDWOOD SPEC:- EA TECHSPEC 43-88 COMMODITY CODE 19-111-5	
UNCONTROLLED COPY SUBJECT TO REVISION			
This drawing is protected by copyright and the information contained herein is confidential. The drawing may not be copied and the information contained therein may not be used, or disclosed to a third party wholly or in part without the written permission of, and in the manner prescribed by SOUTHERN ELECTRIC plc or its subsidiaries.		SSE Power Distribution	
CREOSOTED POLE PLUG		Scale:- 1:1 Dm. by:- D.K.W. Red. by:- A.J.S. Ckd. by:- W.C.S. App. by:- W.C.S.	Dimensions in millimetres Drawing no. HO / 38 / 510 C.A.D. Reference: HD0510.38
A4P			

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

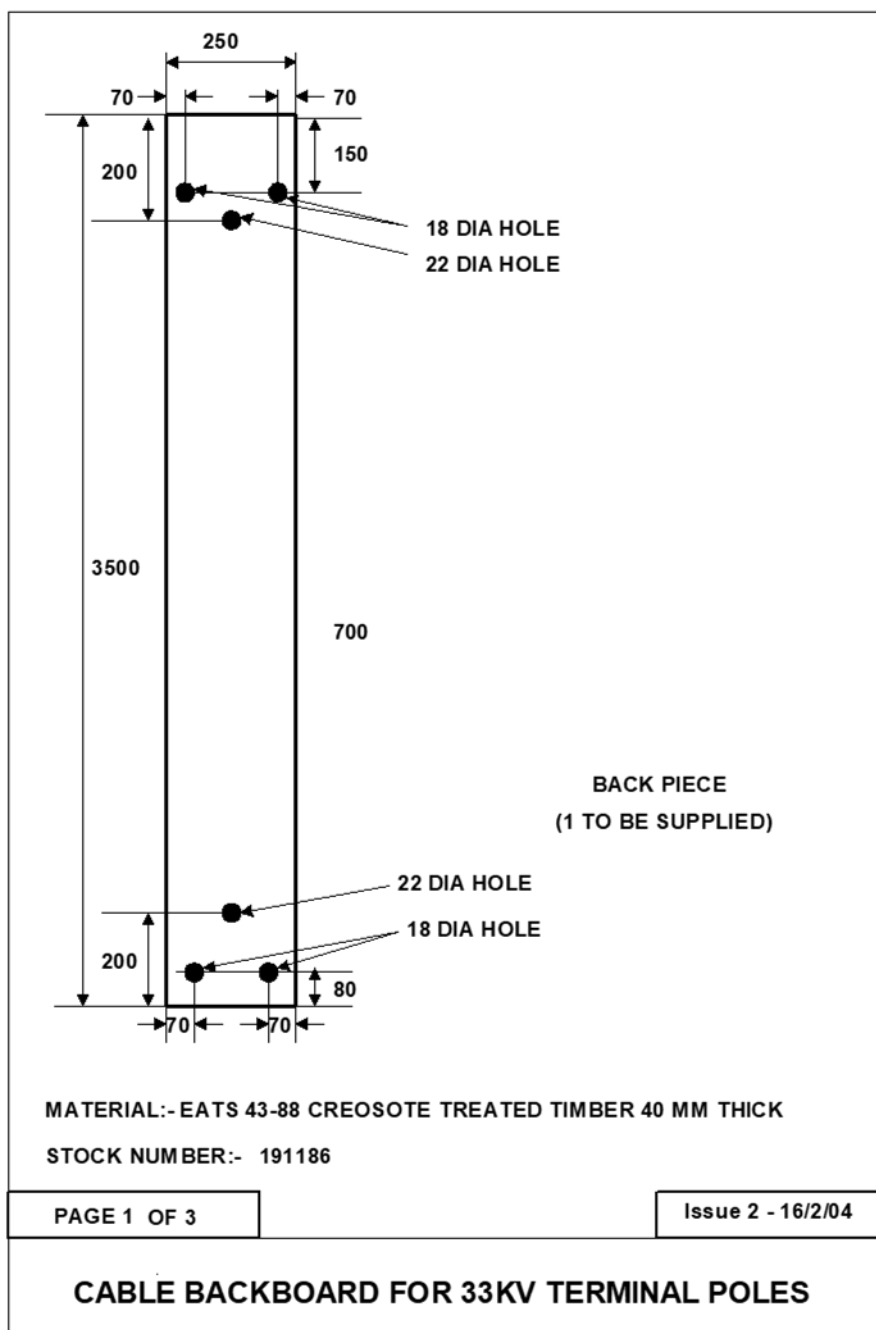

SP-NET-OHL-007	Specification for Wood Poles, Blocks and Associated Components		Applies to	
			Distribution ✓	Transmission
Revision: 1.00	Classification: Internal	Issue Date: September 2021	Review Date: September 2029	

