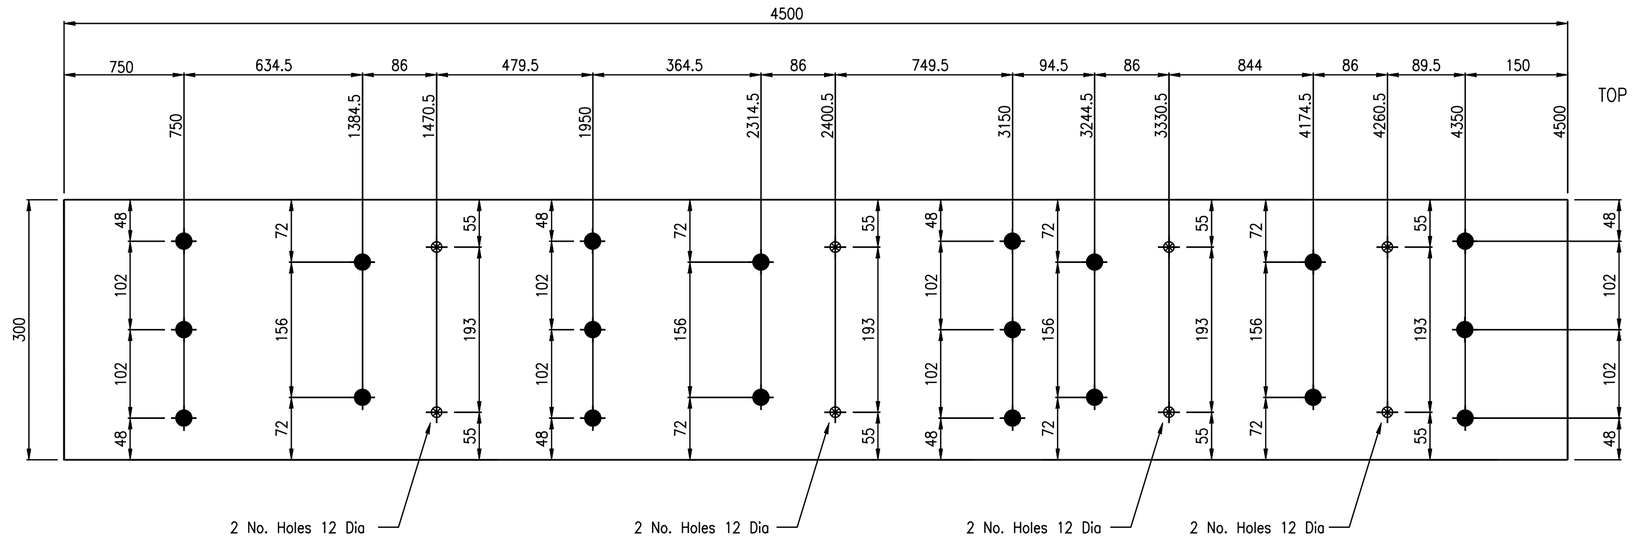


ALL HOLES 17.5 DIA UNO

300x50 DEAL WOOD PRESSURE CREOSOTED

NOTE.
The drillings in this backboard are to suit Torgy C120/M16/101 and Bicon 370BA07 cable cleats and replaces Cable Backboard marked 435014, on pole mounted cable termination assembly.

Existing backboard 435014 may be modified on site to suit availability

NOTES

1. All dimensions in millimetres.
2. All material shall be in accordance with the requirements of BS EN 10025.
3. Galvanising shall be in accordance with BS EN ISO 1461.
4. Welding shall be in accordance with BS EN 1011-2.
5. All fabrication shall be in accordance with the requirements of ENATS 43-125 section 11.
6. This drawing is based on Cable backboard as shown on ENATS drawing 435014.

A2/PTD/6547/145

Designer's site specific risk assessment

By: I.Ridgway | Date: 15/03/16

☐ No works associated with this drawing

☒ Controlled by existing procedure/work instruction

☐ Special control required:-

☐ Detailed on drawing
☐ Detailed on separate document

☒ No temporary works required

☐ Temporary works required and documented separately

☐ Drawing contains temporary works:

0 Generic or proprietary solution
1 Specific basic design
2 Specific design
3 High risk or specialist design

} Complete temporary works design check certificate: DE-SF-081

Red
OK to proceed providing specific design hazards and risks have been recognised, acknowledged and understood by the operation team. Site operatives may require additional instruction/training

Amber
OK to proceed as detailed in existing work instruction or procedure detailed on drawing or separate document.

Green
OK to proceed, no significant design hazards and risks, standard control measures apply.

CDM REGULATIONS RESIDUAL RISKS

Design based hazards are actively eliminated where possible. Where hazards cannot be eliminated, this symbol along with an attached note will identify the hazard and indicate that an action is required by the person supervising the works to manage the design hazard during construction.

Other than those noted, we are not aware of any further residual design risks apart from those that a competent contractor would ordinarily consider.

ISSUE	DATE	DRN	REVISION	CHK'D	APP'D
A			FIRST ISSUE		

BHLARAIDH/BEINNEUN SCHEME OVERHEAD LINE WORKS

CIRCUIT :-
FORT AUGUSTUS - GLENMORISTON (FM)
FORT AUGUSTUS - CEANNACROC (FC)

SSE

TITLE :-

PIECE SMALL DETAIL FOR CABLE BACKBOARD

JOB No	-	DATE	16/03/16
DRAWN	TES	CHKD	DPC
DESIGN	IR	APPD	WJ

Balfour Beatty

© Balfour Beatty plc 2016
THE COPYRIGHT IN THIS DRAWING & THE DESIGN RIGHT IN THE ARTICLE(S) DEPICTED BELONG TO BALFOUR BEATTY PLC OR ITS SUBSIDIARY. THE DRAWING MAY NOT BE COPIED BY ANY MEANS (INCLUDING TRACING) OR STORED AS A MICROFILM, AS A CAD FILE, OR CD-ROM OR IN ANY OTHER ELECTRONIC FORM. NOR MAY ARTICLES BE MADE FROM THE DRAWING, EITHER DIRECTLY OR INDIRECTLY, WITHOUT THE PRIOR WRITTEN CONSENT OF BALFOUR BEATTY PLC OR ITS AUTHORISED REPRESENTATIVES.

SCALE :- N.T.S

DRAWING No.
A2/PTD/6547/145

SSE CONTRACT No.	MSTN
-	
SSE DRAWING No.	A2
-	

A