


SEE TABLE BELOW

SPACING OF CLEAT CROSSARMS

LENGTH OF POLE IN METRES	DIMENSION 'A' IN mm	T IN mm	U IN mm	V IN mm	W IN mm	X IN mm	Y IN mm	Z IN mm
10	680	–	–	–	–	–	–	–
10.5	1180	750	–	–	–	–	–	–
11	1680	1250	750	–	–	–	–	–
11.5	2180	1500	750	–	–	–	–	–
12	2680	1750	750	–	–	–	–	–
13	3680	2750	1750	750	–	–	–	–
14	4380	3525	2600	1675	750	–	–	–
15	5380	4510	3570	2630	1690	750	–	–
16	6380	5500	4550	3600	2650	1700	750	–
17	7380	6510	5550	4590	3630	2670	1710	750

TYPICAL MARKINGS FOR WOOD POLES.




12 LENGTH OF POLES IN METRES.
290 DIAMETER OF POLE IN MILLIMETRES AT 1500mm FROM THE BUTT.
IF SPECIES CODE.
87 YEAR OF IMPREGNATION.
θ NAME OR MARK OF CREOSOTING FIRM.

DRILLINGS AND MARKINGS

I. ALL HOLES TO BE 22mm DIA. UNLESS OTHERWISE STATED.
II. 75x6x6mm GOUGE MARK 3000mm UP FROM BUTT ON INSIDE OF LEGS.
III. BUTT TO BE SAWN OFF SQUARE TO THE AXIS OF THE POLE.
IV. POLE TO BE MARKED AS PER. INSET.
V. IT IS ESSENTIAL THAT THE DRILLINGS ARE DRILLED TO TEMPLATE, ARE ACCURATE AND DEAD CENTRE.
VI. LEGS OF 'H' POLE TO BE CAREFULLY MATCHED.
VII. THE FOLLOWING INFORMATION TO BE IMPRESSED ON END GRAIN OF BUTT OF POLE :-
a) LENGTH AND DIAMETER OF POLE.
b) POLE NUMBER IN ACCORDANCE WITH SCHEDULE.


NOTE:- THE PERSONAL MARK OF THE POLE INSPECTOR WILL BE IMPRESSED ON THE BUTT.

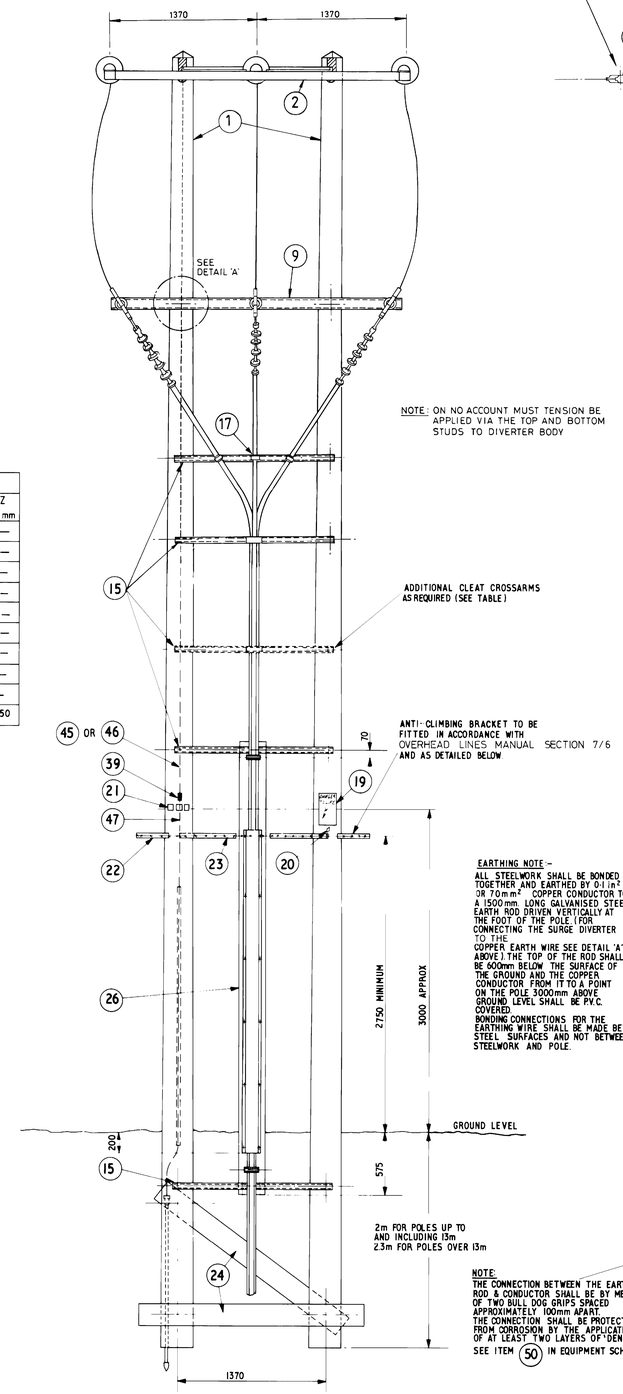

NOTE: ON NO ACCOUNT MUST TENSION BE APPLIED VIA THE TOP AND BOTTOM STUDS TO DIVERTER BODY


EARTHING NOTE :-
ALL STEELWORK SHALL BE BONDED TOGETHER AND EARTHED BY 0·1 in² OR 70mm² COPPER CONDUCTOR TO A 1500mm. LONG GALVANISED STEEL EARTH ROD DRIVEN VERTICALLY AT THE FOOT OF THE POLE (FOR CONNECTING THE SURGE DIVERTER TO THE COPPER EARTH WIRE SEE DETAIL 'A' ABOVE). THE TOP OF THE ROD SHALL BE 600mm BELOW THE SURFACE OF THE GROUND AND THE COPPER CONDUCTOR FROM IT TO A POINT ON THE POLE 3000mm ABOVE GROUND LEVEL SHALL BE PVC COVERED.
BONDING CONNECTIONS FOR THE EARTHING WIRE SHALL BE MADE BETWEEN STEEL SURFACES AND NOT BETWEEN STEELWORK AND POLE.

NOTE:
THE CONNECTION BETWEEN THE EARTH ROD & CONDUCTOR SHALL BE BY MEANS OF TWO BULL DOG GRIPS SPACED APPROXIMATELY 100mm APART. THE CONNECTION SHALL BE PROTECTED FROM CORROSION BY THE APPLICATION OF AT LEAST TWO LAYERS OF 'DENSO TAPE' SEE ITEM (50) IN EQUIPMENT SCHEDULE.

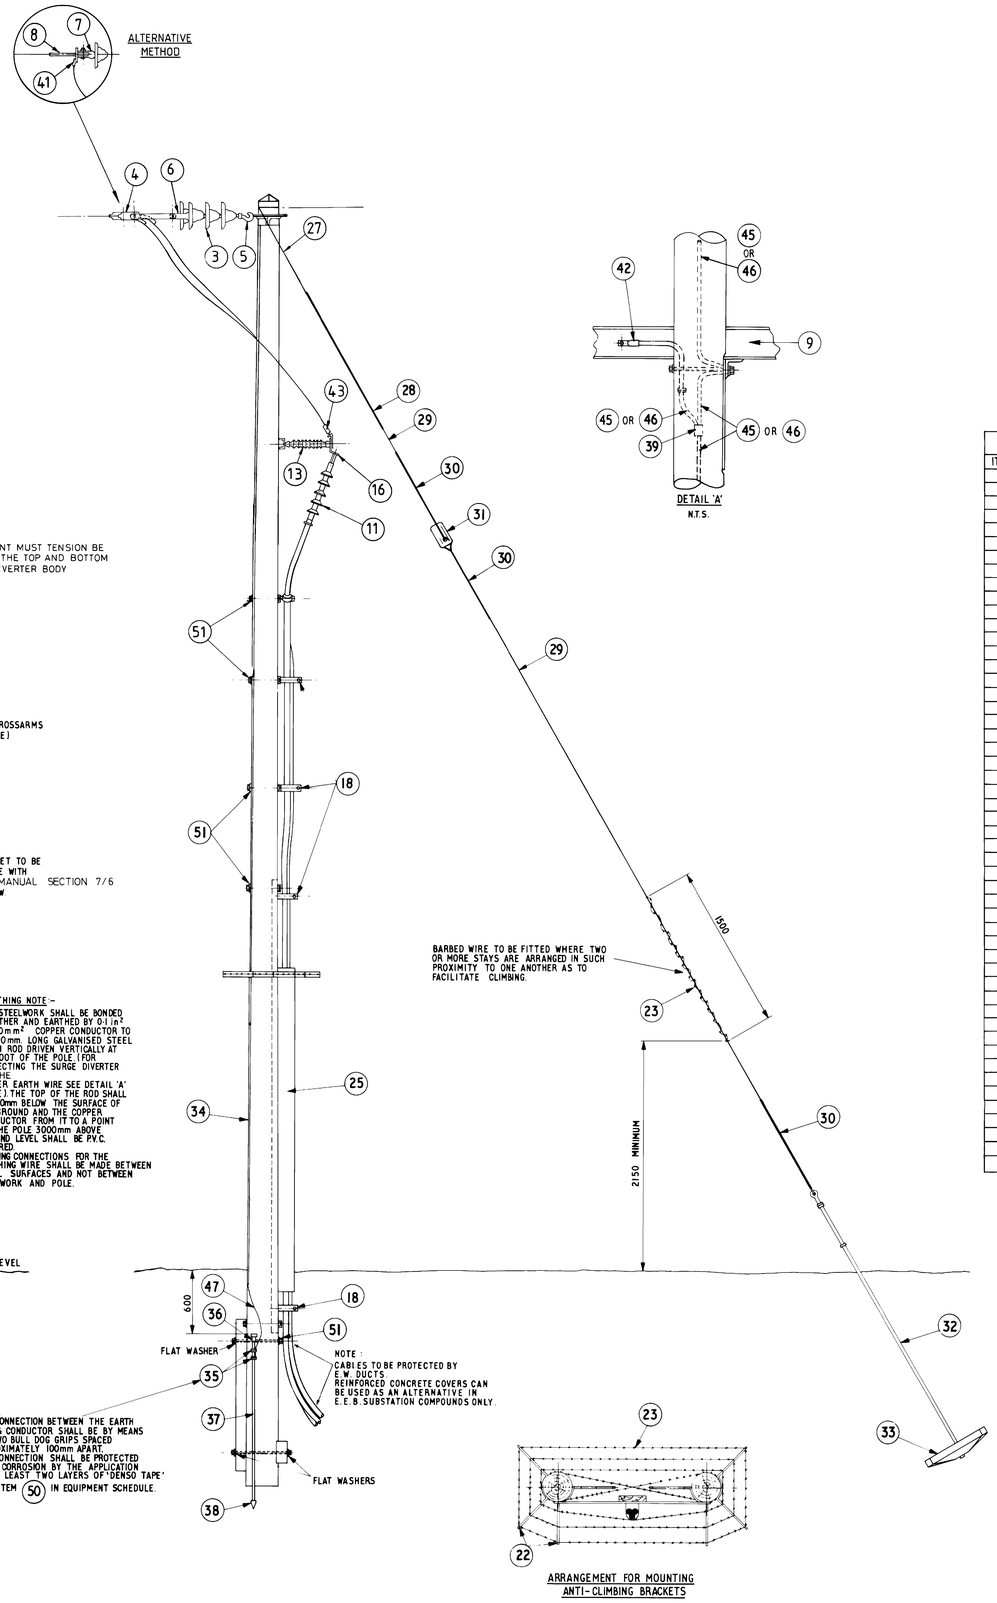

ARRANGEMENT FOR MOUNTING ANTI-CLIMBING BRACKETS

NOTE :-



EQUIPMENT SCHEDULE

ITEM No.	DESCRIPTION	DRG. No.
1	POLE	TO SPECIFICATION
2	CROSSARM	S.18634 B
3	10" (254mm) DISC INSULATOR	S.19042 S
4	CONDUCTOR WEDGE CLAMP	20180 R
5	BALL ENDED HOOK	S.19003V
6	SOCKET TONGUE	S.18040 X
7	SOCKET CLEVIS	S.18022 A
8	COMPRESSION DEADEND	20930 N
9	SUPPORT CROSSARM	S.18240 G
10	SUPPORT INSULATOR	—
11	CABLE TERMINATION	—
12		
13	SURGE DIVERTER	IB050F
14		
15	BACKBOARD AND CLEAT CROSSARM	S.18632 J
16	COMPRESSION TERMINAL	1A73702
17	SINGLE WAY CABLE CLEAT (NEOPRENE INSERT)	S.18422 S
18	TREFOIL CABLE CLEAT (SINGLE BOLT FIXING)	S.18408 E
19	DANGER NOTICE	S.19214 V
20	NUMBER/ LETTER PLATE	S.19265-69 S.19272-77
21	PHASE IDENTIFICATION PLATES	S.19231-33
22	ANTI-CLIMBING BRACKET	S.18916 R
23	BARBED WIRE	S.19977 X
24	BRACE BLOCK, 2100 x 200 x 100 mm	S.18059 J
25	CABLE GUARD, 3000mm LONG	S.18933 F
26	WOOD BACKBOARD, 4200 x 250 x 50 mm	S.18054 Q
27	POLE TOP MAKE OFF	S.19426 E
28	LINE SPLICE	S.19432 C
29	STAY WIRE	S.19984 E
30	GUY GRIP DEAD END	S.19427 N
31	STAY INSULATOR	S.19162 M
32	22mm DIA. ADJUSTABLE STAY ROD.	S.19391K
33	STAY BLOCK.	S.18065 G
34	PVC EARTH WIRE GUARD 2400mm LONG	S.18942 E
35	BULL DOG GRIP (2 No. REQD.)	S.19358 Q
36	COUPLING	S.19359 Y
37	1500mm LONG EXTENSIBLE EARTH ROD	S.19355 P
38	DRIVING POINT	S.19357 G
39	COPPER CRIMPIT	21207X
40		
41		
42	CU LUG 14mm HOLE	S.21110Q
43	BI-METAL LUG	21154 F
44	BI-METAL STRAIGHT	21314 J
45	RECOVERED 0·1 in² (7/.136) H.D. BARE COPPER	05299Q
46	70mm² (19/2.14) S.D. BARE ANNEALED COPPER	05300X
47	70mm² (19/2.14) PVC. COVERED ANNEALED COPPER	05667S
48		
49	ALUMINIUM STRIP (40 x 6mm AL. ALLOY-EIE-M 10 B.S. 2898)	14095V
50	'DENSO' TAPE, 50mm WIDE	12891R
51	CURVED WASHER FOR M20 DIA. BOLTS	S19910R

Version	Date	DESCRIPTION	Designed Drawn
D	04·11·96	DRAWING SCANNED	PSB
C	01·05·95	NEW SURGE DIVERTORS ARRANGEMENTS	MK
B	25·10·90	DRG. NO. ADDED TO ITEM 16	AR
A	17/09/1982	ORIGINAL	DL CK

UK Power Networks

33KV HEAVY CONSTRUCTION
TERMINAL POLE WITH CABLE TERMINATION

SCALE 1:20 @A0 AS ERECTED Checked Approved

DRAWING NO. B1274 Version D

SITE Standard Drawings

Copyright owned by UK Power Networks. This drawing may not be used or copied without written consent.