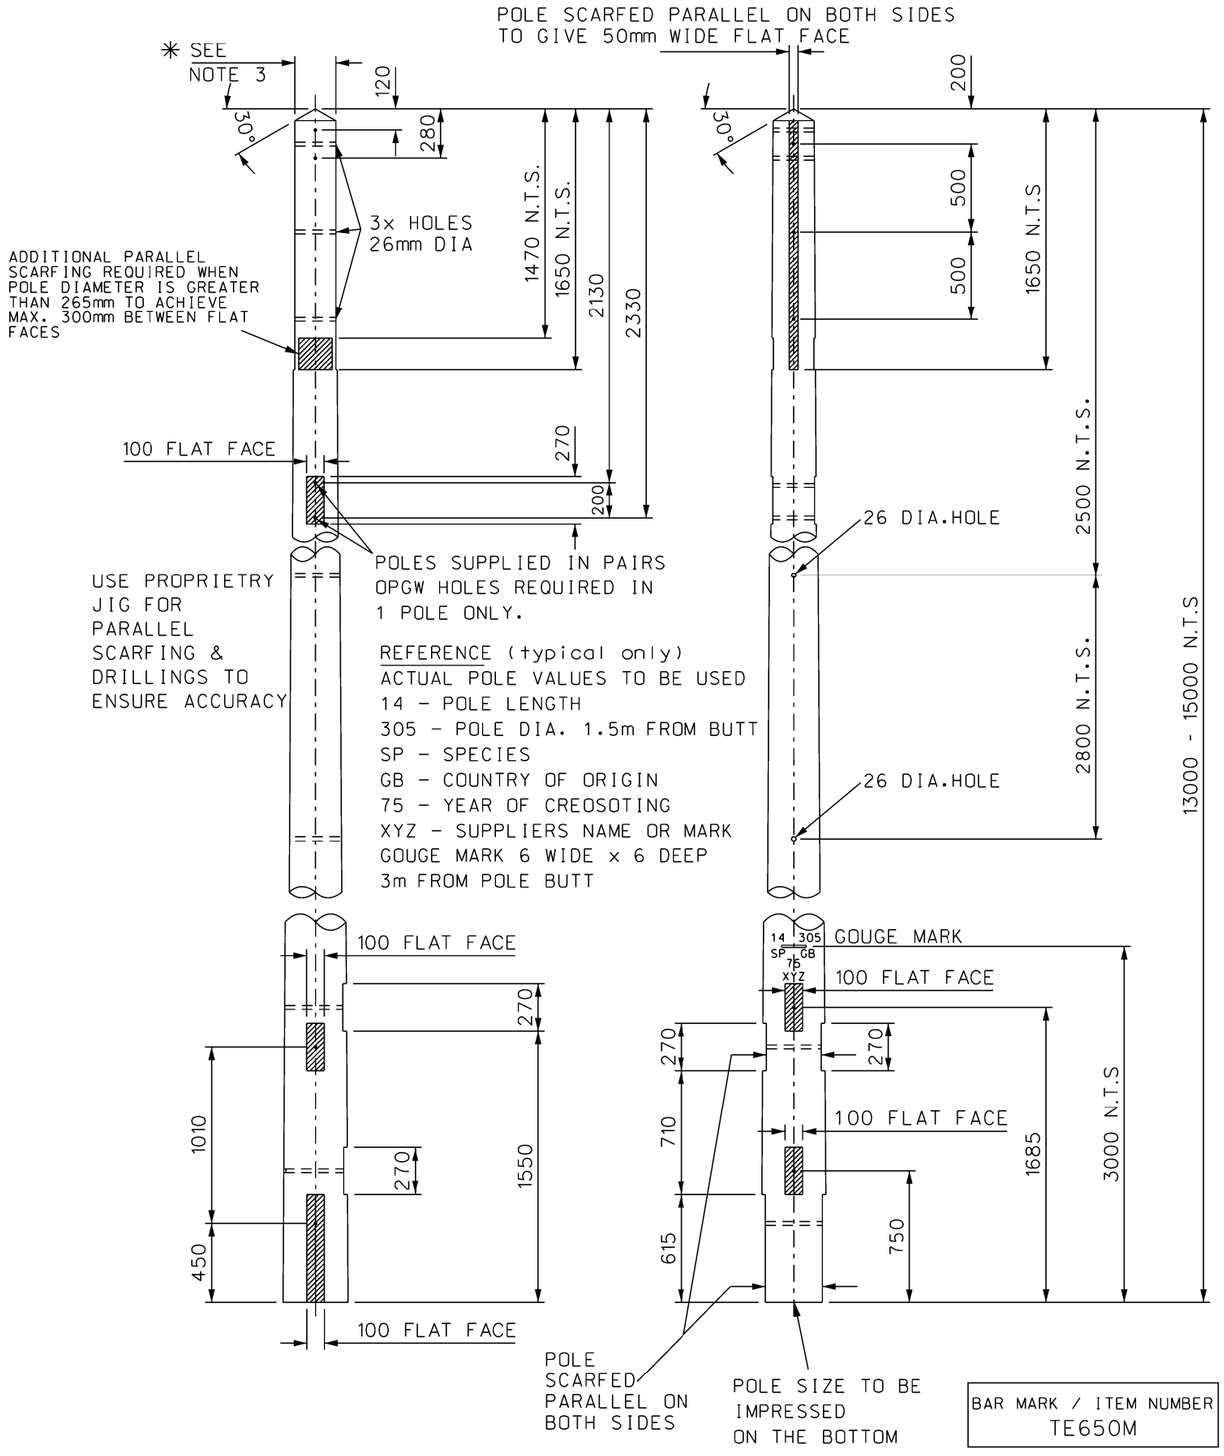


BAR MARK / ITEM NUMBER
TE650M

GENERAL NOTES:

1. ALL DRILLINGS TO BE 24mm DIAMETER HOLES UNLESS OTHERWISE NOTED
2. POLE SIZES ARE EXTRA STOUT POLES & TO BE BASED ON DIMENSIONS GIVEN IN SPEN SPECIFICATION OHL-03-132 ISSUE 2.
3. RANGE OF POLES IS LENGTH 13m TO 15m. MINIMUM DIAMETER 1.5m FROM BUTT = 410mm (13m SECTION), 425mm (14m SECTION), & 450mm (15m SECTION). MINIMUM POLE TOP DIAMETER = 233mm (13m SECTION), 233mm (14m SECTION) & 240mm (15m SECTION).
4. POLES TO BE PARALLEL WITHIN LIMITS AT LOCATION AS INDICATED ON THIS DRAWING.
 - ✳ MINIMUM TOP DIST BETWEEN FLATS = 200mm
 - ✳ MAXIMUM TOP DIST BETWEEN FLATS = 265mm
5. SCARFING & DRILLING SHALL BE TO THE DIMENSIONS AS SPECIFIED IN THIS DRAWING. STATED MINIMUM & MAXIMUM VALUES SHALL NOT BE EXCEEDED.

 REQUIREMENTS UNDER OHL-03-005 ISSUE 5 (DATED MAY 2015) SHALL BE FULLY MET. PERMISSABLE DEVIATIONS ON SIZES OF POLES SHALL BE IN ACCORDANCE WITH ENATS 43-88 ISSUE 5 (FEB 2010) CLAUSE 5.1.3. WHERE SIZES OF POLE ARE TO EXCEED SPECIFIED PERMISSIBLE DEVIATIONS THE SUPPLIER SHALL DECLARE THIS IMMEDIATELY.

6. FOR GENERAL ARRANGEMENT DRAWING OF H POLE SECTION (UNSTAYED) REFER TO DRG A2/VCD/0023/030
7. ALL DIMENSIONS ARE IN mm, UNLESS NOTED

Rev.	Date	Prepared	Reviewed	Approved	Reason / Description of changes.
B	16/06/17	KS	AB/RB	RMJB	GENERAL NOTE 3 MODIFIED.

IBERDROLA Engineering & Construction

Status Stamp:

Project: 132kV OHL NORTH WALES WIND FARM CONNECTIONS

Location:

Contractor: Voltcom GROUP

Status Stamp:

Drg. Title: WOOD POLE SCARFING DETAILS SECTION UNSTAYED

Client: SP ENERGY NETWORKS

Date of First Issue: 24/03/17

Prepared	Reviewed	Approved
KS	RGM	RMJB

Drg. No.: -

Sheet: 1 Next: -

Rev: B

Contractors Drg. No. : A3/VCD/0023/021

Scale: NTS

Size: A3

All rights reserved. Total or partial reproduction of this drawing without authorisation of the proprietor is prohibited.