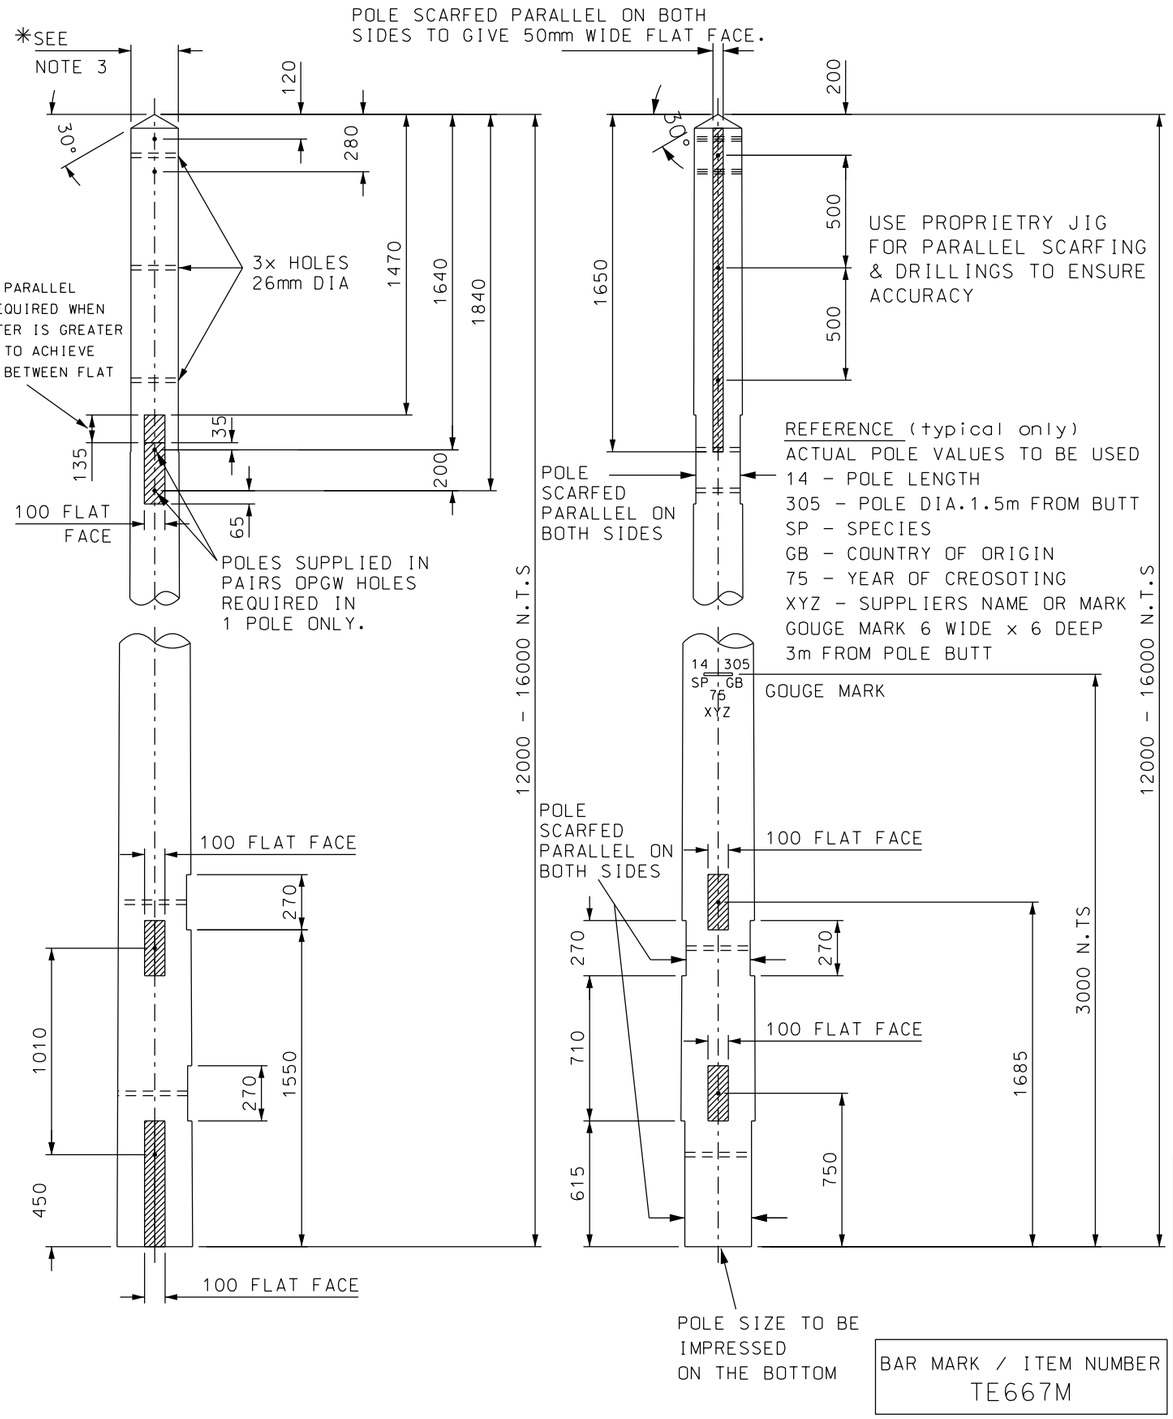


BAR MARK / ITEM NUMBER
TE667M

GENERAL NOTES:

1. ALL DRILLINGS TO BE 24mm DIAMETER HOLES UNLESS OTHERWISE NOTED
2. POLE SIZES ARE EXTRA STOUT POLES & TO BE BASED ON DIMENSIONS GIVEN IN SPEN SPECIFICATION OHL-03-132 ISSUE 2.
3. RANGE OF POLES IS LENGTH 12m TO 16m. MINIMUM DIAMETER 1.5m FROM BUTT = 350mm (12m), 380mm (13m), 410mm (14m), 450mm (15m) & 450mm (16m) MINIMUM.
 POLE TOP DIAMETER = 225 (12m), 228mm (13m), 233mm (14m), 240mm (15m) & 280mm (16m).
4. POLES TO BE PARALLEL WITHIN LIMITS AT LOCATION AS INDICATED ON THIS DRAWING.
 * MINIMUM TOP DIST BETWEEN FLATS = 200mm
 * MAXIMUM TOP DIST BETWEEN FLATS = 265mm
5. SCARFING & DRILLING SHALL BE TO THE DIMENSIONS AS SPECIFIED IN THIS DRAWING. STATED MINIMUM & MAXIMUM VALUES SHALL NOT BE EXCEEDED.

 REQUIREMENTS UNDER OHL-03-005 ISSUE 5 (DATED MAY 2015) SHALL BE FULLY MET. PERMISSABLE DEVIATIONS ON SIZES OF POLES SHALL BE IN ACCORDANCE WITH ENATS 43-88 ISSUE 5 (FEB 2010) CLAUSE 5.1.3. WHERE SIZES OF POLE ARE TO EXCEED SPECIFIED PERMISSIBLE DEVIATIONS THE SUPPLIER SHALL DECLARE THIS IMMEDIATELY.

6. FOR GENERAL ARRANGEMENT DRAWING OF 20 - 35° ANGLE, REFER TO DRG No. A2/VCD/0023/033.
7. ALL DIMENSIONS ARE IN mm, UNLESS NOTED

Rev.	Date	Prepared	Reviewed	Approved	Reason / Description of changes.
B	14/09/17	KS	RGM/RB	RMJB	16m HEIGHT POLE DETAILS ADDED.

IBERDROLA Engineering & Construction

Contractor: Voltcom GROUP

Client: SP ENERGY NETWORKS

Status Stamp:

Status Stamp:

Project: 132kV OHL NORTH WALES WIND FARM CONNECTIONS

Location:

Drg. Title: WOOD POLE SCARFING DETAILS 20 - 35° ANGLE STRUCTURES

Date of First Issue: 24/03/17		
Prepared	Reviewed	Approved
KS	RGM	RMJB

Drg. No.: -

Sheet: 1 Next: -

Rev: B

Contractors Drg. No. : A3/VCD/0023/024

Scale: NTS

Size: A3

All rights reserved. Total or partial reproduction of this drawing without authorisation of the proprietor is prohibited.