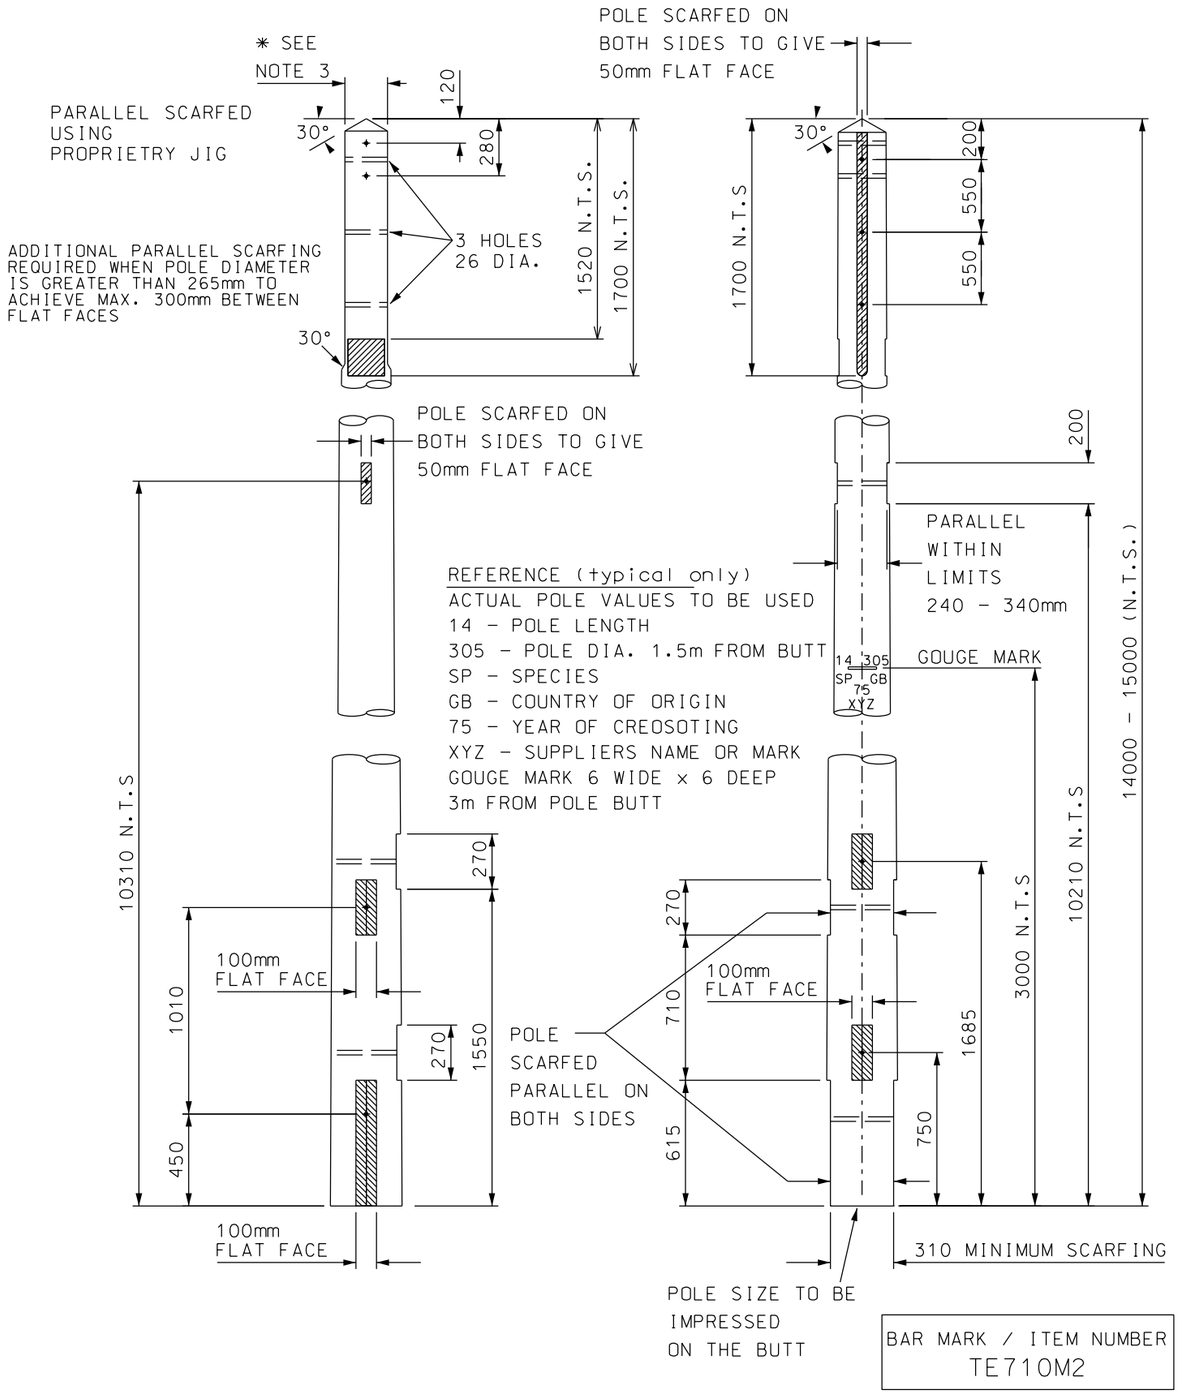


GENERAL NOTES:

1. ALL DRILLINGS TO BE 24mm DIAMETER HOLES UNLESS OTHERWISE NOTED
2. POLE SIZES ARE EXTRA STOUT POLES & TO BE BASED ON DIMENSIONS GIVEN IN SPEN SPECIFICATION OHL-03-132 ISSUE 2.
3. POLE LENGTH IS 14m. MINIMUM DIAMETER 1.5m FROM BUTT = 410mm.
 POLE TOP DIAMETER = 230mm.
4. POLES TO BE PARALLEL WITHIN LIMITS AT LOCATION AS INDICATED ON THIS DRAWING.
 - * MINIMUM TOP DIST BETWEEN FLATS = 200mm
 - * MAXIMUM TOP DIST BETWEEN FLATS = 265mm
5. SCARFING & DRILLING SHALL BE TO THE DIMENSIONS AS SPECIFIED IN THIS DRAWING. STATED MINIMUM & MAXIMUM VALUES SHALL NOT BE EXCEEDED.

 REQUIREMENTS UNDER OHL-03-005 ISSUE 5 (DATED MAY 2015) SHALL BE FULLY MET. PERMISSABLE DEVIATIONS ON SIZES OF POLES SHALL BE IN ACCORDANCE WITH ENATS 43-88 ISSUE 5 (FEB 2010) CLAUSE 5.1.3. WHERE SIZES OF POLE ARE TO EXCEED SPECIFIED PERMISSIBLE DEVIATIONS THE SUPPLIER SHALL DECLARE THIS IMMEDIATELY.

6. FOR GENERAL ARRANGEMENT DRAWING OF 4 POLE TERMINAL, REFER TO DRG No. A2/VCD/0018/034.
7. ALL DIMENSIONS ARE IN mm, UNLESS NOTED

Rev.	Date	Prepared	Reviewed	Approved	Reason / Description of changes.

IBERDROLA Engineering & Construction

Contractor: Voltcom GROUP

Client: SP ENERGY NETWORKS

Status Stamp:

Status Stamp:

Project: DALSHANGAN-MARGREE-BLACKCRAIG 132 HDWP OHL

Location: MARGREE

Drg. Title: WOOD POLE SCARFING 4 POLE ENTRY TERMINAL STRUCTURE 14m POLE

Date of First Issue: 01/11/16			Drg. No.: -	Sheet: 1	Rev: A
Prepared	Reviewed	Approved		Next: -	
RGM	AB/WU	RMJB	Contractors Drg. No. : A3/VCD/0018/127	Scale: NTS	Size: A3

All rights reserved. Total or partial reproduction of this drawing without authorisation of the proprietor is prohibited.