


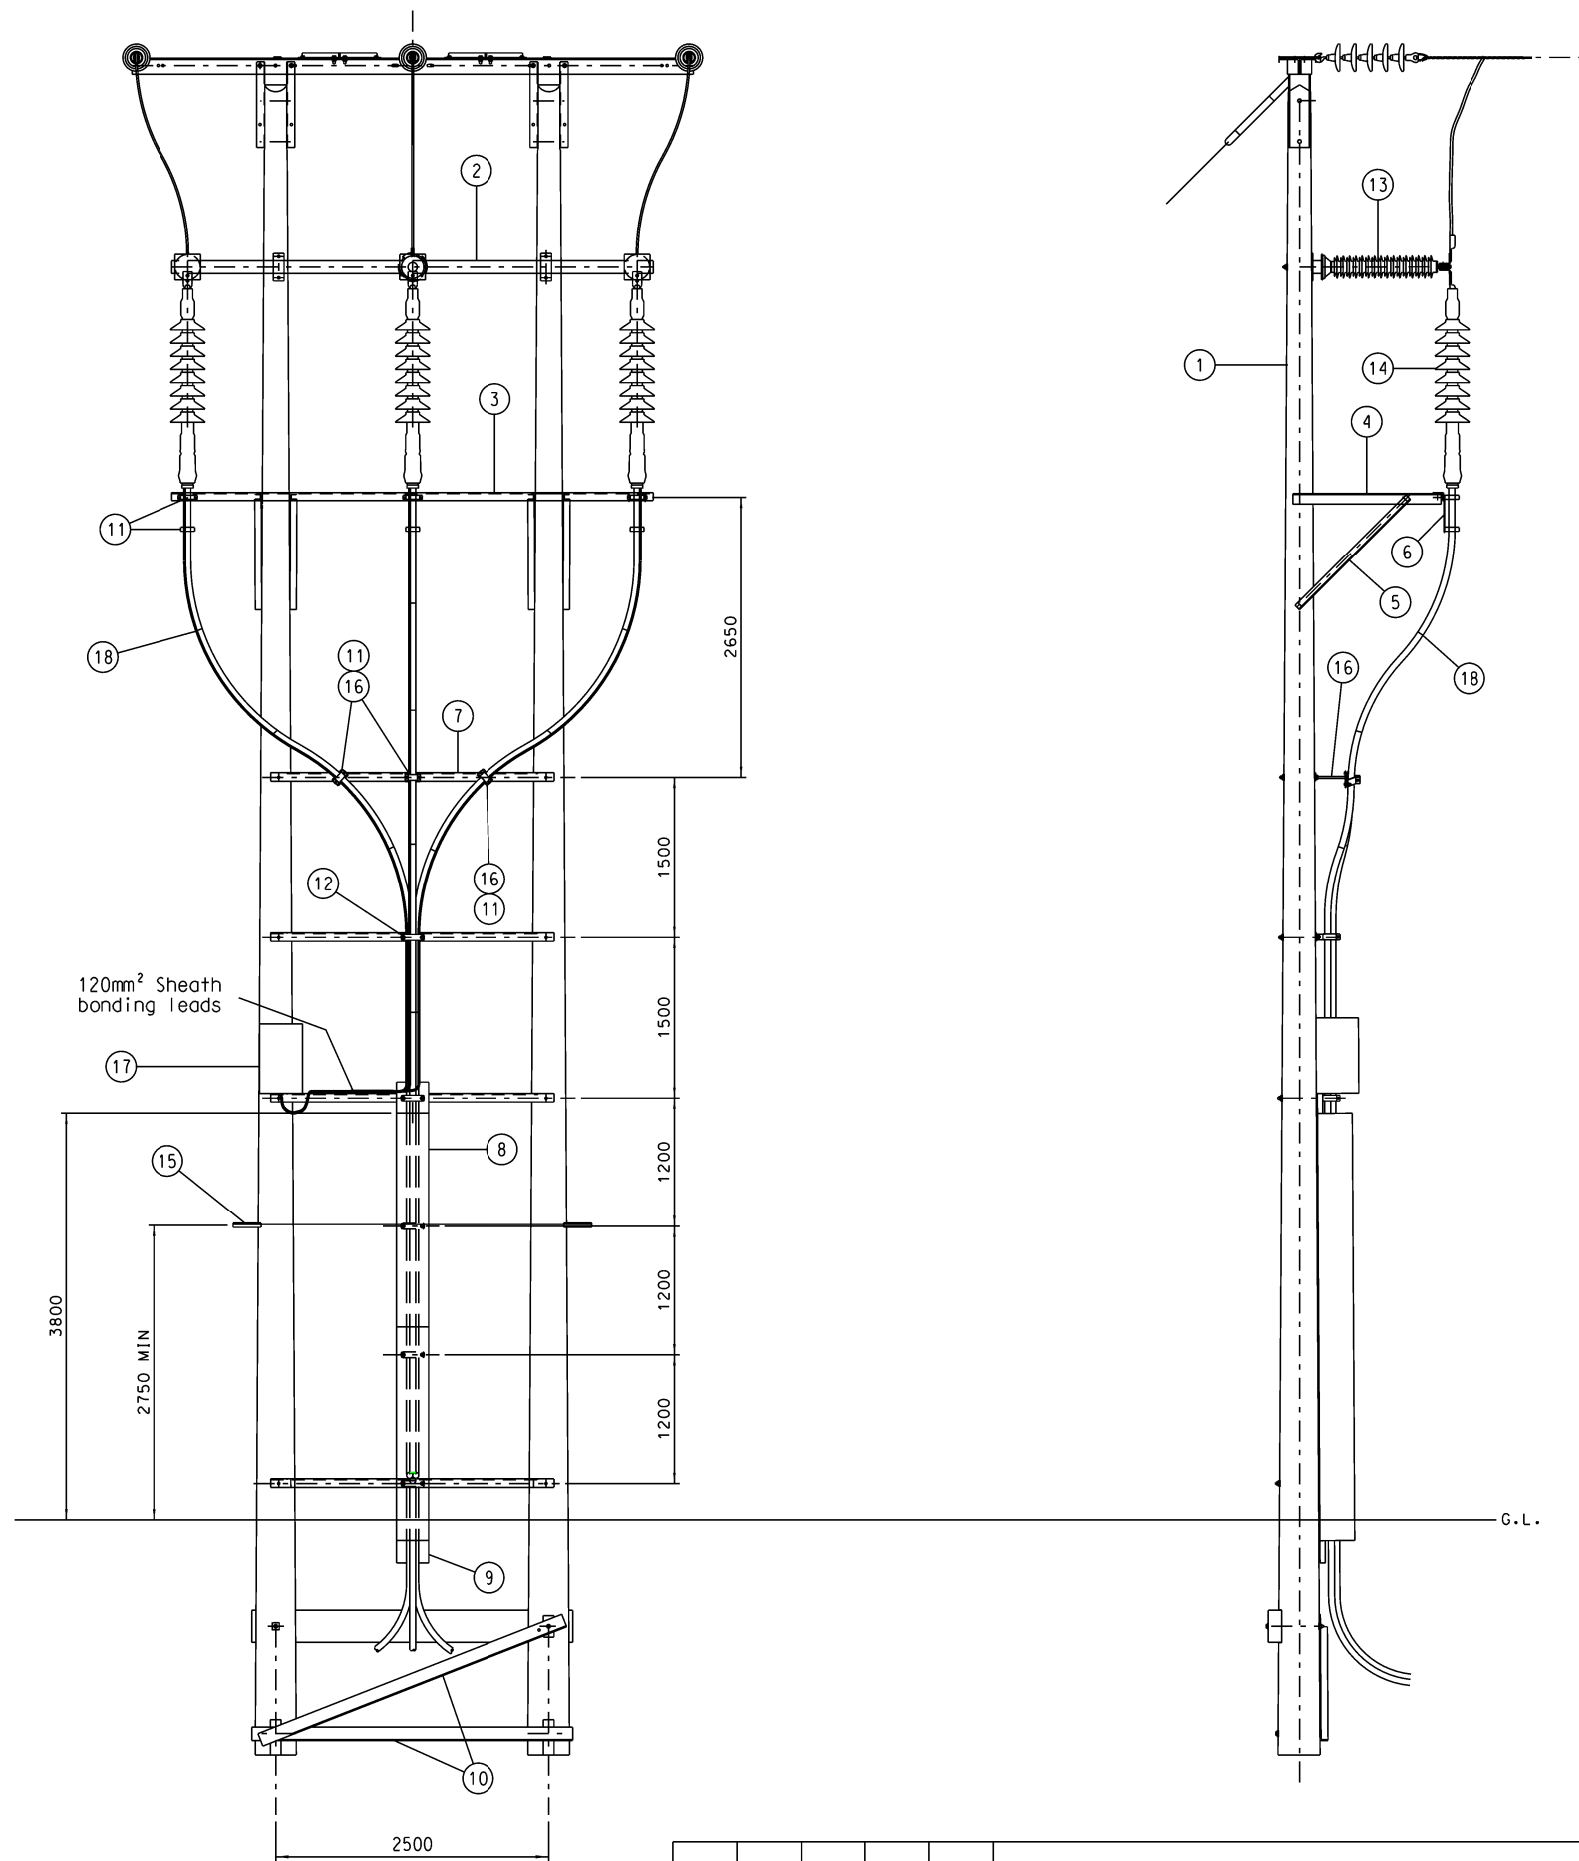

No.	ITEM	REFERENCE	No. OFF	REMARKS
1	TERMINAL 'H' POLE	ENATS 435013	1	SEE NOTES
2	SURGE ARRESTER STEELWORK	WPD 0101168	1	
3	CABLE TERMINATION CROSSARM	WPD 0102222	1	
4	TERMINATION CROSSARM SUPPORT	WPD 0102222	2	
5	STRUT 2.5m CROSSARM	ENATS 439536	4	
6	CABLE CLEAT SUPPORT	WPD 0102222	3	
7	CABLE SUPPORT CROSSARM 'B'	ENATS 439552		AS REQUIRED
8	CABLE GUARD	ENATS 439553	2	
9	CABLE BACKBOARD	ENATS 435018	1	
10	'H' POLE FOUNDATION BRACE	ENATS 439545	1	
11	SINGLE CABLE CLEAT	ATLAS (2 Bolt)	9	
12	TREFOIL CABLE CLEAT	ATLAS (2 Bolt)		AS REQUIRED
13	66kV SURGE ARRESTER		3	
14	3M Q TEN TERMINATION KIT		3	
15	ANTI-CLIMBING DEVICE			SEE NOTES
16	SWIVEL PLATE	WPD 0111920	8	
17	LINK BOX		1	SEE NOTES
18	CABLE TIE			AS REQUIRED

- NOTES
- ITEM 1 TO INCLUDE ALL ITEMS FROM 435013 EXCEPT Nos 2, 23, 24 & 25.
 - REQUIREMENTS FOR ANTI-CLIMBING GUARDS ARE DETAILED IN WPD 43-90
 - THE MINIMUM BENDING RADIUS IS 20D WHERE D=DIAMETER OF THE SINGLE CORE CABLE IN MILLIMETRES.
 - GANTRY MOUNTED LINK BOX FOR SOLIDLY BONDED CABLE AT BOTH ENDS (LBM 5 AVAILABLE FROM PRYSMAN).
 - ALL FIXINGS TO ENA STANDARD 43-96.

						ORIGINAL ISSUE	Date	WESTERN POWER DISTRIBUTION Design Department. Avonbank, Feeder Road, Bristol BS2 0TB Tel: 0117 933 2000
--	--	--	--	--	--	----------------	------	--