


MATERIALS LIST.


Item	Nº	Commodity Code	Description	Drawing or Ref.Number	M 20 Bolts	Washers		
						sc	sf	r
14	2	BPC 024	Wood Pole	Y204 L 0605				
19	2	217497	Brace Block	Y204 L 0301	4(Pole)	4	4	
24	1	223669	Crossarm Member	Y204 L 0904	4 x 300*			
60	3		33kV Tension Set	Y204 L 0704				
70	2	294181	Safety Sign	Y201 L 1002				
71			Operational Plates	Y201 L 1001/7				
73	4		Stay Arrangement	Y204 L 0501				
74	1	224519	Anti- Climbing Guard	Y201 L 1101/2				
98	1		33kV Cable Support Steelwork	Y204 L 0907	10(Pole)	10		
94	1	224535	Cable Guard	Y204 L 0911	4 x 50			
97	9		33kV Cable Cleats Single					
97	3		33kV Cable Cleats Trefoil					
L3	3		Straight Lug 95/125mm ²					
A	12		2 x 12mm Stud					
B	3		M14 x 60 bolts					
			Termination Plate	Y 204 L 0803				

* 8 off M20 x 45 bolts also required for gusset plates.

Pole Planting Depth	
Pole Length (m)	Dim S (m)
<=11.5	1.80
12.0 - 13.0	2.00
14.0 - 15.0	2.10
16.0 - 17.0	2.25
18.0 - 20.0	2.40

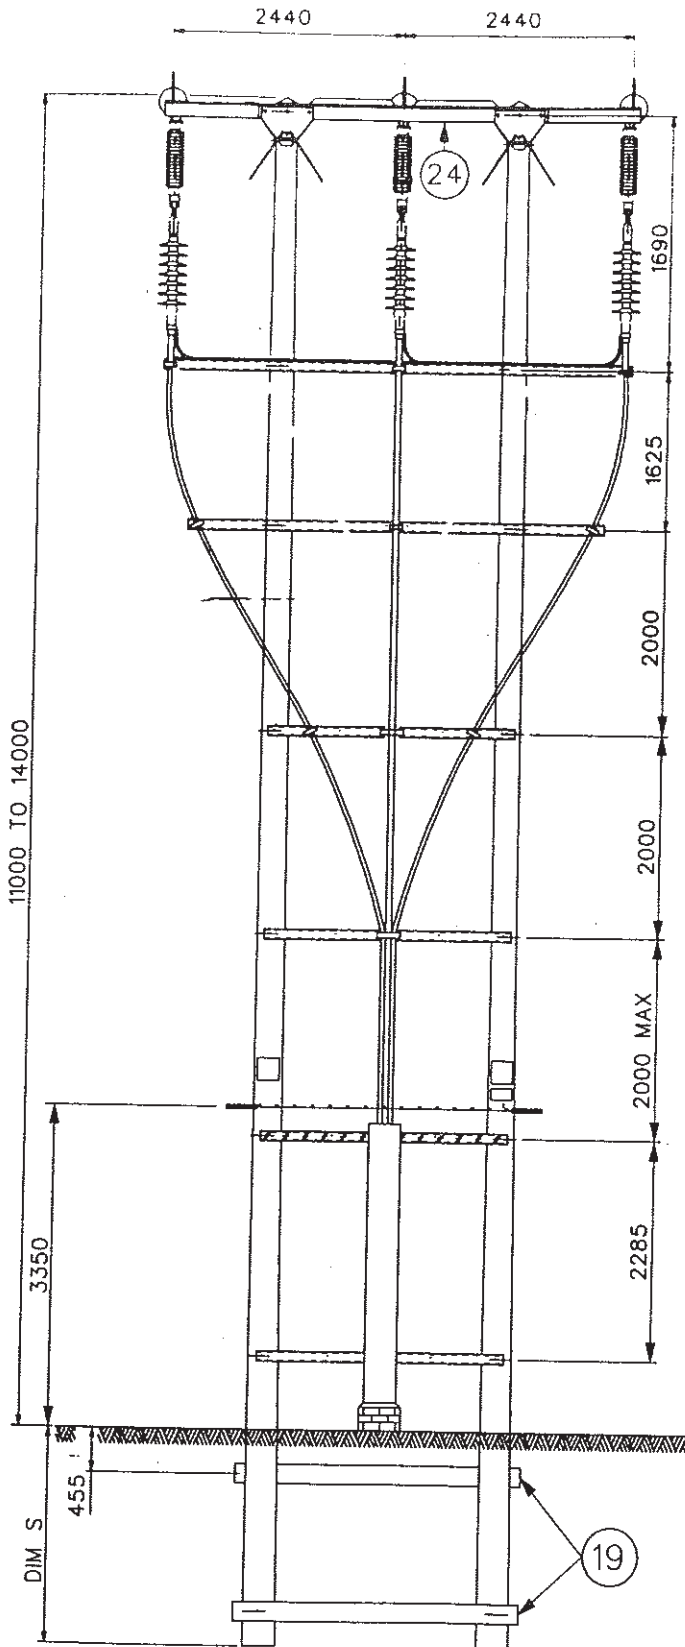

ELEVATION

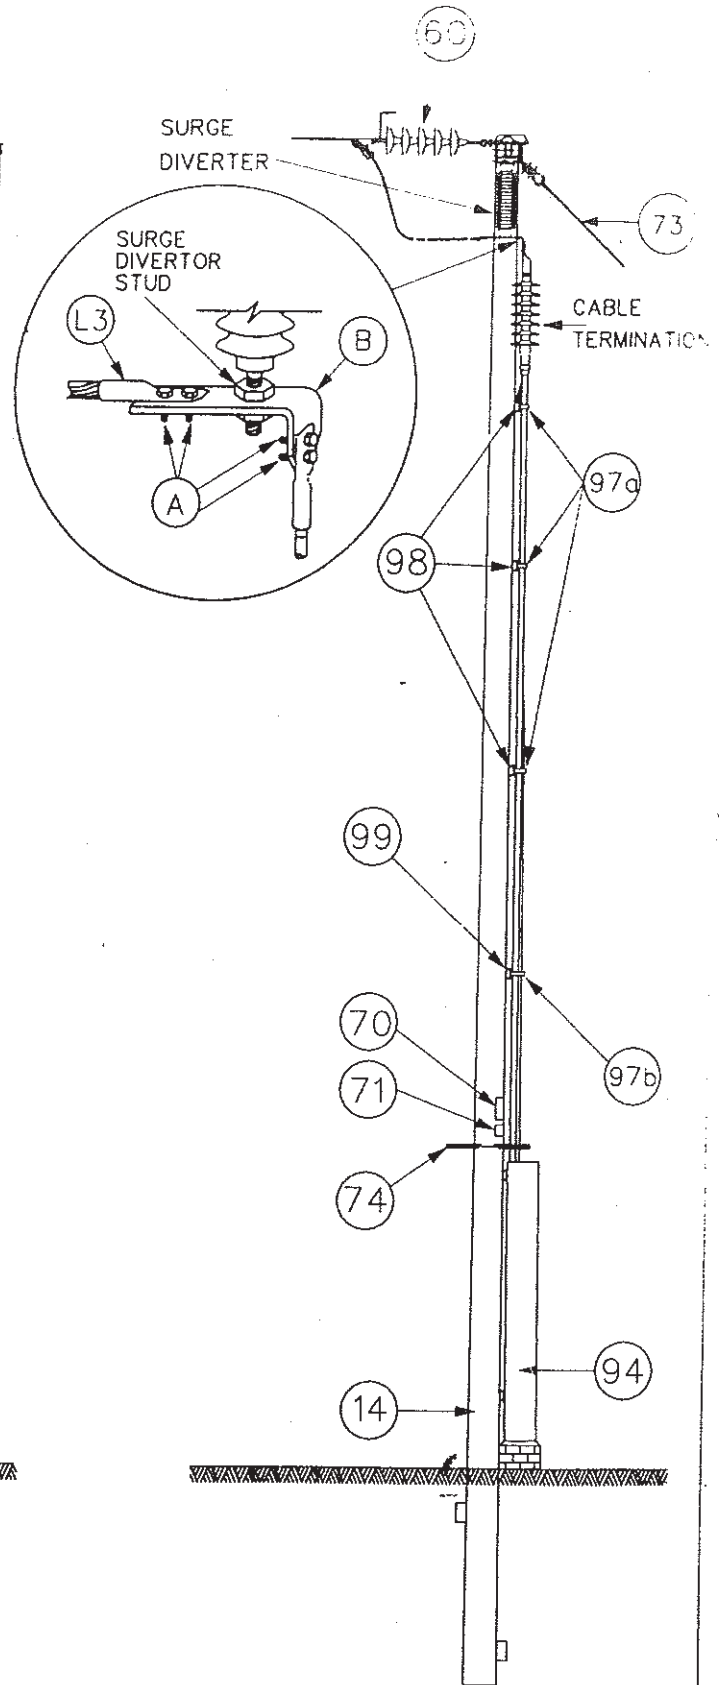

SIDE ELEVATION

DIMENSIONS IN MILLIMETRES

drawn	G.R. 12.5.94	33kV POLYMERIC CABLE TERMINATION WITH POLYMERIC TYPE HEC36 SURGE DIVERTERS CE/C/37 (M)		
traced	S.W. 12.5.94			
checked	-			
approved	C.N.			
revision	-	date	18.3.98	original scale
			NTS	Y104L0109
				CAD