
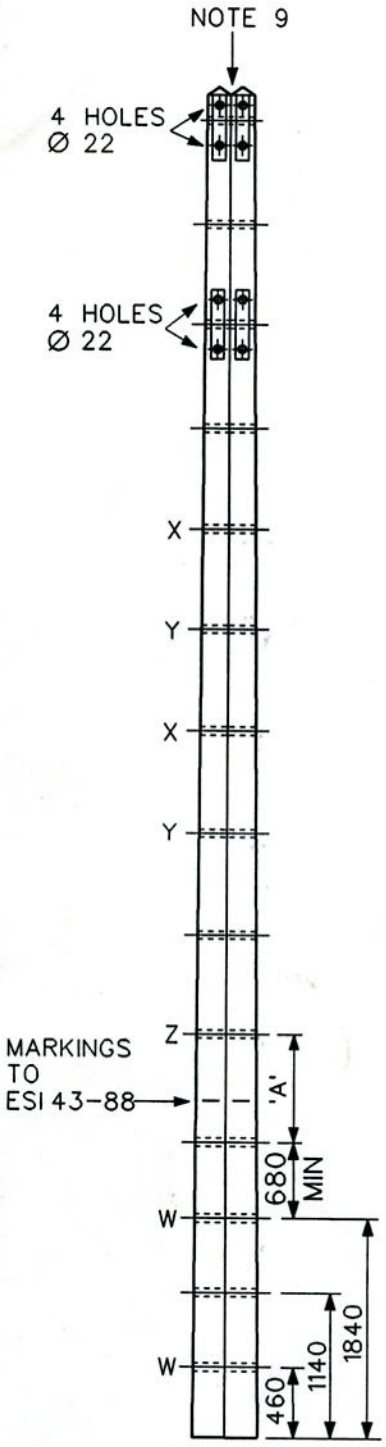


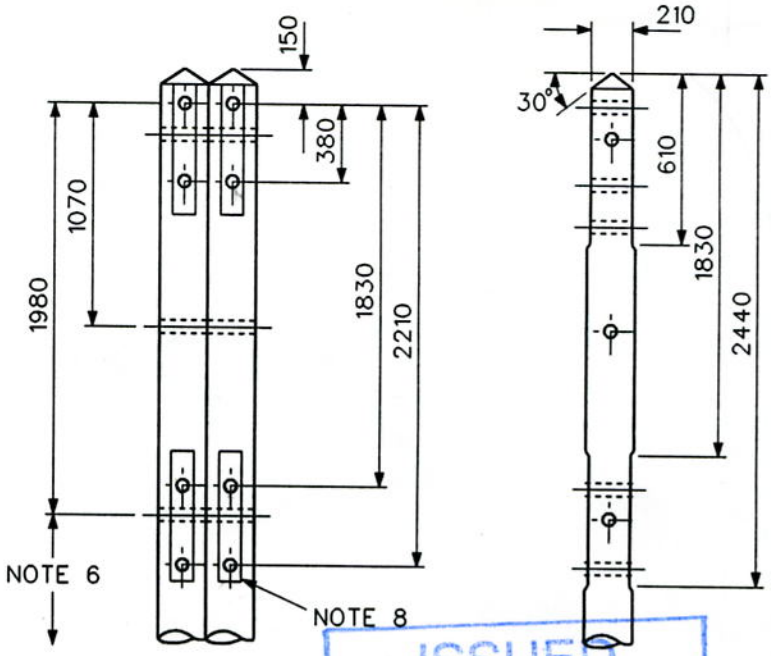

ISSUED
17 JUL 1995

NOTES

1 POLES TO BE 'STOUT CLASS' TO BS 1990. EACH SUPPORT TO BE FULLY ASSEMBLED, THEN CLAMPING BOLT NUTS TO BE SLACKENED 2 FULL TURNS BEFORE CREOSOTING TO BS 913 BY RUEPING PROCESS. NUTS TO BE RETIGHTENED AFTERWARDS.

2 POLES TO BE MATCHED FOR H STRUCTURES, EACH PAIR OF POLES TO BE MARKED WITH IDENTICAL PAIRING NUMBERS.

3 MINIMUM POLE TOP DIAMETER 165mm FOR POLES UP TO 15m AND 180mm FOR POLES TALLER THAN 15m

4 ALL HOLES 26mm UNLESS STATED OTHERWISE.

5 24mm CLAMPIMG BOLTS TO BE FITTED WITH 2x65x65x6mm CURVED SQUARE WASHERS AND ONE FULL NUT, ALL TO COMPLY WITH BS 916 AND GALVANISED TO BS 729.

6 REMAINING CLAMPING BOLT HOLES TO BE SPACED AT 910mm INTERVALS UNLESS DETAILED OTHERWISE.

7 CLAMPING BOLTS NOT REQUIRED IN HOLES
'W' AND 'X' FOR POLES UP TO 13m
'W' AND 'Y' FOR 14m POLES
'W', 'Y' AND 'Z' FOR POLES TALLER THAN 14m

8 POLES SCARFED TO GIVE 50mm MINIMUM FLAT ON BOTH SIDES OF EACH LIMB.

9 50mm MINIMUM FLAT, FULL LENGTH OF POLE TO BRING POLE SURFACES INTO CLOSE CONTACT.

10 ALL POLE FABRICATION TO BE CARRIED OUT BEFORE CREOSOTING.

POLE LENGTH (m)	DIM 'A' (m)
11.5	0.9
12.0	1.2
13.0 & 14.0	1.1
15.0 – 17.0	1.2
18.0	1.1

DIMENSIONS IN MILLIMETRES

drawn BT				
traced JEC	POLE FABRICATION SECTION SUPPORT CE/OM/DC 1 (M)			
checked JMP				
approved				
revision	date 5-9-90	original scale	Y205L0602 CAD	

Yorkshire Electricity

Copyright of the YORKSHIRE ELECTRICITY GROUP plc. No part to be reproduced without prior permission.