

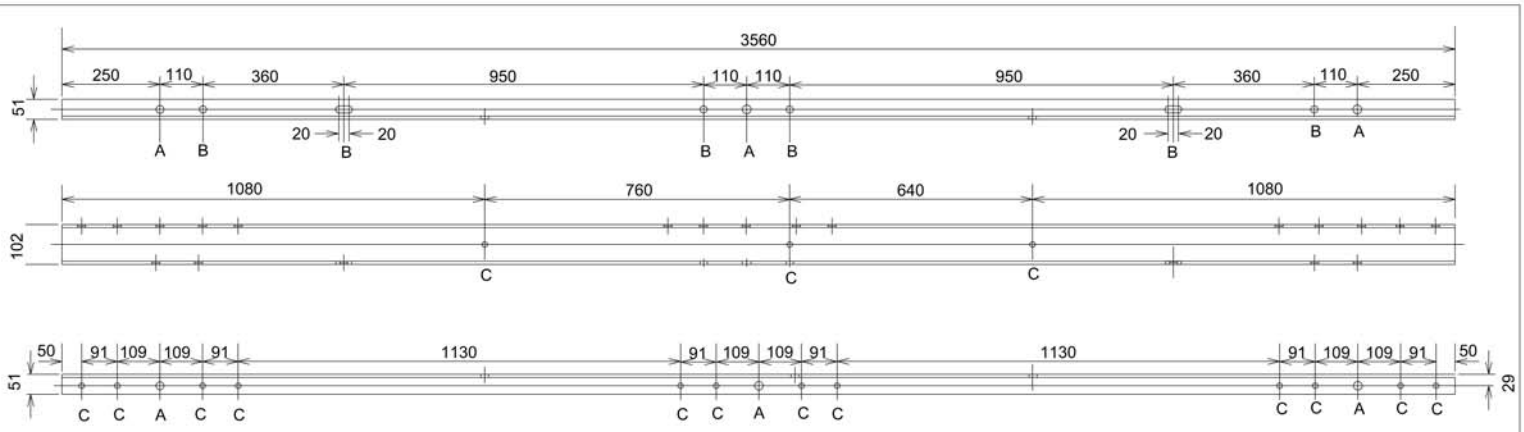


ITEM 1 - 102 x 51 CHANNEL 3560 LONG (FOR CABLE SEALING ENDS)

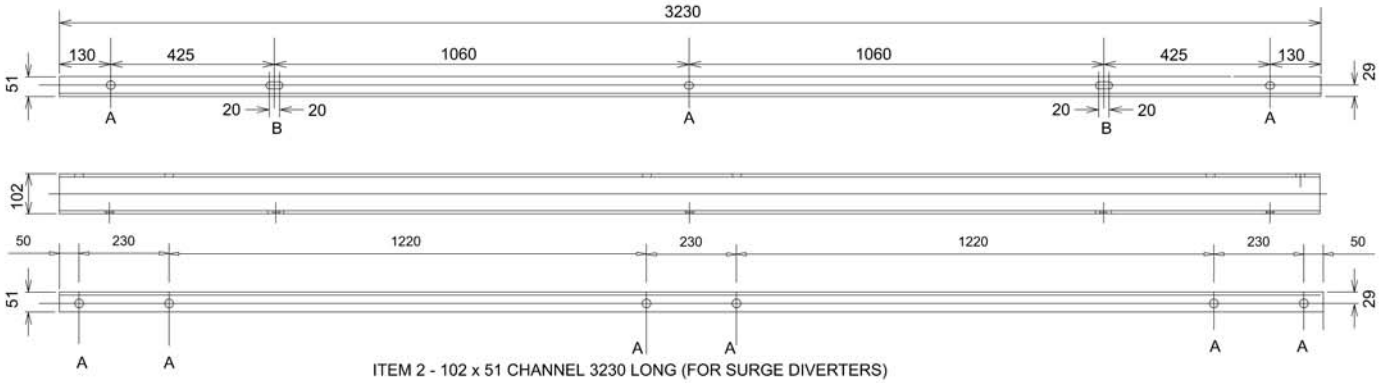


ITEM 2 - 102 x 51 CHANNEL 3230 LONG (FOR SURGE DIVERTERS)

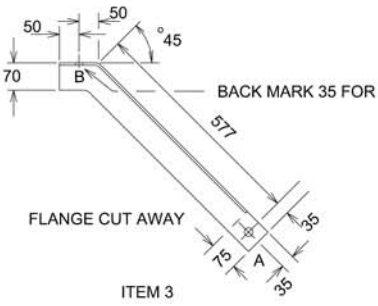


ITEM 3

70 X 70 X 6 ANGLE 710 LONG (APPROX)

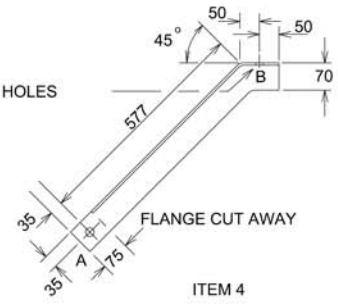


ITEM 4


70 X 70 X 6 ANGLE 710 LONG (APPROX)

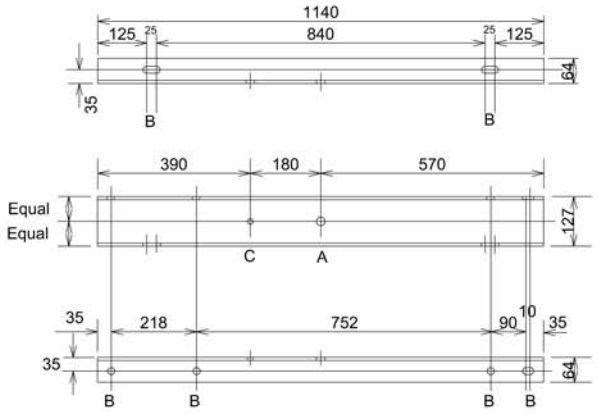

ITEM 5 - 127 x 64 CHANNEL 1140 LONG

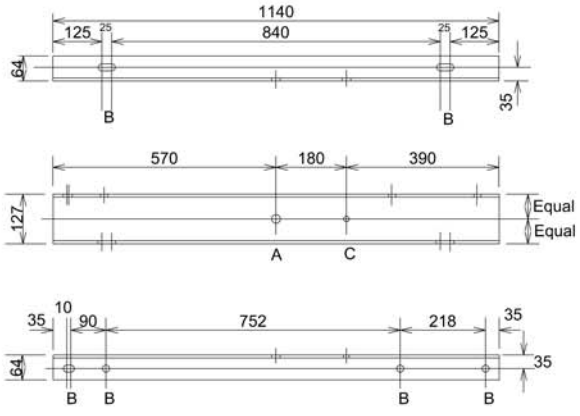

ITEM 6 - 127 x 64 CHANNEL 1140 LONG

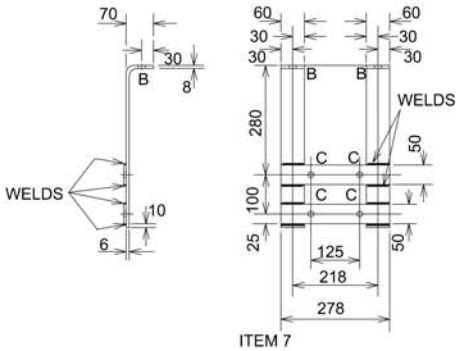

ITEM 7

60 X 8 AND 50 X 6 FLAT BAR

HOLE DIAMETERS
A = 22mm
B = 18mm
C = 14mm

ITEM No.	CAT.No
1	243559
2	243563
3	243578
4	243582
5	243597
6	243614
7	243629

NOTES
1. STEELWORK TO B.S.4360,GRADE 43A AND B.S.449
2. SECTIONS TO B.S.4229, PART 2 AND B.S.4848. PARTS 3 & 4
3. WELDING TO B.S.1856
4. GALVANISING TO B.S.729 AFTER FABRICATION

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE STATED

NEDL

Lloyds Court, 78, Grey Street, Newcastle Upon Tyne NE1 6AF

H.V. OVERHEAD LINES - HEAVY CONSTRUCTION

DETAILS OF STEELWORK FOR CABLE SEALING ENDS AND SURGE DIVERTERS
33kV H TERMINAL SUPPORT (SEE DRG 1.00.043.2002 SHEET 5)

Prepared by	J.L.W.	Drg.No.	1 09 101 0551	Sheet No.	1
Checked	Date Issued			Revised	MAY 2000
H.A.J.	7.3.75	Mods.	A B C D E F G H J K L	Scale	1:10