


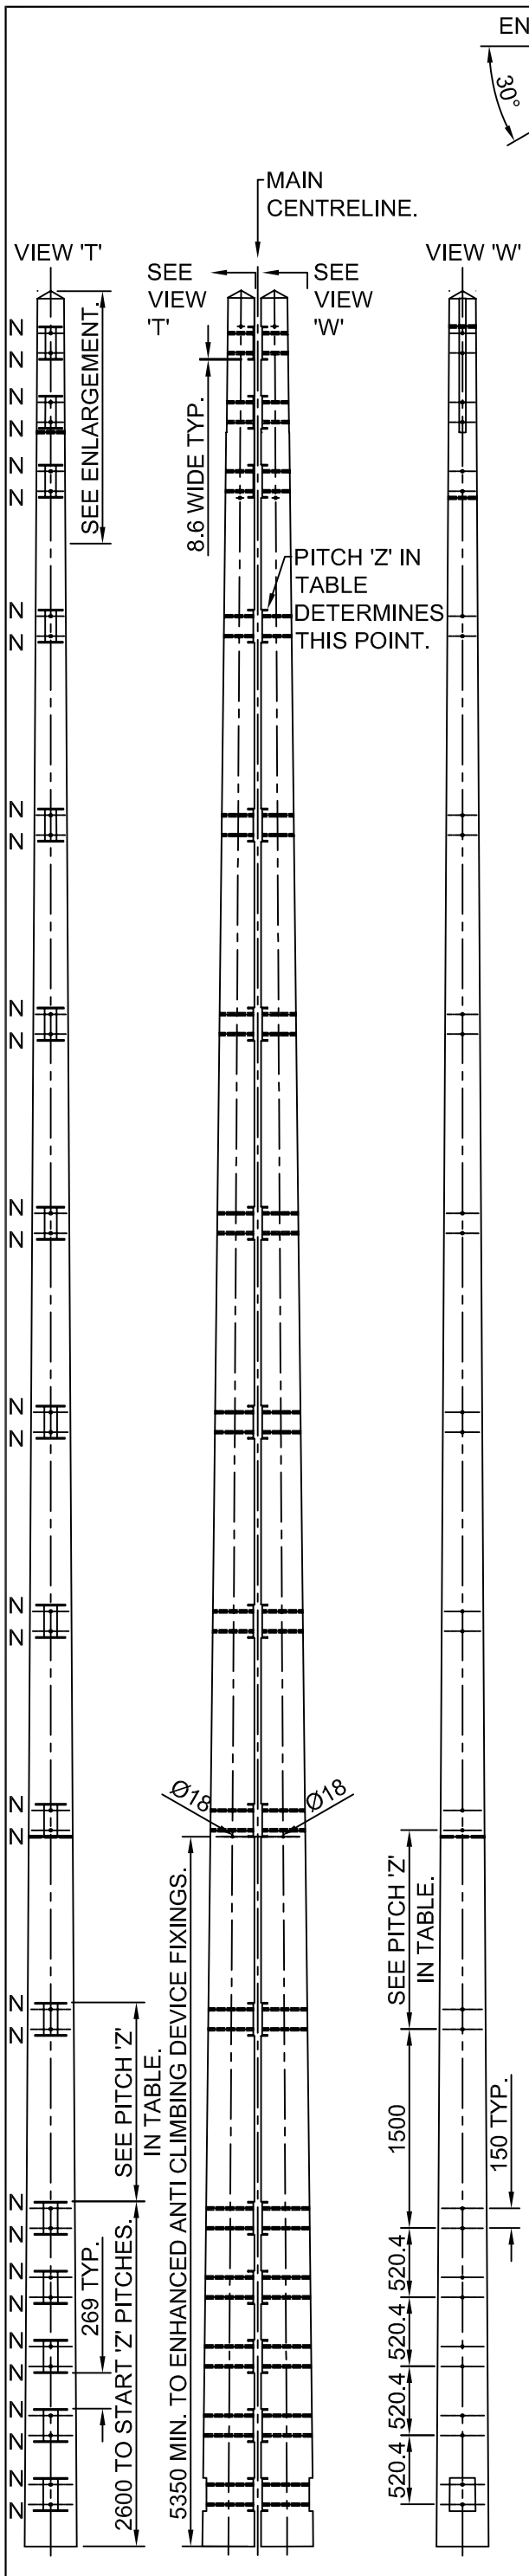


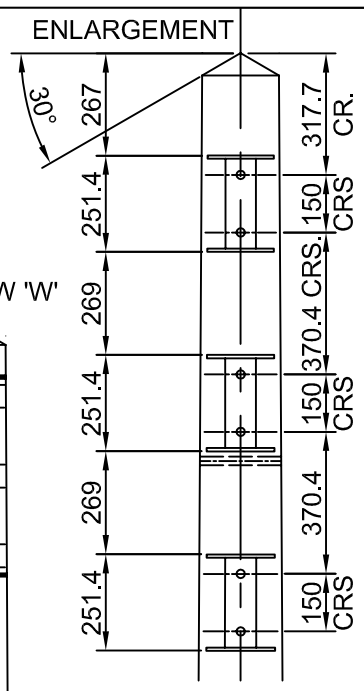


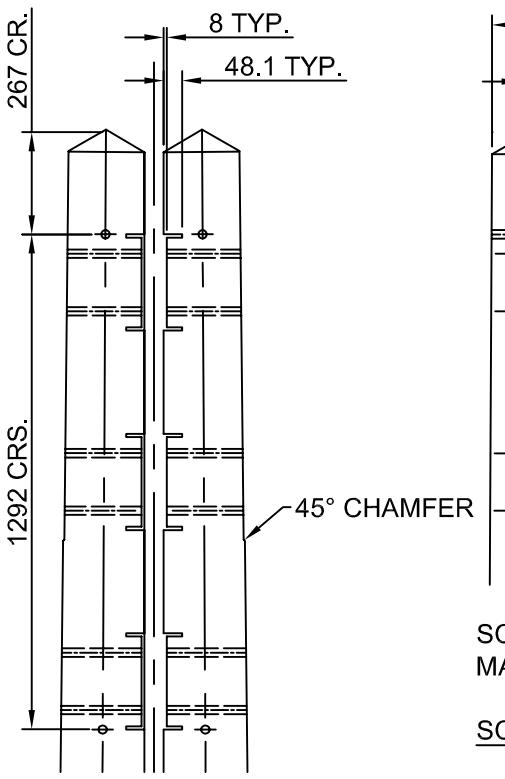

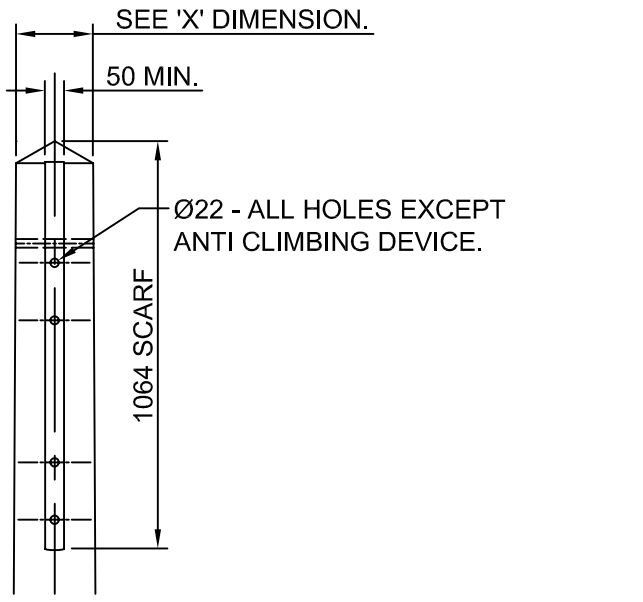

SCARFS AND HOLES ARE SYMMETRICAL ABOUT MAIN CENTRELINE.

SCALE 1:10

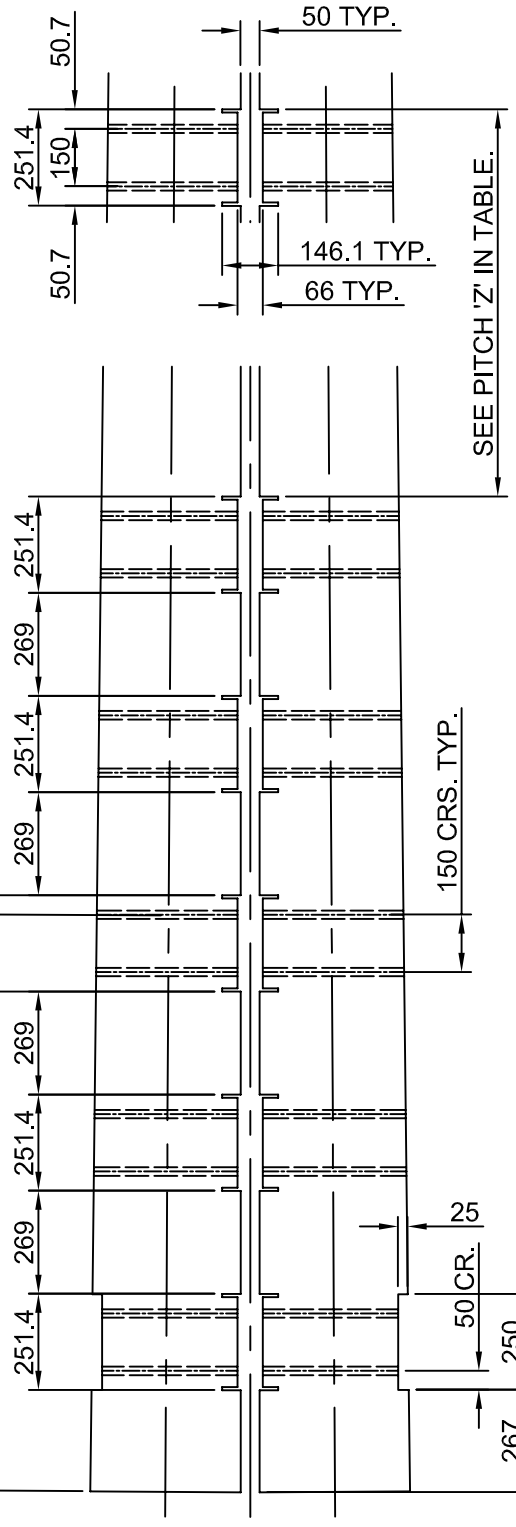

IMPORTANT NOTE

THE SCARF IS PARALLEL TO THE POLE EDGE & NOT THE POLE CENTRELINE.

SCARFING TO BE CUT TO GIVE A 50mm WIDE FLAT ON TWO DIAMETRICALLY OPPOSITE FACES WITH ENDS CHAMFERED AS SHOWN.

GENERAL NOTES

1. POLES TO BE SELECTED IN MATCHED PAIRS AND LAID OUT TO FACILITATE DRILLING SIMULTANEOUSLY.

2. CLASS OF POLE TO BE STOUT IN ACCORDANCE WITH 1.09.101.0238

3. POLE BUTT TO BE CUT AT RIGHT ANGLES TO AXIS OF POLE.

4. ALL HOLES EXCEPT WHERE STATED OTHERWISE TO BE 22mm DIA. DRILLED AT RIGHT ANGLES TO MAIN CENTRELINE OF POLE. ALL DRILLING & CUTTING TO BE DONE STRICTLY TO TEMPLATE PRIOR TO CREOSOTING.

5. SHEAR BLOCK NOTHES SHOULD BE MARKED OFF SIMULTANEOUSLY ON PAIRED POLES & DRILLED TO ACCOMMODATE FIXINGS TOGETHER.

6. NOTCHES SHOWN (17 METRE POLE) ARE CUT FROM THE BASE AS A DATUM.

NOTCHES 'N' ARE 8.6 HIGH x 48 DEEP MEASURED FROM THE INNER FACES OF EACH POLE & SQUARE TO THE 'MAIN CENTRELINE. BETWEEN EACH PAIR OF NOTCHES A FLAT IS CREATED 8mm DEEP MEASURED, FROM THE INNER FACES OF THE POLE & SQUARE TO THE MAIN CENTRELINE TO ACCOMMODATE THE SPACERS.

ITEM	POLE HEIGHT	DIMENSION 'X' (Min/ Max)	DIMENSION 'Y' (Min/ Max)	PITCH 'Z'
F	17000 mm	Ø200 mm - Ø236 mm	Ø375 mm - Ø412 mm	8 x 1500

CE Electric UK

Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF

Manufacturer Details

Sheet No. 2	Scale 1:50 & 1:20
Prepared By TREVOR R. WILKIN	
Revised	Grid Reference
Date Issued 04/01/2007	Checked By

132kV OVERHEAD LINES DRILLING, SCARFING & MARKINGS FOR RUTTER TYPE 17 METRE STOUT POLE WITH STEEL SHEAR BLOCKS FROM UNIVERSAL BEAM

Type OVERHEAD

DOCUMENT_SUB_CLASS

Ref No. 62470B

Historic Drg.No. 1 09 139 0009

Revision Notes